



Gaoyi Tech Limited
Add: 5 Floor, F2 Building, Huafeng Industrial Zone, Xixiang
Town, BaoAn District, Shenzhen, 518126, China
Tel: +86-755-29766262 29643512 29784796
Fax: +86-755-29766161
Email: sales@gaoyitech.com
Website: www.gaoyitech.com www.gaoyitech.en.alibaba.com





About Gaoyi

Gaoyi Tech ("Gaoyi"), founded in 2005, is one of the leading manufacturers in the global market that specializes in R&D, manufacturing, sales and OEM&ODM services for quick car charger, USB car charger, smartphone in-car charger holder, home appliances, car FM transmitter and Bluetooth products, etc.

A decade of presence in the market substantiates Gaoyi's continuous growth. Gaoyi has significantly expanded over the years. At present, We've invested heavily in R&D. We gained rich experience in cost management, quality control and after-sales services. Gaoyi employs more than 180 staff and has a factory of 4,200 square meters with an annual production capacity of 5,760,000 pieces. In 2014 we have obtained the BSCI certificate and obtained ISO9001 certificate in 2015. All the products are certified by CE, FCC, RoHS, etc and get 32 patents and products are suitable for varied needs of international market.

Gaoyi products are popular and have high demand for the distributors, wholesalers, importers which are from more than one hundred countries across Europe, North America, South America, Asia, Australia and Middle East.



Wireless charger



● Page 1-6

Car charger



● Page 7-22

FM transmitter



● Page 23-24

Car charger Holder



● Page 25-26

Car Holder



● Page 27-40

Product Rang

Qi Wireless Charger Gravity Car Holder



Quick charge



Intelligent control



Efficient conversion



Wireless charging

Qi FC CE RoHS



Specification X8W+HC33

- Material: Aluminum alloy + ABS
- Standard: Qi V1.2.4 standard
- Input: DC5V, 2A 12V, 1.2A (QC3.0)
- Output: DC 5V/1A, 5V /1.5A, 9V/1.1A (5W, 7.5W, 10W)
- Transmission Distance: ≤ 8 mm
- Charging efficiency: 83% max
- Frequency: 110-205KHZ
- Easy to use, single hand operation
- Auto lock and release due to gravity linkage
- Fit for 4.7-6.0 inch devices (width: 60-85mm)
- Strong gel-type absorption panel can be attached to dashboard as well as windshield glass.


Qi FC CE RoHS



Specification X8W+G72

- Material: Aluminum alloy + ABS
- Standard: Qi V1.2.4 standard
- Input: DC5V, 2A 12V, 1.2A (QC3.0)
- Output: DC 5V/1A, 5V /1.5A, 9V/1.1A (5W, 7.5W, 10W)
- Transmission Distance: ≤ 8 mm
- Charging efficiency: 83% max
- Frequency: 110-205KHZ
- Easy to use, single hand operation
- Auto lock and release due to gravity linkage
- Fit for 4.7-6.0 inch devices (width: 60-85mm)
- Press switch to install into car air vent clip

Qi Certified 10W/7.5W Wireless Charging Pad



Qi Certified 10W/7.5W Wireless Charging Pad



Specification X8

- Material: Aluminum alloy + ABS
- Standard: Qi V1.2.4 standard
- Input: DC5V, 2A 12V, 1.2A (QC3.0)
- Output: DC 5V/1A, 5V /1.5A, 9V/1.1A (5W, 7.5W, 10W)
- Transmission Distance: ≤ 8 mm
- Charging efficiency: 83% max
- Frequency: 110-205KHZ
- Works with all Qi compatible smartphones including the Samsung Galaxy S8, S8+, Note 8, S9, Apple iPhone 8, iPhone 8 Plus, iPhone X



Qi Wireless Charger Gravity Car Holder



Quick charge



Intelligent control



Efficient conversion



Wireless charging

Qi FC CE RoHS



Specification WX05i+HC33

- Material:ABS+PC
- Standard:Qi V1.2.4 standard
- Input:DC5V,2A 12V,1.2A(QC3.0)
- Output: DC 5V/1A, 5V /1.5A, 9V/1.1A((5W,7.5W, 10W))
- Transmission Distance: ≤ 8 mm
- Charging efficiency: 83% max
- Frequency:110-205KHZ
- Fit for 3.5-6.5 inch devices(width: 58-98mm)
- Telescopic Arm extends from 88mm to 128mm
- Pivots on 180° arc for a variety of optimal positions
- Strong gel-type absorption panel can be attached to dashboard as well as windshield glass

Qi FC CE RoHS



Specification WX05+HC22

- Material:ABS+PC
- Standard:Qi V1.2.4 standard
- Input:DC5V,2A DC9V,1.7A
- Output: DC5V,1A DC9V,1.1A (5W,10W)
- Transmission Distance: ≤ 8 mm
- Charging efficiency: 83% max
- Frequency:110-205KHZ
- Fit for 3.5-6.5 inch devices(width: 58-98mm)
- Strong gel-type absorption panel can be attached to dashboard as well as windshield glass

Qi FC CE RoHS



Specification WX05+G70

- Material:ABS+PC
- Standard:Qi V1.2.4 standard
- Input:DC5V,2A DC9V,1.7A
- Output: DC5V,1A DC9V,1.1A (5W,10W)
- Transmission Distance: ≤ 8 mm
- Charging efficiency: ≤ 83%
- Frequency:110-205KHZ
- Works with all Qi compatible smartphones including the Samsung Galaxy S8, S8+, Note 8, S9, Apple iPhone 8, iPhone 8 Plus, iPhone X
- Fit for 3.5-6.5 inches devices

3 Car Cigarette Lighter 4 Port USB Car Charger



UL FC CE RoHS

Specification HC67



- 4 USB port + 3 Sockets+ on/off switch with voltage screen display + 3 Separate Switch+ 3M double-sided adhesive sticker
- Input: DC 12-24V
- USB output: 5V / 2.4A +2.4A+1A+ 1A (Smart IC, Total:6.8A)
- Cigarette lighter power:60W for each socket (total:120W)
- Over current/voltage/load/charge/temperature/ short circuit/under voltage protection

UL **QC3.0** FC CE RoHS

Specification HC67A



- 18W QC3.0+ 3 USB port + 3 Sockets+ on/off switch with voltage screen display +3 Separate Switch+ Removable clip
- Input: DC 12-24V
- USB output: 5V / 2.4A +2.1A+1A(Smart IC, Total:5.5A)
- QC3.0 output: 3.6-6.5V / 3A, 6.5-9V / 2A,9-12V / 1.5A (18W max)
- Over current/voltage/load/charge/temperature/ short circuit/under voltage protection

UL FC CE RoHS

Specification HC67B



- 4 USB port + 3 Sockets+ on/off switch with voltage screen display + 3M double-sided adhesive sticker
- Input: DC 12-24V
- USB output: 5V / 2.4A +2.4A+1A+ 1A (Smart IC, Total:6.8A)
- Cigarette lighter power:60W for each socket (total:120W)
- Over current/voltage/load/charge/ temperature/short circuit/under voltage protection

3 Car Cigarette Lighter Car Charger With QC3.0 And PD



Type-C  FC CE RoHS

Specification HC67C



- 18W PD type-C+ 4 USB port + 3 Sockets+ on/off switch with voltage screen display +3 Separate Switch+3M double-sided adhesive sticker
- Input: DC 12-24V
- USB output: 5V / 2.4A *2+1A*2 (Total:6.8A)
- PD output: 5V / 3A, 9V / 2A, 2V /1.5A (18W max)
- Cigarette lighter power:60W for each socket (total:120W)
- Over current/voltage/load/charge/temperature/ short circuit/under voltage protection

Type-C  QC3.0 FC CE RoHS

Specification HC64



- QC3.0+ PD type-C +2 USB port + 3 Sockets+ on/off switch + voltage screen display + 3 Separate Switch+ Removable clip
- Input:DC 12-24V
- 2 USB output : 5V, 2.1A+1A
- QC 3.0 output : 5V 2.4A/9V2A/12/1.5A
- TYPE-C PD output : 5V 2.4A/9V2A/12/1.5A
- Car socket output : 120W (max)
- Over current/voltage/load/charge/temperature/ short circuit/under voltage protection

 QC3.0 FC CE RoHS

Specification HC64D



- QC3.0 +2USB port + 3 Sockets+ on/off switch + voltage screen display +3 Separate Switch+ Removable clip
- Input:DC 12-24V
- 2 USB output : 5V,2.1A+1A
- QC 3.0 output : 5V 2.4A/9V2A/12/1.5A
- Car socket output : 120W (max)
- 1 meter car charging cable
- Over current/voltage/load/charge/ temperature/short circuit/under voltage protection

3 Car Cigarette Lighter 4 Port USB Car Charger



4USB  **FC CE RoHS**

Specification **HC62B**

- Material: ABS+PC
- 4 USB port + 3 Sockets+ on/off switch + 3M double-sided adhesive sticker
- Input: DC 12-24V
- USB output :5V 2.4A+2.4A+1A +1A
- Power: 120W (max)
- Safety fuse: 10A
- 1 meter car charging cable
- 8A high capacity ampere for fast charging
- Over current/voltage/short circuit protection



4USB  **FC CE RoHS**

Specification **HC62D**

- Material: ABS+PC
- 4 USB port + 3 Sockets+ on/off switch + voltage screen display + 3M double-sided adhesive sticker
- Input: DC 12-24V
- USB output :5V 2.4A+2.4A+1A +1A
- Power: 120W (max)
- Safety fuse: 10A
- 1 meter car charging cable
- 8A high capacity ampere for fast charging
- Over current/voltage/short circuit protection

2 Car Cigarette Lighter Dual Port Car Charger



Type-C FC CE RoHS



Specification PD63-d

- Material: ABS+PC
- 18W PD type-C+ 2.4A USB + 2 Sockets+ on/off switch with voltage screen display
- Input: DC 12-24V
- USB output: 5V / 2.4A (Smart IC)
- PD type-C output: 5V / 3A, 9V / 2A, 12V / 1.5A (18W max)
- 0.6 meter car charging cable.
- 3M double-sided adhesive sticker
- Over current/voltage/short circuit protection

Qualcomm Quick Charge 3.0 FC CE RoHS



Specification HC63a-d

- Material: ABS+PC
- 18W QC3.0+ 2.4A USB + 2 Sockets+ on/off switch with voltage screen display
- Input: DC 12-24V
- USB output: 5V / 2.4A (Smart IC)
- QC3.0 output: 3.6-6.5V / 3A, 6.5-9V / 2A, 9-12V / 1.5A (18W max)
- 0.6 meter car charging cable.
- 3M double-sided adhesive sticker
- Over current/voltage/short circuit protection

2 USB FC CE RoHS



Specification HC63-d

- Material: ABS+PC
- 2.4A X2 USB + 2 Sockets+ on/off switch with voltage screen display
- Input: DC 12-24V
- USB output: 5V / 2.4A *2 (Smart IC)
- 0.6 meter car charging cable.
- 3M double-sided adhesive sticker
- Over current/voltage/short circuit protection

Dual USB Car Charger 40W

Cigarette Lighter Socket Splitter



Type-C FC CE RoHS

Specification D40

- Material: ABS+PC
- Over current / voltage / short circuit protection
- Input: DC 12-24V
- USB output: 5V / 2.4A (Smart IC)
- PD type-C output: 5V / 3A, 9V / 2A, 12V / 1.5A (18W max)



Qualcomm Quick Charge 3.0 FC CE RoHS

Specification C40A

- Material: ABS+PC
- Over current / voltage / short circuit protection
- Input: DC 12-24V
- USB output: 5V / 2.4A (Smart IC)
- QC3.0 output: 3.6-6.5V / 3A, 6.5-9V / 2A, 9-12V / 1.5A (18W max)



2USB FC CE RoHS

Specification C40

- Material: ABS+PC
- Over current / voltage / short circuit protection
- Input: DC 12-24V
- USB output: 5V / 2.4A * 2 (Smart IC)

9.6 A ,4 Port Front & Back Seat Family Car Charger



Type-C FC CE RoHS

Specification PD75

- Input: DC 12-24V
- Cigar USB output: 5V / 2.4A * 2 (Smart IC)
- Back seat USB : USB1 - 5V / 2.4A (Smart IC)
USB2 - PD type-C output: 5V / 3A, 9V / 2A, 12V / 1.5A (18W max)



Qualcomm Quick Charge 3.0 FC CE RoHS

Specification C75A/C76A

- Input: DC 12-24V
- Cigar USB output: 5V / 2.4A * 2 (Smart IC)
- Back seat USB : USB1 - 5V / 2.4A (Smart IC)
USB2 - QC3.0 output: 3.6-6.5V / 3A, 6.5-9V / 2A, 9-12V / 1.5A (18W max)



4 USB FC CE RoHS

Specification C75/C76

- Input: DC 12-24V
- Cigar USB output: 5V / 2.4A * 2 (Smart IC)
- Back seat USB : 5V / 2.4A * 2 (Smart IC)



Mini Dual USB Car Charger



Qualcomm Quick Charge 3.0 Type-C

Specification PD73A

- Input: DC 12-24V
- PD type-C output: 5V / 3A, 9V / 2A, 12V / 1.5A (18W max)
- QC3.0 output: 3.6-6.5V / 3A, 6.5-9V / 2A, 9-12V / 1.5A (18W max)



Type-C

Specification PD73

- Input: DC 12-24V
- USB output: 5V / 2.4A (Smart IC)
- PD type-C output: 5V / 3A, 9V / 2A, 12V / 1.5A (18W max)



Qualcomm Quick Charge 3.0

Specification C73A

- Input: DC 12-24V
- USB output: 5V / 2.4A (Smart IC)
- QC3.0 output: 3.6-6.5V / 3A, 6.5-9V / 2A, 9-12V / 1.5A (18W max)



2USB

Specification C73C

- Material: ABS+PC
- Over current / voltage / short circuit protection
- Input: DC 12-24V
- USB output: 5V / 2.4A * 2 (Smart IC)



Type-C FC CE RoHS

USB FC CE RoHS

Specification C73B

Specification C73B1

- 2.4A USB + built-in type-c cable with QC3.0
- Input: DC 12-24V
- USB output: 5V / 2.4A (Smart IC)
- Type-C charging cable output: 3.6-6.5V / 3A, 6.5-9V / 2A, 9-12V / 1.5A (18W max)

- 2.4A USB + built-in 2 in 1(type-c and micro 5 pin USB port) cable
- Material: ABS+PC
- Input: DC 12-24V
- Output: 5V / 4.8A



USB FC CE RoHS

USB FC CE RoHS

Specification C73B2

Specification C73E

- 2.4A USB + built-in Iphone charging cable
- Material: ABS+PC
- Input: DC 12-24V
- Output: 5V / 4.8A

- 2.4A USB + built-in audio cable +bluetooth
- Material: ABS+PC
- Input: DC 12-24V
- USB output: 5V / 2.4A (Smart IC)
- Bluetooth version: V4.2



Specification C73F

Specification C80

- Inport: DC 12-24V
- QC3.0 output: 3.6-6.5V / 3A, 6.5-9V / 2A, 9-12V / 1.5A (18W max)

- Inport: DC 12-24V
- USB output: 5V / 3.1A (Smart IC, dual USB port shared 3.1A)



Specification C71

Specification C91

- Input: DC 12-24V
- USB output: 5V / 2.4A * 2 (Smart IC)

- Inport: DC 12-24V
- USB output: 5V / 2.4A * 2 , 1A * 2 (Smart IC)
- On/off switch



Specification C72

Specification C72A

- Inport: DC 12-24V
- USB output: 5V / 2.4A * 2(Smart IC)
- With voltage screen display

- Inport: DC 12-24V
- USB output: 5V / 2.4A * 2 (Smart IC)

Bluetooth FM Transmitter



Specification B5

- Bluetooth function+ TF Card+Aux Cable+ voltage Display+hands free calling+shutdown +3.1A Dual USB port+U disk+1.44 inches LCD screen
- Bluetooth version:V4.2+EDR
- Input :DC12-24V;
- USB output: 3.1A(Dual USB shared) (smart IC)
- Effective bluetooth Range: 5 meters
- FM frequency: 87.5MHz - 108.0MHz
- Voltmeter function to control the quality of your car battery
- Advanced noise reduction system will guarantee quality crystal clear sound



Specification B4

- Bluetooth function+ TF Card+Aux Cable+hands free calling +U disk+1.44 inches LCD screen+ USB port
- Bluetooth version:V4.2+EDR
- Effective bluetooth Range: 5 meters
- FM frequency: 87.5MHz - 108.0MHz
- 3 different ways to play music in your car and more(Bluetooth, TF Card, Aux Cable)
- Advanced noise reduction system will guarantee quality crystal clear sound



Specification B31

- Input:DC 12-24V
- Output: DC 5V/2.4A
- Frequency:88.1-107.5KHZ
- Big LED display,show words on the screen
- Support 32G SD card
- Single USB port with smart IC charging
- Smart circuit and over-current protection
- One USB port support U flash
- Memory function when restart



USB
FC CE RoHS

Specification HC05Na

- Material: ABS+PC
- Input: DC 12-24V
- USB output: 5V /1.5A (Smart IC)
(option: 1.5A / 2.4A /3.1A)
- With LED indicator
- Support phones screen : 4.7-6.5 inch



Qualcomm Quick Charge 3.0
FC CE RoHS

Specification HC06YC

- Material: ABS+PC
- Input: DC 12-24V
- QC3.0 output: 3.6-6.5V / 3A, 6.5-9V / 2A,
9-12V /1.5A (18W max)
- With LED indicator
- Support phones screen :4.7-6.5 inch



USB
FC CE RoHS

Specification HC40YC

- Material: ABS+PC
- Input: DC 12-24V
- USB output: 5V /2.4A *2
With LED indicator and single socket
- Support phones screen :4.7-6.5 inch



2USB
FC CE RoHS

Specification HC44K

- Material: ABS+PC
- Input: DC 12-24V
- USB output: 5V /2.4A *2 (option: 4.8A /2.1A)
- Support phones screen :4-6.3 inch



2USB
FC CE RoHS

Specification HC09H

- Material: ABS+PC
- Inport: DC 12-24V
- USB output: 5V /2.4 A * 2
- With LED indicator
- Support phones screen :up to 8 inch
- With strong magnets



2USB
FC CE RoHS

Specification HC84N

- Material: ABS+PC
- Input: DC 12-24V
- USB output: 5V /2.1 A (dual USB shared)
(option: 2.1A /3.1A)
- Support phones screen :3.5-5.5 inch



3USB
FC CE RoHS

Specification HC95Rb

- Material: ABS+PC
- Input: DC 12-24V
- USB output: 5V /2.4A +2.1A+1A (total 5.5A)
- Support phones screen :up to 8 inch



Type-C
FC CE RoHS

Specification HC99Wa

- Input: DC 12-24V
- USB output: 5V /3.1A (dual USB shared)
- Type-c output: 5V / 3A
- Support phones screen :4-6.3 inch

Suction Cup Extendable Arm Car Phone Holder



Specification

HC33Wa

- Material: ABS+PC
- Support phones screen : 4-6.3 inch
(Width:43-97mm)
- Single handed operation with release button on back of bracket
- Fully adjustable with 360 degree rotation for optimal viewing
- Telescopic Arm extends from 88 to 128mm
- Pivots on 180° arc for a variety of optimal positions
- Strong sticky gel suction cup easily adhere to windshield or most surfaces



Specification

HC33Na

- Material: ABS+PC
- Support phones screen : 4.7 - 6.5 inch
(Width:50-95mm)
- Telescopic Arm extends from 88 to 128mm
- Easy to use, single hand operation
- Fully adjustable with 360 degree rotation for optimal viewing
- Pivots on 180° arc for a variety of optimal positions
- Strong sticky gel suction cup easily adhere to windshield or most surfaces



Gravity Cradle Extendable Arm Dashboard/Windshield Holder



Specification

RoHS
HC33X

- Material: Aluminum alloy + ABS
- Easy to use, single hand operation
- Auto lock and release due to gravity linkage
- Fully adjustable with 360 degree rotation for optimal viewing
- Fit for 4.7-6.0 inches devices
- Cradle grip spread range: 60-85mm
- Telescopic Arm extends from 88 to 128mm
- Pivots on 180° arc for a variety of optimal positions
- Strong sticky gel suction cup easily adhere to windshield or most surfaces



RoHS

Specification

G72X

- Material: Aluminum alloy + ABS
- Easy to use, single hand operation
- Auto lock and release due to gravity linkage
- Fully adjustable with 360 degree rotation for optimal viewing
- Fit for 4.7-6.0 inches devices
- Cradle grip spread range: 60-85mm
- Telescopic Arm extends from 88 to 128mm
- Pivots on 180° arc for a variety of optimal positions
- Strong sticky gel suction cup easily adhere to windshield or most surfaces
- Press switch to install into car air vent clip



Suction Cup Car Phone Gooseneck Holder



RoHS

Specification HC24Na



- Material: ABS+PC
- 360 degree rotation
- Support phones screen : 4.7-6.5 inch
- Strong sticky gel suction cup easily adhere to windshield or most surfaces



RoHS

Specification HC24WA



- Material: ABS+PC
- 360 degree rotation
- Support phones screen : 4-6.3 inch
- Strong sticky gel suction cup easily adhere to windshield or most surfaces



RoHS

Specification HC24YC



- Material: ABS+PC
- 360 degree rotation
- Support phones screen : 4.7-6.5 inch (width:50-95mm)
- Gooseneck length:21CM
- Strong sticky gel suction cup easily adhere to windshield or most surfaces



Suction Cup Car Phone Mount



360°
Rotation



For Smart
Devices

RoHS

Specification HC30Na



- Material: ABS+PC
- 360 degree rotation
- Support phones screen : 4.7-6.5 inch (width:50-95mm)
- Strong sticky gel suction cup easily adhere to windshield or most surfaces



RoHS

Specification HC30Rb



- Material: ABS+PC
- 360 degree rotation
- Support phones screen : up to 8 inch
- With strong magnetic
- Strong sticky gel suction cup easily adhere to windshield or most surfaces




Suction Cup Car Phone Mount



RoHS

Specification HC22Na

- Material: ABS+PC
- 360 degree rotation
- Support phones screen : 4.7-6.5 inch (width:50-95mm)
- Strong sticky gel suction cup easily adhere to windshield or most surfaces

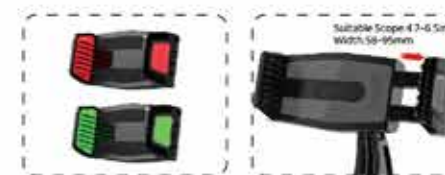

RoHS

Specification HC22YC


- Material: ABS+PC
- 360 degree rotation
- Support phones screen : 4.7-6.5 inch (width:50-95mm)
- Strong sticky gel suction cup easily adhere to windshield or most surfaces



Car Dashboard Magnetic Holder



Car Dashboard Magnetic Holder

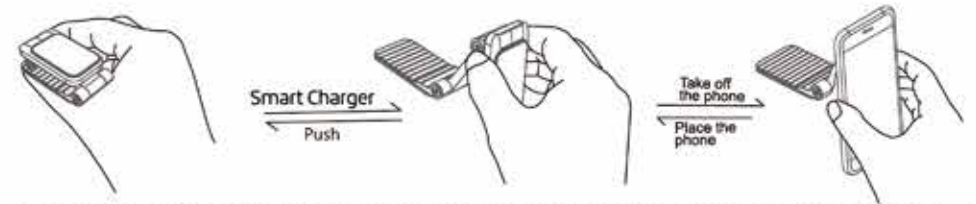

RoHS

Specification HC26

- High quality ABS+PC material
- Easy installation single hand operation
- Compact design, can be folded
- Strong magnets, hold your phone safely in car
- Support big screen phone, up to 8 inches
- Product dimensions: 74*40*24mm



RoHS

Specification G72Na

- Material: ABS+PC
- Support phones screen : 4.7-6.5 inch
- Press switch to install into car air vent clip



RoHS

Specification G71N

- Material: ABS+PC
- Support phones screen : 3.5-5.5 inch
- Rotate switch to install into car air vent clip



RoHS

Specification G20YC

- Material: ABS+PC
- 360 degree rotation
- Support phones screen : 4.7-6.5 inch



RoHS

Specification G16Na

- Material: ABS+PC
- 360 degree rotation
- Support phones screen : 4.7-6.5 inch



RoHS

Specification G70Na

- Material: ABS+PC
- 360 degree rotation
- Support phones screen : 4.7-6.5 inch



RoHS

Specification G72Rb

- Material: ABS+PC
- Support phones screen : up to 8 inch
- With strong magnets



RoHS

Specification G70H

- Material: ABS+PC
- Support phones screen : up to 8 inch
- With strong magnets



RoHS

Specification HX

- Material: ABS+PC
- Support phones screen : up to 8 inch
- With strong magnets



RoHS

Specification HC148

- Material: ABS+PC
- Support phones screen : up to 8 inch
- With strong magnets



RoHS

Specification HC147

- Material: ABS+PC
- Support phones screen : up to 8 inch
- With strong magnets
- With 3M double-sided adhesive sticker



RoHS

Specification A01

- Material: ABS+PC
- Support phones screen : up to 8 inch
- With strong magnets

Optional Holders

Remarks: Different bases can work with different holders



Yc Holder
Suitable Scope: 4.7~6.5in
Length: 140~200mm
Width: 50~95mm

KA Holder
Suitable Scope: 4~6.3in
Length: 113~168mm
Width: 44~90mm

K Holder
Suitable Scope: 4~6.3in
Length: 113~168mm
Width: 44~90mm

WX05 Holder
Suitable Scope: 3.5~6.5in
Width: 58~98mm



X/X8W Holder
Suitable Scope: 4.7~6.0in
Width: 60~85mm

W Holder
Suitable Scope: 4~6.3in
Width: 43~97mm

RB Holder
Suitable Scope: Up to 8 in
Length: 55.9mm
Width: 40.5mm

Na Holder
Suitable Scope: 4.7~6.5in
Width: 50~95mm



J Holder
Suitable Scope: 3.5~5.3 in
Width: 20~100mm


N Holder
Suitable Scope: 3.5~5.5in
Width: 55~80mm

C Holder
Suitable Scope: 3.5~5.3 in
Width: 58~85mm

H Holder
Suitable Scope: Up to 8 in
Length: 55.9mm
Width: 40.5mm

Optional Bases

Remarks: Different bases can work with different holders

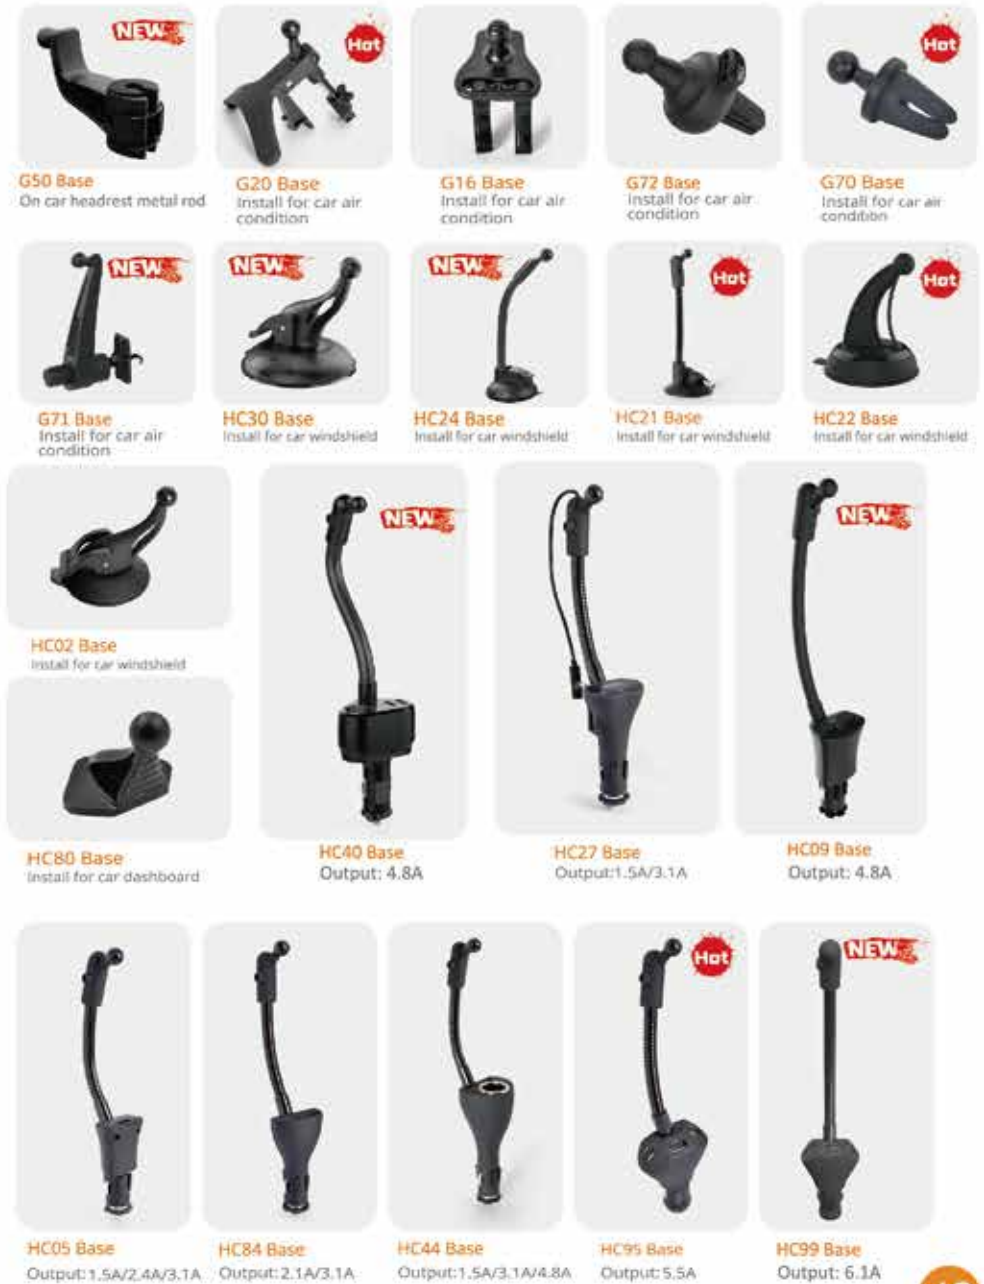



We are Professional team to work with.



CE Walmart ISO 9001 FCC BSCI

