



STANDARD COLORS



OTHER COLORS ON OPTION(MOQ 500pcs)



CHINA YONGKANG LINGHANG MACHINE POWER CO.,LTD.

ADD:No.110,South Yuegui Road, Xicheng Street, Yongkang,Zhejiang,P.R.C.
Tel:0086-579-8721 8059
Fax:0086-579-8721 8539
Mobile:0086-137 357 08900
WEB:www.aoweitool.com
E-Mail:aowei@aoweitool.com



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Aowei

Garden Tools & Accessories



CATALOGUE 2017



YongKang Linghang Machine Power Co.,Ltd. is located in the Hardware Capital City of Chin--Yong-Kang,Zhejiang province (two factories in YongKang & JinHua);it is one of the professional manufacturer of Chain Saws, Hedge Trimmers,Brush Cutters,Lawn Mowers,Ground Drills, Water pumps,Engines,etc,with the annual capacity of 500,000 sets,sold in more than 98 countries and area at home and abroad;

Linghang has always been acting as the spearhead of this field,with the idea of innovation:one new item comes out monthly with technological innovation;product quality control with all the staff participated in with institutional innovation;It adopts the advanced production line and excellent inspection equipment;besides, there are high-tech staff,experienced technicians,and superior accessory system to offer the customers first-class products and services;

The AOWEI People are always to be **Active,Original,Wise,Energetic,and ideal.**

Welcome customers at home and abroad come to Linghang,and create a bright future together!

Content

Lithium-ion

P03
40V Chainsaw

P04
40V String Trimmer

P05
40V Lawn Mower

4 Stroke Products

P06
Gasoline Chainsaw

P07-P10
Gasoline Brush Cutter

2 stroke Products

P11-36 Gasoline Brush Cutter

P37-38 Multi Functional Machine

P39 Accessories

P40-51 Gasoline Chainsaw

P52 Hedge Trimmer

P53-54 Ground Drill

P55-56 Gasoline Mini Tiller

P57 Gasoline Outboard Machine

P58 Water Pump

P59-60 Plum Harvester




Brief Introduction

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!




We can do more for a GREEN life...

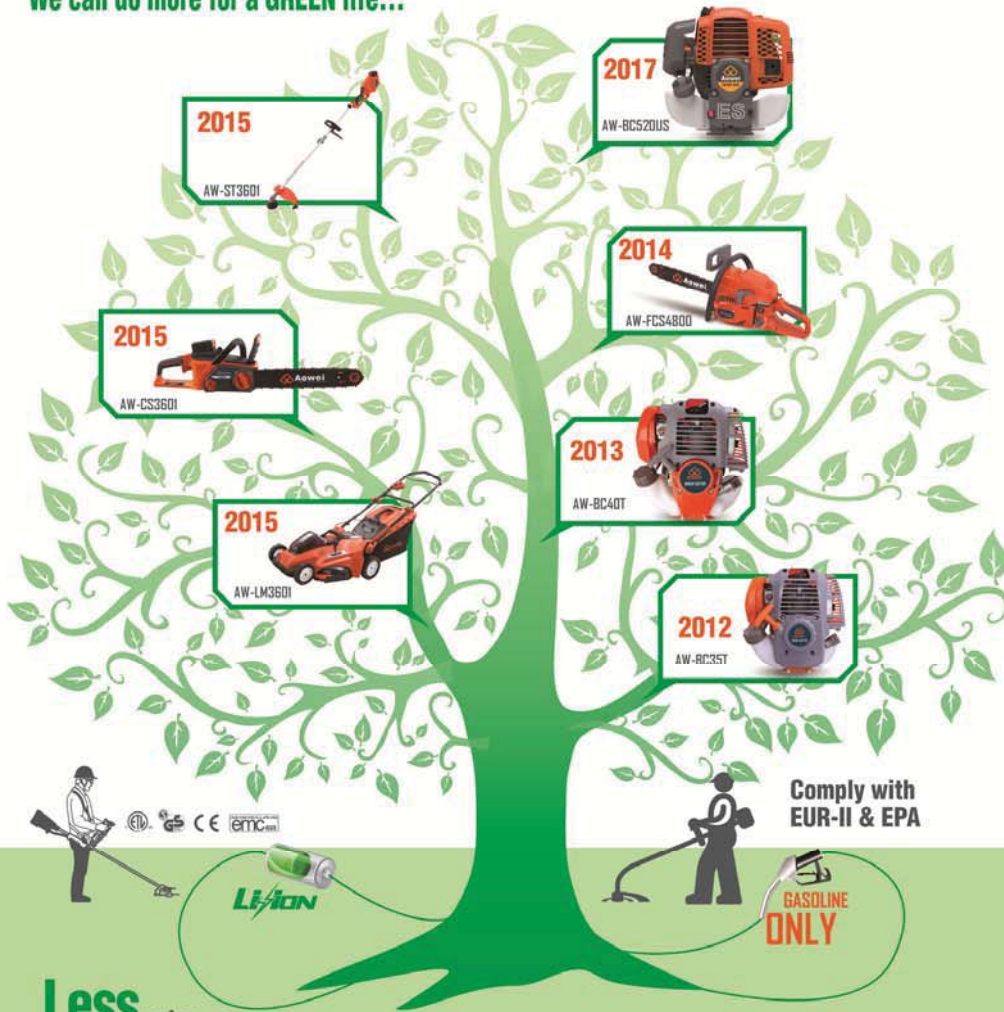

Less noise
Less weight
Less charge time
More faster
More comfortable

20% reduction in noise
50% reduction in fuel
65% reduction in nitric oxide (NOx)
85% reduction in unburned hydrocarbon (HC)

40V **L^{ION}** Tools

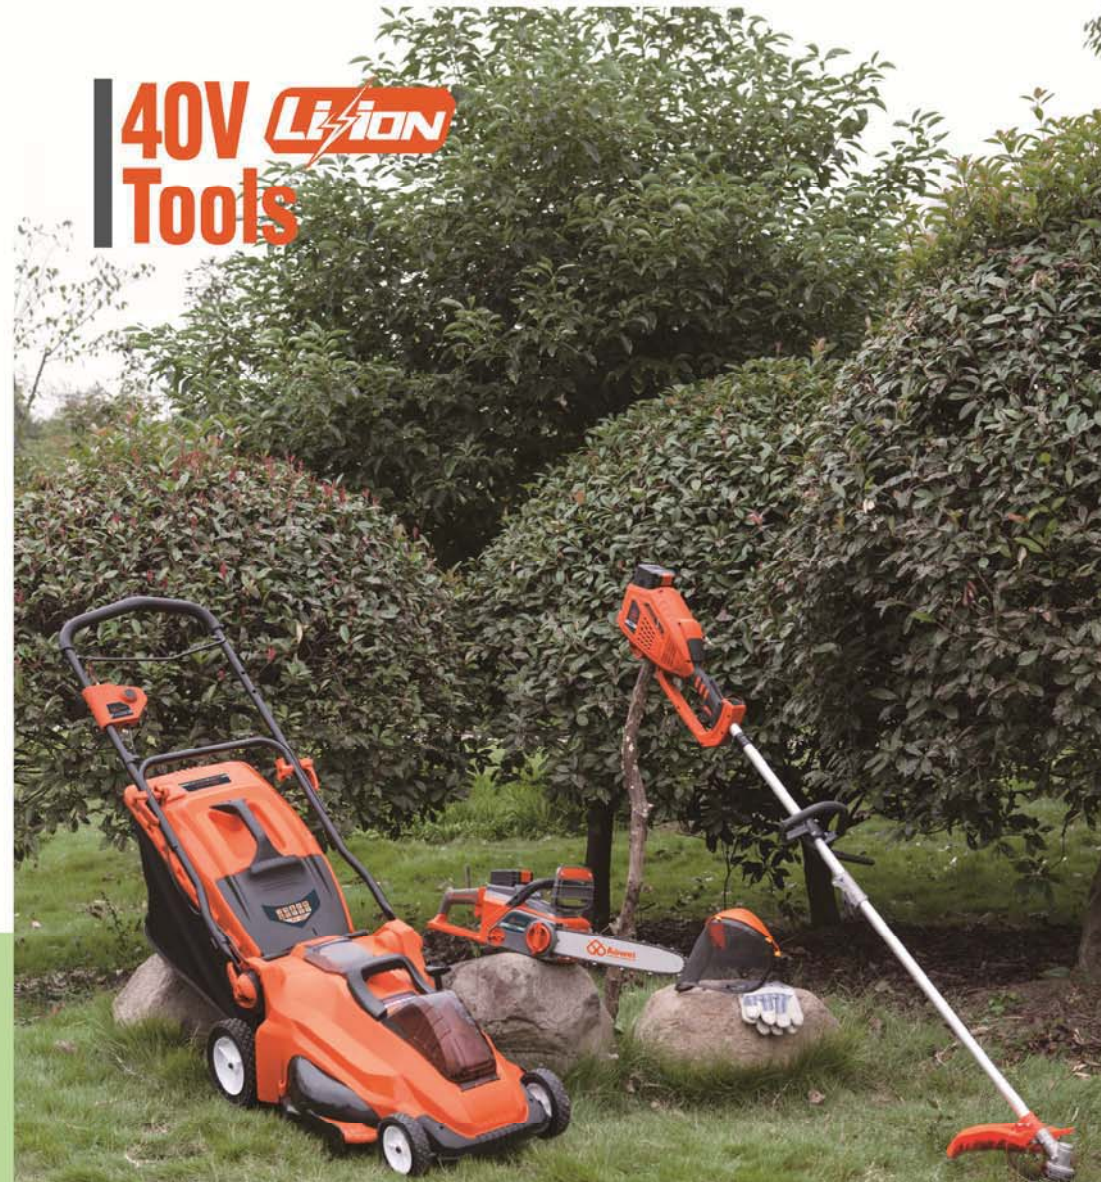

Lithium-ion 40V

Charger can be wall-mounted for convenience.

Diagnostic LEDs indicate when the charging process has finished.

On-board 'fuel indicator' shows remaining power-batteries can be recharged at any stage without negative memory effect.



40V **Li-ion** Chainsaw Li-series



Oil tank



Tool free system



Soft handle for comfortable use

Lithium-ion 40V



- Brushless motor
- Fast battery charger
- Front and rear triggers for safety start
- Well balance, all-around front handle for easy vertical and horizontal cutting
- Assembled with high quality aluminum gear box for long working life
- Wall mounted hook hole under rear handle for easy storage

Specifications	AW-CS3601
Power Source:	Lithium-ion Battery
Battery Voltage:	40V
Battery Capacity:	4Ah/5Ah
NO-load Speed:	5000rpm/min
Bar Length:	14" /350mm
Oil Tank:	150mL
Carton Size:	485*290*303mm
Weight:	5.6KGS

40V **Li-ion** String Trimmer Li-series



- Brushless motor
- Fast battery charger
- Rear mounted battery for more balance operation
- Split shaft for easy transportation and storage
- Working quietly with very low noise

Lithium-ion 40V



Specifications	AW-ST3601
Power Source:	Lithium-ion Battery
Battery Voltage:	40V
Battery Capacity:	4Ah/5Ah
NO-load Speed:	5500rpm/min 6000rpm/min
Blade:	260mm
Grass trimmer:	360mm
Net Weight:	6.6KGS



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

40V **Li-ion** Lawn Mower Li-series



Lithium-ion 40V




- Brushless motor
- Fast battery charger
- Central height adjustment with 5 position settings
- Transparent battery cover
- Ergonomic operation thanks to wrap-around full width metal trigger and foldable handle

Specifications

Power Source:
Rated Power:
Battery Voltage:
Battery Capacity:
No-Load Speed:
Cutting Width:
Net Weight:

AW-LM3601

Lithium-ion Battery
800W
40V
4Ah/5Ah
3600rpm/min
460mm
19.8kgs



55L

Gasoline Chainsaw

1ST **STROKE**

- Electronic speed limit system for more durable use
- Oil cap key system to ensure enough oil in the machine.
- Fuel view window for easy fuel refilling
- Combined wrench
- Soft handle for comfortable use
- Super easy starter

Engine Type:air-cooled,four-stroke,single cylinder
Cylinder Diameter:44mm
Max Recommended Engine speed:11,500r/min
Engine Power:1.5kW/2.04HP/8500rpm
Engine Displacement:47.1cc
Fuel Tank Capacity:550ml
Oil Tank Capacity:260ml
Guide Bar Size:16"/18"
N.W.:5.1kgs

AW-FCS4800



Super-Start **FUEL PRIMER** **C.D.I. Ignition**



Fuel primer for easy to start



Fuel view window



Combined wrench



Soft handle for comfortable use

SAY GOODBYE TO MIXED FUEL !



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Gasoline Brush Cutter



NEW DESIGN MODELS



Gasoline Brush Cutter




Split type cylinder for easy maintenance
Comfortable sound while working
Anti-vibration handle holder

	30mm Shaft	30mm Engine	30mm	30mm
	165x10x11cm	30x23x33cm	105x29x26.8cm	112.5x25.5x26.5x9.5cm
20GP	700	600	300	
40GP	1400	1240	620	
40HQ	1680	1450	840	

BC35G BC35D BC35T



Specifications	AW-BC35G	AW-BC35D 	Specifications	AW-BC35T
Engine Model:	1E139FG	1E139FD	Engine Model:	1E139FB
Cylinder Diameter:	39mm	39mm	Cylinder Diameter:	39mm
Engine Power:	0.8kW/1.09HP/6500r/min	0.8kW/1.09HP/6500r/min	Engine Power:	0.8kW/1.09HP/6500r/min
Engine Displacement:	31CC	31CC	Engine Displacement:	31CC
Idling Speed:	2800-3200r/min	2800-3200r/min	Idling Speed:	2800-3200r/min
Fuel Tank Capacity:	650ml	650ml	Fuel Tank Capacity:	650ml
Oil Tank Capacity:	70ml	70ml	Oil Tank Capacity:	70ml
Pipe Diameter:	26mm/28mm	26mm/28mm	Pipe Diameter:	26mm/28mm
Carrying Type:	Side-attached	Side-attached	Carrying Type:	Side-attached
N.W.:	7.6KGS	7.6KGS	N.W.:	7.6KGS



AWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



AWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Gasoline Brush Cutter 4STROKE




NEW



	Shaft	Engine	Shaft	Engine
20GP	165x10x11cm	30x2x33cm	105x26x26/8cm	182.5x25.5x26.5/9.5cm
40GP	700	600	1240	620
40HQ	1400	1450	840	

BC40TB BC40T



Specifications

Engine Model:
Cylinder Diameter:
Engine Power:
Engine Displacement:
Idling Speed:
Fuel Tank Capacity:
Oil Tank Capacity:
Pipe Diameter:
Carrying Type:
N.W.:

AW-BC40TB

1E140FB
40mm
1.2kW/1.63Hp/7000r/min
38.9CC
2800-3200r/min
650ml
120ml
26mm/28mm
Side-attached
7.8KGS

Gasoline Brush Cutter 4STROKE



Split type cylinder for easy maintenance
Comfortable sound while working
Anti-vibration handle holder
Strong safety guard



Specifications

Engine Model:
Cylinder Diameter:
Engine Power:
Engine Displacement:
Idling Speed:
Fuel Tank Capacity:
Oil Tank Capacity:
Pipe Diameter:
Carrying Type:
N.W.:

AW-BC40T

1E140FB
40mm
1.3kW/1.77Hp/7000r/min
38.9CC
2800-3200r/min
650ml
120ml
26mm/28mm
Side-attached
7.8KGS

CE EURO-II



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Electric Start



Electric Start



Electric Start
ES120

ES120

Battery capacity: 2200MA/H
Starting per charge: 120
Charging time: 3H
Battery: Lithium-ion
Start switch: MOSFET
Extra weight: 650g


Electric Start
ES90

ES90

Battery capacity: 1500MA/H
Starting per charge: 90
Charging time: 3H
Battery: Lithium-ion
Start switch: MOSFET
Extra weight: 650g

Gasoline Brush Cutter

TS
series

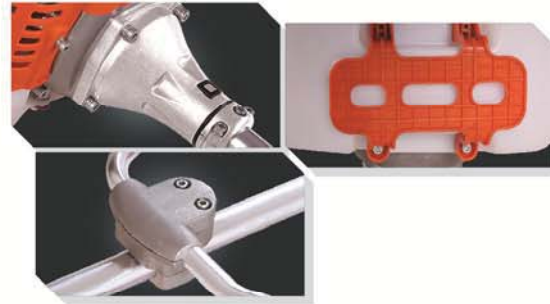

Unique design appearance
Low emission air filter
Reinforced plastic parts
Easy starter

	20GP	40GP	40HQ
Shaft	165x10x11cm	30x23x33cm	105x29x29.3/8cm
Engine	700	500	300
Assent	1400	1050	620
Assent	1680	1250	720

BC621 BC521



Specifications

Engine Model:
Cylinder Diameter:
Engine Power:
Engine Displacement:
Fuel Tank Capacity:
N.W.:

AW-BC621



1E48F-5TS
47.5mm
2.2kW/2.99Hp/7000r/min
62CC
1100ml
7.6KGS

AW-BC521



1E44F-5TS
44mm
1.4kW/1.90HP/6500r/min
51.7CC
1100ml
7.6KGS


CE EURO-II

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Brush Cutter

TS
series

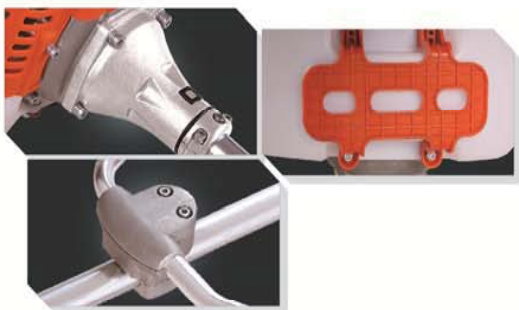

Unique design appearance
Low emission air filter
High quality parts
Reinforced plastic parts
Easy starter

	Shaft	Engine	Weight	Weight
	165x10x11cm 30x3x33cm	105x28x29.3x6cm	184x27.5x28.9.5cm	
20GP	700	500	300	
40GP	1400	1050	620	
40HQ	1680	1250	720	

BC431 BC331



Gasoline Brush Cutter

TS
series



Unique design appearance
Low emission air filter
High quality parts
Reinforced plastic parts

	Shaft	Engine	Weight	Weight
	165x10x11cm 30x3x29.5cm	105x28x29.8cm	182.5x25.5x26.5x9.5cm	
20GP	700	600	300	
40GP	1480	1240	620	
40HQ	1730	1450	840	

BC261



Specifications	AW-BC431	AW-BC331	Specifications	AW-BC261
Engine Model:	1E40F-5TS	1E36F-2TS	Engine Model:	1E134FTS
Cylinder Diameter:	40mm	36mm	Cylinder Diameter:	34mm
Engine Power:	1.25kW/1.70HP/6500r/min	0.9kW/1.22HP/6500r/min	Engine Power:	0.75kW/1.02HP/7500r/min
Engine Displacement:	42.7CC	32.6CC	Engine Displacement:	25.4CC
Fuel Tank Capacity:	1100ml	900ml	Fuel Tank Capacity:	700ml
N.W.:	7.6KGS	6.5KGS	N.W.:	5.8KGS




AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Gasoline Brush Cutter

KS
series

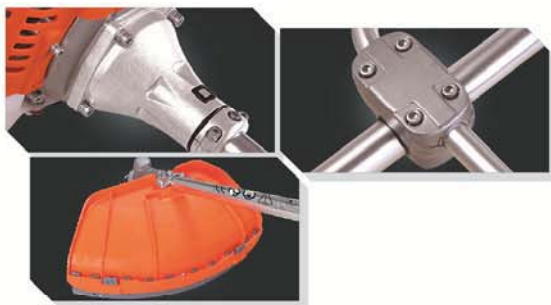

Unique design appearance
Low emission air filter
High quality parts
Reinforced plastic parts
Easy starter

	36mm Shaft 115x10x11cm 30x2x33cm	40mm Shaft 105x29x29.3/8cm	40mm Shaft 184x27.5x29.5cm
20GP	700	500	300
40GP	1400	1050	620
40HQ	1680	1250	720

BC331K



NEW

Gasoline Brush Cutter

KS
series



Unique design appearance
Low emission air filter
High quality parts
Reinforced plastic parts

	36mm Shaft 115x10x11cm 30x2x33cm	40mm Shaft 105x29x29.3/8cm	40mm Shaft 184x27.5x29.5cm
20GP	700	500	300
40GP	1400	1050	620
40HQ	1680	1250	720

BC620K BC520K BC430K



NEW

Specifications	AW-BC331K	AW-BC430K	AW-BC520K	AW-BC620K
Engine Model:	1E36F-2KS	1E40F-5KS	1E44F-5KS	1E48F-5KS
Cylinder Diameter:	36mm	40mm	44mm	47.5mm
Engine Power:	0.9kW/1.22HP/6500r/min	1.25kW/1.70HP/6500r/min	1.4kW/1.9HP/7000r/min	2.2kW/2.99HP/7000r/min
Engine Displacement:	32.6CC	42.7CC	51.7CC	62CC
Fuel Tank Capacity:	900ml	1100ml	1100ml	1100ml
N.W.:	6.5KGS	7.6KGS	7.6KGS	7.6KGS
	CE EURO-II	CE EURO-II	CE EURO-II	CE EURO-II



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Brush Cutter

US
series



NEW

	165x10x11cm	30x23x33cm	105x28x29.3/8cm	194x27.5x29.5cm
20GP	700	500	300	
40GP	1400	1050	620	
40HQ	1680	1250	720	

BC331U



Gasoline Brush Cutter

US
series

Combined clutch ass'y & fan cover
Improved concentricity
Stream line design
Easy starter

	165x10x11cm	30x23x33cm	105x28x29.3/8cm	194x27.5x29.5cm
20GP	700	500	300	
40GP	1400	1050	620	
40HQ	1680	1250	720	

BC621U BC521U BC431U



NEW

Specifications	AW-BC331U	AW-BC431U	AW-BC521U	AW-BC621U
Engine Model:	1E36F-2US	1E40F-5US	1E44F-5US	1E48F-5US
Cylinder Diameter:	36mm	40mm	44mm	47.5mm
Engine Power:	0.9kW/1.22HP/6500r/min	1.25kW/1.70HP/6500r/min	1.4kW/1.9HP/7000r/min	2.2kW/2.99HP/7000r/min
Engine Displacement:	32.6CC	42.7CC	51.7CC	62CC
Fuel Tank Capacity:	900ml	1100ml	1100ml	1100ml
N.W.:	6.5KGS	7.6KGS	7.6KGS	7.6KGS
	CE EURO-II	CE EURO-II	CE EURO-II	CE EURO-II



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!




Gasoline Brush Cutter

Our brush cutters are fitted with engines of high performance to offer great torque even at low RPM. The "tap" & go" head provides automatic line. A self-lubricating system protects the transmission and reduces vibrations for improved operator comfort. Centrifugation type clutch, permits better control of the machine (at minimum revs. the tool does not rotate). Six oil bearings in the pipe ensure the drive shaft working under a good concentricity.



Gasoline Brush Cutter *Low Emission*

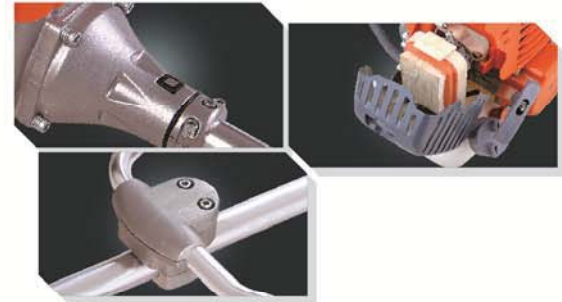

- Unique patented design appearance
- Low emission engine
- New airfilter
- Comfortable sound while working

	20mm Shaft	20mm Engine	20mm Shaft	20mm Engine
	165x10x11mm	30x23x33mm	115x28x29.38cm	184x27.5x28.9.5cm
20GP	700	500	300	
40GP	1400	1050	620	
40HP	1680	1250	720	

BCE520T BCE430T



Specifications	AW-BCE520T	AW-BCE430T
Engine Model:	1E44F-5T	1E40F-5T
Cylinder Diameter:	44mm	40mm
Engine Power:	1.3kW/1.77HP/7000r/min	1.1kW/1.50Hp/7000r/min
Engine Displacement:	51.7CC	42.7CC
Idling Speed:	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	1100ml	1100ml
Pipe Diameter:	26mm/28mm	26mm/28mm
Carrying Type:	Side-attached	Side-attached
N.W.:	7.6kgs	7.5kgs

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Brush Cutter

T
series



	165x10x11cm 30x23x33cm	105x28x29.3/8cm	184x27.5x29.9/5cm
20GP	700	500	300
40GP	1400	1050	620
40HQ	1680	1250	720

BC620T BC520T BC430T



Gasoline Brush Cutter

T
series

Unique patented design appearance
High performance
Tool free & efficient air filtration
Comfortable sound while working
Thick safety guard



	165x10x11cm 30x30x23.5cm	105x26x25.8cm	182x27x27.5/10cm
20GP	700	600	300
40GP	1480	1240	620
40HQ	1730	1450	840

BC330T BC260T

Specifications	AW-BC620T E-Start	AW-BC520T E-Start	AW-BC430T	AW-BC330T E-Start	AW-BC260T (T1 loop handle)
Engine Model:	1E48F-5T	1E44F-5T	1E40F-5T	1E36F-2T	1E34FT
Cylinder Diameter:	47.5mm	44mm	40mm	36mm	34mm
Engine Power:	2.2kW/2.99HP/7000r/min	1.4kW/1.90HP/6500r/min	1.25kW/1.70HP/6500r/min	0.9kW/1.22HP/6500r/min	0.75kW/1.02HP/7500r/min
Engine Displacement:	62CC	51.7CC	42.7CC	32.6CC	25.4CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	1100ml	1100ml	1100ml	900ml	700ml
Pipe Diameter:	26mm/28mm	26mm/28mm	26mm/28mm	26mm/28mm	26mm
Carrying Type:	Side-attached	Side-attached	Side-attached	Side-attached	Side-attached
N.W.:	7.6KGS	7.6KGS	7.6KGS	6.5KGS	5.8KGS



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Brush Cutter

B
series



	16x10x11cm 30x23x23cm	105x29x29.3/8cm	182x27x27.5/10cm
20GP	700	500	300
40GP	1400	1050	620
40HQ	1680	1250	720

BC620B BC520B BC430B



Gasoline Brush Cutter

B
series

Unique patented design appearance
Efficient air filtration
Anti-vibration handle stand
Comfortable sound while working
Metal fuel tank support
Strong safety guard
High performance



	16x10x11cm 30x23x23.5cm	105x29x29.8cm	182.5x25.5x26.5/9.5cm
20GP	700	600	300
40GP	1480	1240	620
40HQ	1730	1450	840

BC330B BC260B



Specifications	AW-BC620B E-Start	AW-BC520B E-Start	AW-BC430B E-Start	AW-BC330B E-Start	AW-BC260B (T1 loop handle)
Engine Model:	1E48F-5B	1E44F-5B	1E40F-5B	1E36F-2B	1E34FB
Cylinder Diameter:	47.5mm	44mm	40mm	36mm	34mm
Engine Power:	2.2kW/2.99HP/7000r/min	1.4kW/1.90HP/6500r/min	1.25kW/1.70HP/6500r/min	0.9kW/1.22HP/6500r/min	0.75kW/1.02HP/7500r/min
Engine Displacement:	62CC	51.7CC	42.7CC	32.6CC	25.4CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	1000ml	1000ml	1000ml	900ml	700ml
Pipe Diameter:	26mm/28mm	26mm/28mm	26mm/28mm	26mm/28mm	26mm
Carrying Type:	Side-attached	Side-attached	Side-attached	Side-attached	Side-attached
N.W.:	7.6KGS	7.6KGS	7.6KGS	6.5KGS	5.8KGS



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Brush Cutter K-series



Tool free & efficient air filtration
Metal fuel tank support
New clutch ass'y
Easy blade cover

	40mm Shaft 165x10x11cm	40mm Engine 302x333cm	40mm Shaft 105x28x29.3cm	40mm Engine 184x27.5x28.9.5cm
20GP	700	500	300	
40GP	1400	1050	620	
40HQ	1680	1250	720	

BC520K BC430K BC520N BC430N



Specifications	AW-BC520K	AW-BC430K	AW-BC330K
Engine Model:	1E44F-5K	1E40F-2K	1E36FK
Cylinder Diameter:	44mm	40mm	36mm
Engine Power:	1.4kW/1.90HP/6500r/min	1.25kW/1.70HP/6500r/min	0.9kW/1.22HP/6500r/min
Engine Displacement:	51.7CC	42.7CC	32.6CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	1000ml	900ml	700ml
Pipe Diameter:	26mm/28mm	26mm/28mm	26mm
Carrying Type:	Side-attached	Side-attached	Side-attached
N.W.:	7.6KGS	7.5KGS	6.5KGS

Gasoline Brush Cutter N-series



	40mm Shaft 165x10x11cm	40mm Engine 302x333cm	40mm Shaft 105x28x29.3cm	40mm Engine 182.5x25.5x26.5/9.5cm
20GP	700	600	300	
40GP	1480	1240	620	
40HQ	1730	1450	840	

BC260N BC330N BC260K BC330K



Specifications	AW-BC520N	AW-BC430N	AW-BC330N	AW-BC260N
Engine Model:	1E44F-5N	1E40F-5N	1E36F-2N	1E34FN
Cylinder Diameter:	44mm	40mm	36mm	34mm
Engine Power:	1.4kW/1.90HP/6500r/min	1.25kW/1.70HP/6500r/min	0.9kW/1.22HP/6500r/min	0.75kW/1.02HP/7500r/min
Engine Displacement:	51.7CC	42.7CC	32.6CC	25.4CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	1200ml	1200ml	850ml	700ml
Pipe Diameter:	26mm/28mm	26mm/28mm	26mm/28mm	26mm
Carrying Type:	Side-attached	Side-attached	Side-attached	Side-attached
N.W.:	7.6KGS	7.6KGS	6.5KGS	5.8KGS



AOWE-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



AOWE-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Gasoline Brush Cutter



Fitted with dependable engines producing high torque even at low RPM. The "tap & go" head provides automatic line advance without stopping. A self-lubricating liner protects the transmission and reduces vibrations for improved operator comfort. Equipped with a clutch, permitting better control of the machine, greater protection on the motor for perfect results even on long grass. Assembled with stronger plastic parts and high performance spare parts.

Gasoline Brush Cutter U-series



Combined clutch ass'y & fan cover
Improved concentricity
Stream line design
Easy starter

	40mm Stroke 161x10x11mm	30mm Stroke 303x90x5mm	40mm Stroke 105x26x25.3/10mm	40mm Stroke 164x27.5x26.9/5mm
20GP	650	500	300	
40GP	1320	1050	600	
40HQ	1580	1250	720	

BC520U BC430U



Specifications	AW-BC520U	AW-BC430U	AW-BC330U
Engine Model:	1E44F-5U	1E40F-5U	1E36F-2U
Cylinder Diameter:	44mm	40mm	36mm
Engine Power:	1.4kW/1.90HP/6500r/min	1.25kW/1.70HP/6500r/min	0.9kW/1.22HP/6500r/min
Engine Displacement:	51.7CC	42.7CC	32.6CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	1000ml	1000ml	1000ml
Pipe Diameter:	26mm/28mm	26mm/28mm	26mm/28mm
Carrying Type:	Side-attached	Side-attached	Side-attached
N.W.:	7.6KGS	7.5KGS	6.5KGS

AWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Brush Cutter

Basic-series

Basic series



FUEL PRIMER C.D.I. Ignition

Gasoline Brush Cutter

Basic-series

Basic series

High quality
Competitive price

	Shaft	Engine	Head
	165x10x11cm	30x23x33cm	105x29x29.3/8cm
20GP	700	500	300
40GP	1400	1050	620
40HQ	1680	1250	720

BC520 BC430

	Shaft	Engine	Head
	165x10x11cm	30x30x23.5cm	105x26x26/8cm
20GP	700	600	300
40GP	1480	1240	620
40HQ	1730	1450	840

BC330 BC260



Specifications	AW-BC520	AW-BC430	AW-BC330	AW-BC260 (T2 loop handle)
Engine Model:	1E44F-5	1E40F-5	1E36F-2	1E34F
Cylinder Diameter:	44mm	40mm	36mm	34mm
Engine Power:	1.4kW/1.90HP/6500r/min	1.25kW/1.70HP/6500r/min	0.9kW/1.22HP/6500r/min	0.75kW/1.02HP/7500r/min
Engine Displacement:	51.7CC	42.7CC	32.6CC	25.4CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	1200ml	1200ml	850ml	700ml
Pipe Diameter:	26mm/28mm	26mm/28mm	26mm/28mm	26mm
Carrying Type:	Side-attached	Side-attached	Side-attached	Side-attached
N.W.:	7.6KGS	7.6KGS	6.5KGS	5.8KGS



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Brush Cutter basic-series

Basic series

Popular 2 stroke models
High quality with competitive price
Rotary pipe on option
Float carburetor



	40mm Shaft	40mm Engine	40mm Engine	40mm Engine
	165x10x11cm	30x23x33cm	105x26x29.3/8cm	184x27.5x29.9/5cm
20GP	700		500	300
40GP	1400		1050	620
40HQ	1680		1250	720

BC411 BC328



Gasoline Brush Cutter basic-series

Basic series

Popular 4 stroke models
High quality with competitive price



	40mm Shaft	40mm Engine	40mm Engine	40mm Engine
	165x10x11cm	30x23x33cm	105x26x29.3/8cm	184x27.5x29.9/5cm
20GP	700		600	300
40GP	1400		1240	620
40HQ	1680		1450	720

BC139 BC356X



Specifications	AW-BC411	AW-BC328	AW-BC139	AW-BC356X
Engine Model:	1E40F-6	1E36F	139FA	GX35
Cylinder Diameter:	40mm	36mm	39mm	40mm
Engine Power:	1.45kW/1.97Hp/7500r/min	0.81kW/1.10Hp/6000r/min	0.7kW/0.95Hp/6500r/min	1.0kW/1.36Hp/6500r/min
Engine Displacement:	40.2CC	30.5CC	31CC	37.7CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	950ml	850ml	700ml	650ml
Pipe Diameter:	26mm/28mm	26mm/28mm	26mm/28mm	26mm/28mm
Carrying Type:	Side-attached	Side-attached	Side-attached	Side-attached
N.W.:	7.8KGS	7.0KGS	7.6KGS	7.6KGS



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Brush Cutter

Heavy duty(H)-series

Heavy
Duty
series



Ideal design for professional use
10mm square driving shaft
6 bearing cushions
Φ32mm*2mm thickness pipe
Rotary or fixed adjustable pipe for different purpose
Double bearing clutch ass'y
Big gear case ass'y



	Shaft	Engine	Ass'y	Ass'y
	106.5x12cm 30x30x25.5cm	105.28x29.3.8cm	114x27.5x28.7.5cm	
20GP	620	500	300	
40GP	1400	1050	620	
40HQ	1550	1250	720	

BC621H BC620TH BC620BH BC520TH BC520BH



Specifications	AW-BC621H	AW-BC620TH	AW-BC620BH	AW-BC520TH	AW-BC520BH
Engine Model:	1E48F-5TS	1E48F-5T	1E48F-5B	1E44F-5T	1E44F-5B
Cylinder Diameter:	47.5mm	47.5mm	47.5mm	44mm	44mm
Engine Power:	2.2kW/2.99Hp/ 7000r/min	2.2kW/2.99Hp/ 7000r/min	2.2kW/2.99Hp/ 7000r/min	1.4kW/1.90Hp/ 6500r/min	1.4kW/1.90Hp/ 6500r/min
Engine Displacement:	62CC	62CC	62CC	51.7CC	51.7CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	1100ml	1100ml	1100ml	1100ml	1100ml
Pipe Diameter:	32mm	32mm	32mm	32mm	32mm
Drive Shaft:	10mm	10mm	10mm	10mm	10mm
Carrying Type:	Side-attached	Side-attached	Side-attached	Side-attached	Side-attached
N.W.:	9.8KGS	9.8KGS	9.8KGS	9.6KGS	9.6KGS



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Gasoline Brush Cutter

30mm Pipe-series

30
series

Ideal design for professional use
8mm square driving shaft
6 pcs needle bearing inside
Φ30mm pipe
Anti-vibration operation handle
Tool free gear case



	Ass'y
	114x27.5x28.9.5cm
20GP	300
40GP	620
40HQ	720

BC43130



Specifications	AW-BC43130
Engine Model:	1E40F-5TS
Cylinder Diameter:	40mm
Engine Power:	1.25kW/1.70HP/6500r/min
Engine Displacement:	42.7CC
Fuel Tank Capacity:	1100ml
N.W.:	9.8KGS

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!





Brush Cutter Back Pack(F)-series



Perfect choice in difficult terrains(hills... etc)
Back pack design for maximum comfortable operation



Specifications	52CC Engine	43CC Engine	4 Stroke engine	
Engine Model:	1E44F-5	1E40F-5	1E139FB	1E140FB
Cylinder Diameter:	44mm	40mm	39mm	40mm
Engine Power:	1.4kW/1.90HP/6500r/min	1.25kW/1.70HP/6500r/min	0.8kW/1.09HP	1.2kW/1.63Hp
Engine Displacement:	51.7CC	42.7CC	31CC	38.9CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min	
Fuel Tank Capacity:	1000ml	1000ml	700ml	
Pipe Diameter:	26mm	26mm	26mm	
Carrying Type:	Back pack	Back pack	Back pack	
Pipe Length:	1330mm	1330mm	1330mm	

* Remark: suitable for

BC35TF	BC40TF	BC35TF-3	BC40TF-3
BC521F	BC520BF	BC520F-2	BC521F-3
BC431F	BC430BF	BC430F-2	BC431F-3

AOWE-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!





Multi Functional Machine

An ideal assistant of landscaper with the most cost-effective, Meet all requirements of your garden work.



Hook for rest



Multi Functional Machine



	133x26x22cm	105x26x26.8cm
20GP	370	600
40GP	780	1250
40HQ	9100	1450

CSG260T

	132.5x27.5x24cm	105x26x29.3x6cm
20GP	310	500
40GP	650	1050
40HQ	760	1250

CSG430T CSG330T



New connector, durable and easy to use



Specifications	AW-CSG430T <i>E-Start</i>	AW-CSG330T <i>E-Start</i>	AW-CSG260T
Engine Model:	1E40F-5T	1E36F-2T	1E34FT
Cylinder Diameter:	40mm	36mm	34mm
Engine Power:	1.25kW/1.70HP/6500r/min	0.9kW/1.22HP/6500r/min	0.75kW/1.02HP/7500r/min
Engine Displacement:	42.7CC	32.6CC	25.4CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	1100ml	900ml	700ml
Pipe Diameter:	26mm/28mm	26mm/28mm	26mm
Carrying Type:	Side-attached	Side-attached	Side-attached
N.W.:	7.6KGS	6.5KGS	5.8KGS

* Remark: suitable for all brush cutter

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Accessories



CODE NO. B1 B2 B3 B4 B5 B6 B7 B8 B11



CODE NO. L1 L2 L3 L4 L5 L6




CODE NO. L7 L8 L9 L10 L11 L12 L13



CODE NO. S1 S2 S3 S4 S5 S6



CODE NO. D1 D2 D3 D4 D5 K2

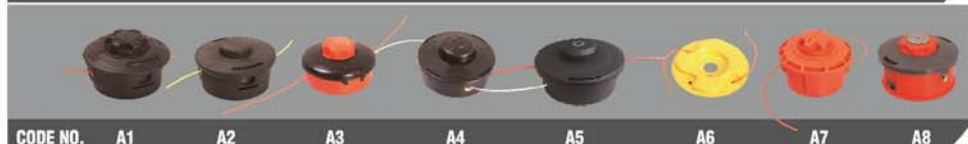

CODE NO. A1 A2 A3 A4 A5 A6 A7 A8



CODE NO. A9 A10 A11 A12 E1 T1 T2 T3



CODE NO. C1 C2 C3 C4 C5 C6 C7 C8 C9

Gasoline Chainsaw



Features:

- Easy starter-convenient and labor-saving start
- Gravity casting cylinder-higher power
- Double-layer high quality air filter-tool free disassembly
- Automatic lubrication chain
- Auto choke
- Dual vent mufflers-enhance power output and reduce the temperature of the machine
- Less than 0.12s internal brake system-to ensure safety
- Solid structure, reliable for use
- High power/weight ratio
- Good damping effect-rubber column damping

Gasoline Chainsaw T-series



Dual vent muffler



Soft handle for comfortable use



Bumper



Decompression valve for easy start

New design robust engine for heavy duty task

	47.5x26.5x33cm Color box	55x49x36.5cm Carbon box
20GP	580	
40GP	1190	
40HQ	1390	

CS72T CS65T



Gasoline Chainsaw T-series



Fuel view window for easy operation



Combined wrench



Soft handle for comfortable use



Dual vent muffler

	49.5x25.5x29.5cm Color box	34x60x32cm Carbon box	48x27x28.11cm Color box	49.5x28.5x43.5cm Carbon box
20GP	650		900	
40GP	1350		1900	
40HQ	1580		2200	

CS58T CS52T CS46T



Specifications	AW-CS72T	AW-CS65T	Specifications	AW-CS58T	AW-CS52T	AW-CS46T
Cylinder Diameter:	50mm	48mm	Cylinder Diameter:	45.2mm	45mm	43mm
Max Recommended Engine speed:	12,500r/min	13,000r/min	Max Recommended Engine speed:	12,500r/min	12,500r/min	12,500r/min
Engine Power:	3.9kW/5.30HP/9000r/min	3.2kW/4.35HP/9000r/min	Engine Power:	2.2kW/2.99HP/8500r/min	1.9kW/2.58HP/8500r/min	1.8kW/2.45HP/8500r/min
Engine Displacement:	70.7CC	65.1CC	Engine Displacement:	55CC	49.3CC	45CC
Idling Speed:	2800-3200r/min	2800-3200r/min	Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	700ml	770ml	Fuel Tank Capacity:	550ml	550ml	550ml
Oil Tank Capacity:	400ml	400ml	Oil Tank Capacity:	260ml	260ml	260ml
Guide Bar Size:	20" -28"	20" -28"	Guide Bar Size:	18" /20" /22"	18" /20" /22"	18" /20"



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Chainsaw T-series

T
series



Efficient air filtration

High quality muffler

Soft handle for comfortable use

	Color box 41x25.5x27cm	Carton box 53x42x29cm	Color box 49x27x28/11cm	Carton box 49.5x28x43.5cm
20GP	800		900	
40GP	1700		1800	
40HQ	2020		2220	

CS41T CS38T



Specifications	AW-CS41T	AW-CS38T
Cylinder Diameter:	40.5mm	38mm
Max Recommended Engine speed:	11,500r/min	11,500r/min
Engine Power:	1.35kW/1.84HP/8500r/min	1.2kW/1.63HP/8500r/min
Engine Displacement:	40.1CC	37.2CC
Idling Speed:	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	380ml	380ml
Oil Tank Capacity:	200ml	200ml
Guide Bar Size:	16"	16"

Gasoline Chainsaw 1/2-series

1/2
series



Fuel view window for easy operation

Combined wrench

Soft handle for comfortable use



AW-CS2580/CS2520/CS2460

AW-CS1580/CS1520/CS1460

	Color box 49.5x25.5x29.5cm	Carton box 54x50x32cm	Color box 48x27x28/11cm	Carton box 49.5x28.5x43.5cm
20GP	650		900	
40GP	1350		1900	
40HQ	1580		2200	

CS1580/CS2580 CS1520/CS2520 CS1460/CS2460

Specifications	AW-CS1580 CS2580	AW-CS1520 CS2520	AW-CS1460 CS2460
Cylinder Diameter:	45.2mm	45mm	43mm
Max Recommended Engine speed:	12,500r/min	12,500r/min	12,500r/min
Engine Power:	2.2kW/2.99HP/8500r/min	1.9kW/2.58HP/8500r/min	1.8kW/2.45HP/8500r/min
Engine Displacement:	55CC	49.3CC	45CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	550ml	550ml	550ml
Oil Tank Capacity:	260ml	260ml	260ml
Guide Bar Size:	18" /20" /22"	18" /20" /22"	18" /20"



AOWE-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



AOWE-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Gasoline Chainsaw 59-series



59
series



Fuel view window for easy operation



Soft handle for comfortable use



New paper airfilter cap design & locker



Paper air filter

**New Appearance
New Function**



Gasoline Chainsaw A-series



A
series



Fuel view window for easy operation



Soft handle for comfortable use



New air filter with locker design



Easy on-off switch

**New Appearance
New Function**



	43.5x25.5x29.5cm 54x50x22cm	49x27x28.11cm	40.5x28.5x43.5cm
20GP	650	960	
40GP	1350	1900	
40HQ	1580	2250	

CS59 CS58A CS52A CS45A

Specifications	AW-CS59	Specifications	AW-CS58A	AW-CS52A	AW-CS45A
Cylinder Diameter:	45.2mm	Cylinder Diameter:	45.2mm	45mm	43mm
Max Recommended Engine speed:	12,500r/min	Max Recommended Engine speed:	12,500r/min	12,500r/min	12,500r/min
Engine Power:	2.8kW/3.80HP/8500r/min	Engine Power:	2.2kW/2.99HP/8500r/min	1.9kW/2.58HP/8500r/min	1.8kW/2.45HP/8500r/min
Engine Displacement:	56.3CC	Engine Displacement:	55CC	49.3CC	45CC
Idle Speed:	2800-3200r/min	Idle Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	550ml	Fuel Tank Capacity:	550ml	550ml	550ml
Oil Tank Capacity:	260ml	Oil Tank Capacity:	260ml	260ml	260ml
Guide Bar Size:	18" /20" /22"	Guide Bar Size:	18" /20" /22"	18" /20" /22"	18" /20"



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Chainsaw B-series

B
series



Fuel view window for easy operation



Soft handle for comfortable use



New air filter with locker design



Easy on-off switch



Gasoline Chainsaw C-series

C
series



Fuel view window for easy operation



Dual vent muffler

**New Appearance
New Function
Full comply with EURO-2**



	49.5x25.5x29.5cm 40mm Color box	54x30x32cm 40mm Carton box	48x27x28.11cm 40mm Color box	48.5x28.5x43.5cm 40mm Carton box
20GP	650		960	
40GP	1350		1900	
40HQ	1580		2250	

CS58B CS52B CS45B CS58C CS52C CS45C



Specifications	AW-CS58B	AW-CS52B	AW-CS45B	Specifications	AW-CS58C	AW-CS52C	AW-CS45C
Cylinder Diameter:	45.2mm	45mm	43mm	Cylinder Diameter:	45.2mm	45mm	43mm
Max Recommended Engine speed:	12,500r/min	12,500r/min	12,500r/min	Max Recommended Engine speed:	12,500r/min	12,500r/min	12,500r/min
Engine Power:	2.2kW/2.99HP/8500r/min	1.9kW/2.58HP/8500r/min	1.8kW/2.45HP/8500r/min	Engine Power:	2.2kW/2.99HP/8500r/min	1.9kW/2.58HP/8500r/min	1.8kW/2.45HP/8500r/min
Engine Displacement:	55CC	49.3CC	45CC	Engine Displacement:	55CC	49.3CC	45CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min	Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	550ml	550ml	550ml	Fuel Tank Capacity:	550ml	550ml	550ml
Oil Tank Capacity:	260ml	260ml	260ml	Oil Tank Capacity:	260ml	260ml	260ml
Guide Bar Size:	18" /20" /22"	18" /20" /22"	18" /20"	Guide Bar Size:	18" /20" /22"	18" /20" /22"	18" /20"



AOWEï-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

AOWEï-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Chainsaw Classic models

Classic series



Dual vent muffler



Bumper



Decompression valve for easy start

Robust engine for heavy duty task

	50mm Color box	50mm Carbon box
	47.5x26.5x33cm	50x49x36.5cm
20GP	580	
40GP	1190	
40HQ	1390	

CS372 CS365



Specifications	AW-CS372	AW-CS365
Cylinder Diameter:	50mm	48mm
Max Recommended Engine speed:	12,500r/min	13,000r/min
Engine Power:	3.9kW/5.30HP/9000r/min	3.2kW/4.35HP/9000r/min
Engine Displacement:	70.7CC	65.1CC
Idling Speed:	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	700ml	770ml
Oil Tank Capacity:	400ml	400ml
Guide Bar Size:	20" -28"	20" -28"



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Gasoline Chainsaw 7/8 series

7/8 series



Fuel primer easy to start



Fuel view window for easy operation



Slip-proof board



AW-CS7580/CS7520/CS7460

	50mm Color box	50mm Carbon box	48mm Color box	48mm Carbon box
	49.5x25.5x29.5cm	54x30x32cm	48x27x29.11cm	49.5x26.5x43.5cm
20GP	650		960	
40GP	1350		1900	
40HQ	1580		2250	

CS7580/CS8580 CS7520/CS8520 CS7460/CS8460

AW-CS8580/CS8520/CS8460

Specifications	AW-CS7580 CS8580	AW-CS7520 CS8520	AW-CS7460 CS8460
Cylinder Diameter:	45.2mm	45mm	43mm
Max Recommended Engine speed:	12,500r/min	12,500r/min	12,500r/min
Engine Power:	2.2kW/2.99HP/8500r/min	1.9kW/2.58HP/8500r/min	1.8kW/2.45HP/8500r/min
Engine Displacement:	55CC	49.3CC	45CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	550ml	550ml	550ml
Oil Tank Capacity:	260ml	260ml	260ml
Guide Bar Size:	18" /20" /22"	18" /20" /22"	18" /20"



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Chainsaw



Gasoline Hedge Trimmer



This lovely machine can be used for not only pruning and tree maintenance, but also carving with a carving bar.

TOP HANDLE TYPE



	41x25.5x27cm	33x42x29cm	48x27x28/11cm	49.5x28x43.5cm
20GP	800	900	900	900
40GP	1700	1800	1800	1800
40HQ	2020	2220	2220	2220

CS3800

Classic Models series

	32x25x25cm	52.5x34.5x27.5cm
20GP	1124	1124
40GP	2320	2320
40HQ	2730	2730

CS2500

Specifications	AW-CS3800	AW-CS2500
Cylinder Diameter:	38mm	34mm
Max Recommended Engine speed:	11,500r/min	12,500r/min
Engine Power:	1.2kW/1.63HP/8500r/min	0.9kW/1.22HP/9000r/min
Engine Displacement:	37.2CC	25.4CC
Idling Speed:	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	310ml	230ml
Oil Tank Capacity:	210ml	160ml
Guide Bar Size:	15" /16"	10" /12"



600mm dual scissor



750mm single scissor

	106x25x24cm	111.5x29x29.5cm
20GP	900	660
40GP	1820	1340
40HQ	2150	1600

HT600T HT600B HT750T HT750B HT132 HT132A HT132AN HT232

Specifications	AW-HT600T	AW-HT600B	AW-HT750T	AW-HT750B	AW-HT132 AW-HT132A AW-HT132AN	AW-HT232
Engine Model:	1E34FT	1E34FB	1E34FT	1E34FB	1E32F	1E32F
Cylinder Diameter:	34mm	34mm	34mm	34mm	32mm	34mm
Engine Power:	0.75kW/1.02HP/7500r/min	0.75kW/1.02HP/7500r/min	0.75kW/1.02HP/7500r/min	0.75kW/1.02HP/7500r/min	0.65kW/0.88HP/6500r/min	0.65kW/0.88HP/7500r/min
Engine Displacement:	25.4CC	25.4CC	25.4CC	25.4CC	22.5CC	22.5CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min	2600r/min	2800-3200r/min
Fuel Tank Capacity:	700ml	700ml	700ml	700ml	600ml	600ml
Blade Length:	600mm	600mm	750mm	750mm	750mm	600mm
Scissor Type:	Dual	Dual	Single	Single	Single	Dual



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!










AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Gasoline Ground Drill

If you want to dig a hole in ground or ice easily, this ideal product can help.


	60mm Engine
	43x33x32cm
20GP	600
40GP	1250
40HQ	1500
GD621 GD620T GD620B GD521 GD520T 520B 520K 406	

Accessories

Ice Drill	Extension	Ground Drill				
 replaceable blade						
150/200mm 3.2/4.2kgs	20/40/60cm length * De zylinder	100mm 2.2kgs	150mm 3.2kgs	200mm 4.2kgs	250mm 5.5kgs	300mm 8.2kgs
		* De zylinder 90/100cm length				



Gasoline Ground Drill

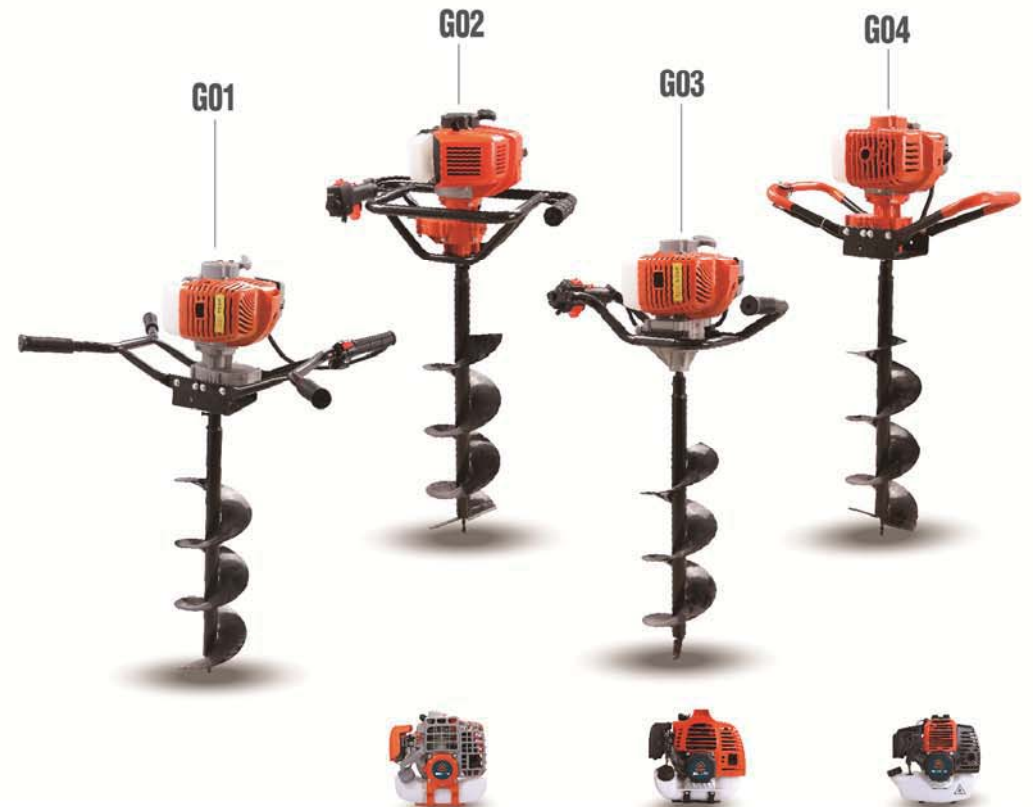

Specifications	AW-GD621	AW-GD620T	AW-GD620B	AW-GD521	AW-GD520T	AW-GD520B	AW-GD520K	AW-GD406
Engine Model:	1E48F-5TS	1E48F-5T	1E48F-5B	1E44F-5TS	1E44F-5T	1E44F-5B	1E44F-5K	1E44F-5
Cylinder Diameter:	47.5mm	47.5mm	47.5mm	44mm	44mm	44mm	44mm	44mm
Engine Power:	2.2kW/2.99HP/ 7000r/min	2.2kW/2.99HP/ 7000r/min	2.2kW/2.99HP/ 7000r/min	1.4kW/1.90HP/ 6500r/min	1.4kW/1.90HP/ 6500r/min	1.4kW/1.90HP/ 6500r/min	1.4kW/1.90HP/ 6500r/min	1.4kW/1.90HP/ 6500r/min
Engine Displacement:	62CC	62CC	62CC	51.7CC	51.7CC	51.7CC	51.7CC	51.7CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	1100ml	1100ml	1100ml	1100ml	1100ml	1100ml	1100ml	1100ml



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Mini Tiller

With the help of this small machine, you can find more funs in your garden.

	45x45x20.5cm
20GP	450
40GP	9200
40HQ	1080
MT520B MT621 MT620T MT620B MT520T MT521 MT520N	



Gasoline Mini Tiller

With the help of this small machine, you can find more funs in your garden.



Specifications	AW-MT621	AW-MT620T	AW-MT620B	AW-MT521	AW-MT520T	AW-MT520B	AW-MT520N
Engine Model:	1E48F-5	1E48F-5T	1E48F-5B	1E44F-5T	1E44F-5T	1E44F-5B	1E44F-5N
Cylinder Diameter:	47.5mm	47.5mm	47.5mm	44mm	44mm	44mm	44mm
Engine Power:	2.2kW/2.99HP/ 7000r/min	2.2kW/2.99HP/ 7000r/min	2.2kW/2.99HP/ 7000r/min	1.4kW/1.90HP/ 6500r/min	1.4kW/1.90HP/ 6500r/min	1.4kW/1.90HP/ 6500r/min	1.4kW/1.90HP/ 6500r/min
Engine Displacement:	62CC	62CC	62CC	51.7CC	51.7CC	51.7CC	51.7CC
Idling Speed:	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min	2800-3200r/min
Fuel Tank Capacity:	1200ml	1200ml	1200ml	1200ml	1200ml	1200ml	1200ml
Tilling Depth:	10cm	10cm	10cm	10cm	10cm	10cm	10cm
Tilling Breadth:	30cm	30cm	30cm	30cm	30cm	30cm	30cm
Blade Diameter:	22.5cm	22.5cm	22.5cm	22.5cm	22.5cm	22.5cm	22.5cm
Capacity:	3-4 acre/hr	3-4 acre/hr	3-4 acre/hr	3-4 acre/hr	3-4 acre/hr	3-4 acre/hr	3-4 acre/hr



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!



Gasoline Outboard Machine

A good partner for boating or fishing



	39mm Shaft	39mm Engine
	65.5x28x17cm 27.21x20cm	
20GP	500	
40GP	1050	
40HP	1240	
OBM620T OBM621 OBM620B		



Specifications	AW-OBM621	AW-OBM620T	AW-OBM620B
Cylinder Diameter:	47.5mm	47.5mm	47.5mm
Starting system:	Manual	Manual	Manual
Engine power:	1.8kW/2.5HP	1.8kW/2.5HP	1.8kW/2.5HP
Working speed:	5500-6500r/min	5500-6500r/min	5500-6500r/min
Engine displacement:	62cc	62cc	62cc
Fuel tank capacity:	1100ml	1100ml	1100ml
Propeller mark:	7-1/4*5-A(inch)	7-1/4*5-A(inch)	7-1/4*5-A(inch)
Fuel to oil ratio:	25:1	25:1	25:1
Gear ratio:	27/13	27/13	27/13
Overall length:	102.5cm	102.5cm	102.5cm
Overall width:	37cm	37cm	37cm
Overall height:	26.5cm	26.5cm	26.5cm



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Water Pump


A good partner for boating or fishing



Specifications	AW-QGZ-25	AW-QGZ-40
Engine Model:	139FB	IE44F-5B
Cylinder Diameter:	39mm	51.5CC
Engine power:	0.95KW/1.27HP/7600rpm	1.9KW/2.5HP/7600rpm
Engine displacement:	31CC	52CC
Outlet side :	25mm	40mm
Rate of flow:	8cbm/h	20cbm/h
Suction height :	8m	20m
Lift height:	30m	45m
Fuel capacity:	950ml	1000ml
Net weight:	10.6kg	10.6kg



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

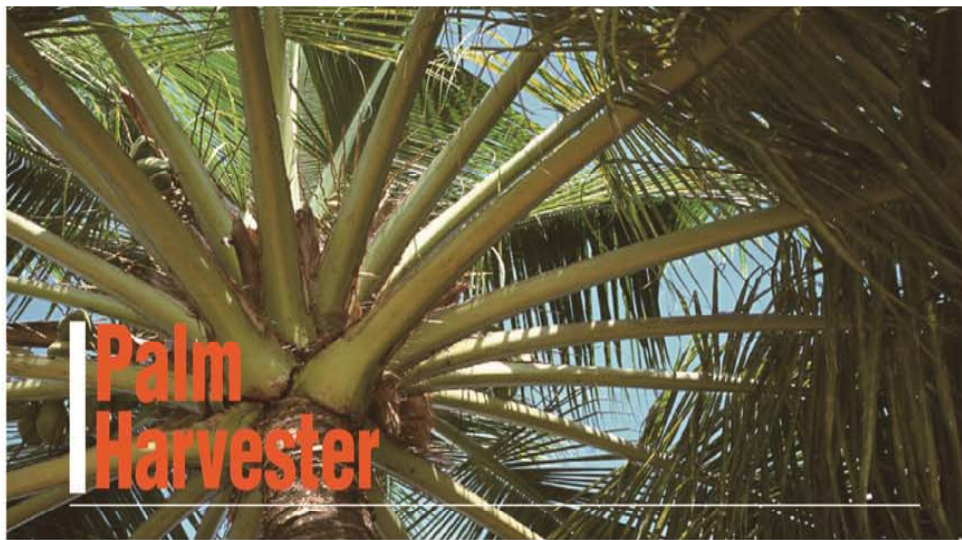

Palm Harvester



FUEL PRIMER C.D.I. Ignition



***Suitable Engine: 1E34F
139FB (4 stroke)**



AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

Palm Harvester

AXE TYPE HARVESTER
Low and middle palm tree



HOOK
Pull the palm fruit down



FAST CONNECTOR
Easy to extend the length for higher position cut



SICKLE TYPE HARVESTER
High position palm tree cut
With extension pole can reach max.2.5M

EXTENSION POLE

SUPER ALU. GEAR CASE
Heavy duty pinion gear for durability cutting performance
Low vibration design
increase operator's comfort



Specifications	AW-PH260	AW-PH35T
Engine Model:	1E34F	139FB
Cylinder Diameter:	34mm	39mm
Engine Power:	0.75kW/1.02HP/7500r/min	0.8kW/1.09HP/6500r/min
Engine Displacement:	25.4CC	31CC
Fuel Tank Capacity:	700ml	700ml
Oil Tank Capacity:		70ml

AOWEI-ALWAYS TO BE ACTIVE, ORIGINAL, WISE, ENERGETIC, AND IDEAL!

