

JIAXING SHENGWELL AUTO

Web: <http://www.yifano.com.cn>
shengwelljx@hotmail.com

Skype: jxshengwell

Email: auto@jxshengwell.com /

Facebook: [@355192877](https://www.facebook.com/355192877)@qq.com

Whats App: +8613967357905

M.b: 86-13967357905

Price list for Led Bar light- Single Row. Double Row. Three Row. Four Row. Epistar. CREE

| Item No | Picture | Description | Price | Packing |
|--|---------|---|---------|---|
| double Row led bar —Epistar : 36W;60W;72W.120W;180W.240W.300W. | | | | |
| SHL-B236 | | <ul style="list-style-type: none"> LED Power: 36W Operating Voltage: 10-30V DC Waterproof rate: IP 67 12pcs*3w high intensity Epistar LEDs Optional Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PC Mounting Bracket: Alu firm bracket Beam:12degree Spot/60degree flood/Combo 30000 hours above life time Dimensions : 7.5 inch | \$ 9.5 | PKG size: 330*180*150 mm QTY: 6pcs/ctn N.W: 2kg/pcs Ctn Size: 470*370*370 mm Gross weight: 13KG |
| SHL-B272 | | <ul style="list-style-type: none"> LED Power: 72W 24pcs*3w high intensity Epistar LEDs Dimensions : 13.5 inch | \$ 14.0 | PKG size: 490*180*150 mm QTY: 6pcs/ctn N.W: 3kg/pcs |
| SHL-B2120 | | <ul style="list-style-type: none"> LED Power: 120W 40pcs*3w high intensity Epistar LEDs Dimensions : 21.5 inch | \$ 16.0 | PKG size: 690*180*150 mm QTY: 4pcs/ctn |
| SHL-B2180 | | <ul style="list-style-type: none"> LED Power: 180W 60pcs*3w high intensity Epistar LEDs Dimensions:31.5 inch | \$ 24.0 | PKG size: 950*180*150 mm QTY: 4pcs/ctn |
| SHL-B2240 | | <ul style="list-style-type: none"> LED Power: 240W 80pcs*3w high intensity Epistar LEDs Dimensions:41.5 inch | \$ 32.0 | PKG size: 1200*180*150 mm QTY: 4pcs/ctn |
| SHL B2288 | | <ul style="list-style-type: none"> LED Power: 288W 80pcs*3w high intensity Epistar LEDs Dimensions:50inch | \$ 39.0 | |
| SHL-B2300 | | <ul style="list-style-type: none"> LED Power: 300W 100pcs*3w high intensity Epistar LEDs 51 inch | \$ 40.0 | PKG size: 1400*150*140 mm QTY: 4pcs/ctn N.W: 8kg/pcs |
| double Row led bar —Epistar : 36W;72W;120W;180W;240W; 288W;300W | | | | |
| SHL BE236 | | <ul style="list-style-type: none"> LED Power: 36W Operating Voltage: 10-30V DC Waterproof rate: IP 67 12pcs*3w high intensity Epistar LEDs Optional Color: Black/White Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Beam:8degree Spot/60degree flood/Combo 30000 hours above life time Dimensions : 7.5 inch | \$ 9.5 | PKG size: 330*180*150 mm QTY: 6pcs/ctn N.W: 2kg/pcs Ctn Size: 470*370*370 mm Gross weight: 13KG |
| SHL BE272 | | <ul style="list-style-type: none"> LED Power: 72W Operating Voltage: 10-30V DC Waterproof rate: IP 67 24pcs*3w high intensity Epistar LEDs Dimensions : 13.5 inch | \$ 15.0 | PKG size: 490*180*150 mm QTY: 6pcs/ctn N.W: 3kg/pcs Ctn Size: 510*480*370 mm Gross weight: 19KG |
| SHL BE2120 | | <ul style="list-style-type: none"> LED Power: 120W Operating Voltage: 10-30V DC Waterproof rate: IP 67 40pcs*3w high intensity Epistar LEDs Dimensions : 21.5 inch | \$ 18.0 | PKG size: 690*180*150 mm QTY: 6pcs/ctn N.W: 4kg/pcs Ctn Size: 720*480*370 mm Gross weight: 26KG |

| | | | | | |
|------------|---|--|----|------|---|
| SHL BE2180 |  | <ul style="list-style-type: none"> LED Power: 180W Operating Voltage: 10-30V DC Waterproof rate: IP 67 60pcs*3w high intensity Epistar LEDs Dimensions:31.5 inch | \$ | 27.0 | PKG size: 950*180*150 mm QTY: 4pcs/ctn N.W: 5.3kg/pcs Ctn Size: 970*370*330 mm Gross weight: 24KG |
| SHL BE2240 |  | <ul style="list-style-type: none"> LED Power: 240W Operating Voltage: 10-30V DC Waterproof rate: IP 67 80pcs*3w high intensity Epistar LEDs Dimensions:41.5 inch | \$ | 36.0 | PKG size: 1200*180*150 mm QTY: 4pcs/ctn N.W: 6.5kg/pcs Ctn Size: 124*37*33 cm Gross weight: 31KG |
| SHL BE2288 |  | <ul style="list-style-type: none"> LED Power: 288W Operating Voltage: 10-30V DC Waterproof rate: IP 67 96pcs*3w high intensity Epistar LEDs Dimensions:50 inch | \$ | 43.5 | PKG size: 1400*180*150 mm QTY: 4pcs/ctn N.W: 8.0 kg/pcs Ctn Size: 143*38*35 cm Gross weight: 39KG |
| SHL BE2300 |  | <ul style="list-style-type: none"> LED Power: 300W Operating Voltage: 10-30V DC Waterproof rate: IP 67 100pcs*3w high intensity Epistar LEDs Dimensions:51 inch | \$ | 45.0 | PKG size: 1400*180*150 mm QTY: 4pcs/ctn N.W: 8.0 kg/pcs Ctn Size: 143*38*35 cm Gross weight: 39KG |

double Row led bar —CREE : 36W;72W;120W;180W;240W; 288W; 300W


| | | | | | |
|------------|---|--|--|--|---|
| SHL-BC236 |  | <ul style="list-style-type: none"> LED Power: 36W Operating Voltage: 10-30V DC Waterproof rate: IP 67 12pcs*3w high intensity CREE LEDs Optional Color: Black/White Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Beam:8degree Spot/60degree flood/Combo 30000 hours above life time Dimensions : 7.5 inch | | CREE=\$11.5 4D/5D: \$14 | PKG size: 330*180*150 mm QTY: 6pcs/ctn N.W: 2kg/pcs Ctn Size: 470*370*370 mm Gross weight: 13KG |
| SHL-BC272 |  | <ul style="list-style-type: none"> LED Power: 72W Operating Voltage: 10-30V DC Waterproof rate: IP 67 24pcs*3w high intensity CREE LEDs Dimensions : 13.5 inch | | CREE=\$16 | PKG size: 490*180*150 mm QTY: 6pcs/ctn N.W: 3kg/pcs Ctn Size: 510*480*370 mm Gross weight: 19KG |
| SHL-BC2120 |  | <ul style="list-style-type: none"> LED Power: 120W Operating Voltage: 10-30V DC Waterproof rate: IP 67 40pcs*3w high intensity CREE LEDs Dimensions : 21.5 inch | | CREE=\$20 | PKG size: 690*180*150 mm QTY: 6pcs/ctn N.W: 4kg/pcs Ctn Size: 720*480*370 mm Gross weight: 26KG |
| SHL-BC2180 |  | <ul style="list-style-type: none"> LED Power: 180W Operating Voltage: 10-30V DC Waterproof rate: IP 67 60pcs*3w high intensity CREE LEDs Dimensions:31.5 inch | | CREE=\$29 | PKG size: 950*180*150 mm QTY: 4pcs/ctn N.W: 5.3kg/pcs Ctn Size: 970*370*330 mm Gross weight: 24KG |
| SHL-BC2240 |  | <ul style="list-style-type: none"> LED Power: 240W Operating Voltage: 10-30V DC Waterproof rate: IP 67 80pcs*3w high intensity CREE LEDs Dimensions:41.5 inch | | CREE=\$40 | PKG size: 1200*180*150 mm QTY: 4pcs/ctn N.W: 6.5kg/pcs Ctn Size: 124*37*33 cm Gross weight: 31KG |

| | | | | |
|------------|---|--|------------------|---|
| SHL-BC2288 |  | <ul style="list-style-type: none"> LED Power: 288W Operating Voltage: 10-30V DC Waterproof rate: IP 67 96pcs*3w high intensity CREE LEDs Dimensions:50 inch | CREE=\$46 | PKG size: 1400*180*150 mm QTY: 4pcs/ctn N.W: 8.0 kg/pcs Ctn Size: 143*38*35 cm Gross weight: 39KG |
| SHL-BC2300 |  | <ul style="list-style-type: none"> LED Power: 300W Operating Voltage: 10-30V DC Waterproof rate: IP 67 100pcs*3w high intensity CREE LEDs Dimensions:51 inch | CREE=\$48 | PKG size: 1400*180*150 mm QTY: 4pcs/ctn N.W: 8.0 kg/pcs Ctn Size: 143*38*35 cm Gross weight: 39KG |

double Row Curved led bar -Epistar :120W.180W.240W.288W

| | | | | |
|------------|---|--|---------|---|
| SHL BE120C |  | <ul style="list-style-type: none"> LED Power: 120W Operating Voltage: 10-30V DC Waterproof rate: IP 67 40pcs*3w high intensity Epistar LEDs Optional Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Beam:8degree Spot/60degree flood/Combo 30000 hours above life time Dimensions:20 inch | \$ 24.0 | PKG size: 71.5*13.5*21.5cm QTY: 4pcs/ctn N.W: 4kg/pcs Ctn Size: 73.5*29*46 cm Gross weight: 16KG |
| SHL BE180C |  | <ul style="list-style-type: none"> LED Power: 180W Operating Voltage: 10-30V DC Waterproof rate: IP 67 60pcs*3w high intensity Epistar LEDs Dimensions:30 inch | \$ 35.0 | PKG size: 97*13.5*21.5cm QTY: 4pcs/ctn N.W: 5kg/pcs Ctn Size: 99*29*46 cm Gross weight: 22KG |
| SHL BE240C |  | <ul style="list-style-type: none"> LED Power: 240W Operating Voltage: 10-30V DC Waterproof rate: IP 67 80pcs*3w high intensity Epistar LEDs Dimensions:40 inch | \$ 46.0 | PKG size: 1200*180*150 mm QTY: 4pcs/ctn N.W: 6.5kg/pcs Ctn Size: 124*37*33 cm Gross weight: 28KG |
| SHL BE288C |  | <ul style="list-style-type: none"> LED Power: 288W Operating Voltage: 10-30V DC Waterproof rate: IP 67 96pcs*3w high intensity Epistar LEDs Dimensions:50 inch | \$ 55.0 | PKG size: 1400*180*150 mm QTY: 4pcs/ctn N.W: 8.0 kg/pcs Ctn Size: 143*38*35 cm Gross weight: 32KG |
| SHL BE300C |  | <ul style="list-style-type: none"> LED Power: 300W Operating Voltage: 10-30V DC Waterproof rate: IP 67 100pcs*3w high intensity Epistar LEDs Dimensions:51.5 inch | \$ 56.0 | PKG size: 1400*180*150 mm QTY: 4pcs/ctn N.W: 8.0 kg/pcs Ctn Size: 143*38*35 cm Gross weight: 32KG |

double Row Curved led bar -CREE :120W.180W.240W.288W

| | | | | |
|------------|---|---|---|--|
| SHL BC120C |  | <ul style="list-style-type: none"> LED Power: 120W Operating Voltage: 10-30V DC Waterproof rate: IP 67 40pcs*3w high intensity CREE LEDs Optional Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Beam:8degree Spot/60degree flood/Combo 30000 hours above life time Dimensions:20 inch | normal=\$27 4D/5D=\$31 | PKG size: 71.5*13.5*21.5cm QTY: 4pcs/ctn N.W: 4kg/pcs Ctn Size: 73.5*29*46 cm Gross weight: 16KG |
|------------|---|---|---|--|

| | | | | |
|------------|---|--|---|---|
| SHL BC180C |  | <ul style="list-style-type: none"> LED Power: 180W Operating Voltage: 10-30V DC Waterproof rate: IP 67 60pcs*3w high intensity CREE LEDs Dimensions:30 inch | normal=\$40 4D/5D=\$47 | PKG size: 97*13.5*21.5cm QTY: 4pcs/ctn N.W: 5kg/pcs Ctn Size: 99*29*46 cm Gross weight: 21KG |
| SHL BC240C |  | <ul style="list-style-type: none"> LED Power: 240W Operating Voltage: 10-30V DC Waterproof rate: IP 67 80pcs*3w high intensity CREE LEDs Dimensions:40 inch | normal=\$53 4D/5D=\$62 | PKG size: 1200*180*150 mm QTY: 4pcs/ctn N.W: 6.5kg/pcs Ctn Size: 124*37*33 cm Gross weight: 28KG |
| SHL BC288C |  | <ul style="list-style-type: none"> LED Power: 288W Operating Voltage: 10-30V DC Waterproof rate: IP 67 96pcs*3w high intensity CREE LEDs Dimensions:50 inch | normal=\$63 4D/5D=\$74 | PKG size: 1400*180*150 mm QTY: 4pcs/ctn N.W: 8.0 kg/pcs Ctn Size: 143*38*35 cm Gross weight: 32KG |
| SHL BC300C |  | <ul style="list-style-type: none"> LED Power: 300W Operating Voltage: 10-30V DC Waterproof rate: IP 67 100pcs*3w high intensity CREE LEDs Dimensions:51.5 inch | normal=\$65 4D/5D=\$77 | PKG size: 1400*180*150 mm QTY: 4pcs/ctn N.W: 8.0 kg/pcs Ctn Size: 143*38*35 cm Gross weight: 32KG |

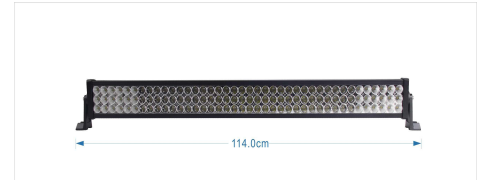

Double Row led bar –CREE : 18W;36W;54W;72W;90W;108W;126W;144W;198W;234W

| | | | | |
|-----------|---|--|--------------------|---|
| SHL BCT18 |  | <ul style="list-style-type: none"> LED Power: 18W Operating Voltage: 10-30 DC Waterproof rate: IP 67 6pcs*3w high intensity CREE LEDs Body Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PC Mounting Bracket: Alu firm bracket Beam: Flood beam pattern(60 degree), 30 degee spot beam optional 30000 hours above life time Dimensions:4.inch | CREE: \$4.6 | PKG size: 17*11.5*10.5 mm QTY: 12pcs/ctn N.W: 0.6 kg/pcs Ctn Size: 37*37*23.5 cm Gross weight: 11KG |
| SHL BCT36 |  | <ul style="list-style-type: none"> Power: 36 (12PCS*3W Cree LED) Voltage: 9-32V DC Luminous flux: 2520 Waterproof rate: IP67 Color temperature: 6500K Housing clor: black Material: aluminium alloy Lens: PC Beam type: Flood(60°), pencil(30°) Work temperature:-40°C~85°C Work life: 50000 hours Dimensions: 6.5inch | CREE: \$8 | PKG size: 34*11.5*10.5 mm QTY: 6pcs/ctn N.W: 1.5 kg/pcs Ctn Size: 37*37*23.5 cm Gross weight: 11KG |
| SHL BCT54 |  | <ul style="list-style-type: none"> Power: 54 (18PCS*3W Cree LED) Voltage: 9-32V DC Luminous flux: 3780 Waterproof rate: IP67 Dimensions: 9 inch | CREE:\$11.5 | PKG size: 49*11.5*10.5 mm QTY: 6pcs/ctn N.W: 1.8 kg/pcs Ctn Size: 51*37*23.5 cm Gross weight: 12KG |
| SHL BCT72 |  | <ul style="list-style-type: none"> Power: 72 (24PCS*3W Cree LED) Voltage: 9-32V DC Luminous flux: 5040 Waterproof rate: IP67 Dimensions: 12 inch | CREE: \$13 | PKG size: 50*11.5*10.5 mm QTY: 6pcs/ctn N.W: 2.5 kg/pcs Ctn Size: 51*37*23.5 cm Gross weight: 15KG |
| SHL BCT90 |  | <ul style="list-style-type: none"> Power: 90 (30PCS*3W Cree LED) Voltage: 9-32V DC Luminous flux: 8100 Waterproof rate: IP67 Dimensions: 15 inch | CREE:\$16 | PKG size: 50*11.5*10.5 mm QTY: 6pcs/ctn N.W: 3 kg/pcs Ctn Size: 54*37*23.5 cm Gross weight: 20KG |









| | | | | |
|------------|--|--|--------------------|--|
| SHL BCT108 |  | Power: 108 (36PCS*3W Cree LED) Voltage: 9-32V DC Luminous flux: 7560 Waterproof rate: IP67 Dimensions: 17 inch | CREE:\$17.5 | |
| SHL BCT126 |  | Power: 126 (42PCS*3W Cree LED) Voltage: 9-32V DC Luminous flux: 7560 Waterproof rate: IP67 Dimensions: 20 inch | CREE:\$20 | PKG size: 64*11.5*10.5 mm QTY: 4pcs/ctn N.W: 4 kg/pcs Ctn Size: 66*37*23.5 cm Gross weight: 14KG |
| SHL BCT144 |  | Power: 144 (48PCS*3W Cree LED) Voltage: 9-32V DC Luminous flux:12960 Waterproof rate: IP67 Dimensions: 23" | CREE:\$23 | PKG size: 70*11.5*10.5 mm QTY: 4pcs/ctn N.W: 4.5 kg/pcs Ctn Size: 74*26*27 cm Gross weight: 20KG |
| SHL BCT180 |  | Power: 180 (60PCS*3W Cree LED) Voltage: 9-32V DC Luminous flux: 18000 Waterproof rate: IP67 Dimensions: 28 inch | CREE: \$28 | PKG size: 73*10*7 mm QTY: 4pcs/ctn N.W: 3.5 kg/pcs Ctn Size: 76*26*27 cm Gross weight: 15KG |
| SHL BCT198 |  | .LED Power: 198W . Operating Voltage: 10-30 DC . Waterproof rate: IP 67 . 66pcs*3w high intensity CREE LEDES . Dimensions:30 inch | CREE:\$30 | PKG size: 90*11.5*10.5 mm QTY: 4pcs/ctn N.W: 6.5 kg/pcs Ctn Size: 92*37*23.5 cm Gross weight: 26KG |
| SHL BCT234 |  | .LED Power: 234W . Operating Voltage: 10-30 DC . Waterproof rate: IP 67 . 6pcs*3w high intensity CREE LEDES . Dimensions:37inch | CREE:\$35 | PKG size: 110*11.5*10.5 mm QTY: 4pcs/ctn N.W: 8 kg/pcs Ctn Size: 112*37*23.5 cm Gross weight: 32KG |
| SHL BCT252 | | 39"/252W 84pcs*3w/22680LM | \$ 38.0 | 5kg/pc 134*12*12cm 4pc/ctn 136*26*28cm 20kg/ctn |
| SHL BCT288 | | 42.8"/288W 96pcs*3w/25920LM | \$ 43.0 | 5.5kg/pc 134*12*12cm 4pc/ctn 136*26*28cm 22kg/ctn |



Three Row led bar-Eplstar: 72W;180W; 270W;360W;450W.

| | | | | |
|------------|---|--|----------------|---|
| SHL BET72 |  | .LED Power: 72W .Intensity:4680LM . Operating Voltage: 10-30 DC . Waterproof rate: IP 67 . 24pcs*3w high intensity LEDES . Body Color: Black,White . Color Temperature: 6000K . Material:Diecast aluminum housing . Lens material: Toughed glass . Mounting Bracket: Alu firm bracket . Beam: Flood beam pattern(60 degree), . 30 degee spot beam optional . 30000 hours above life time . Dimensions:11.5 inch | \$ 20.0 | PKG size: 32.5*9.5*14.5 mm QTY: 6pcs/ctn N.W: 2.5 kg/pcs Ctn Size: 41*36*29 cm Gross weight: 15KG |
| SHL BET180 |  | . LED Power: 180W,Intensity:11700LM . Operating Voltage: 10-30 DC . Waterproof rate: IP 67 . 60pcs*3w high intensity LEDES . Dimensions:21.5 inch | \$ 34.0 | PKG size: 63*9.5*14.5 mm QTY: 4pcs/ctn N.W: 4 kg/pcs Ctn Size: 86*25*29 cm Gross weight: 17KG |
| SHL BET270 |  | . LED Power: 270W,Intensity:188900LM . Operating Voltage: 10-30 DC . Waterproof rate: IP 67 . 90pcs*3w high intensity LEDES . Dimensions:35 inch | \$ 53.0 | PKG size: 72*9.5*14.5 mm QTY: 4pcs/ctn N.W: 6 kg/pcs Ctn Size: 95*25*29 cm Gross weight: 31KG |











| | | | | |
|------------|---|--|---------|---|
| SHL BET360 |  | <ul style="list-style-type: none"> LED Power: 360W, Intensity: 25200LM Operating Voltage: 10-30 DC Waterproof rate: IP 67 120pcs*3w high intensity LEDS Dimensions: 45inch | \$ 70.0 | <ul style="list-style-type: none"> PKG size: 81*9.5*14.5 mm QTY: 2pcs/ctn N.W: 8 kg/pcs Ctn Size: 104*25*29 cm Gross weight: 17KG |
| SHL BET450 |  | <ul style="list-style-type: none"> LED Power: 450W, Intensity: 31500LM Operating Voltage: 10-30 DC Waterproof rate: IP 67 150pcs*3w high intensity LEDS Dimensions: 55 inch | \$ 90.0 | <ul style="list-style-type: none"> PKG size: 90*9.5*14.5 mm QTY: 2pcs/ctn N.W: 10 kg/pcs Ctn Size: 113*25*29 cm Gross weight: 20KG |

Four Row Led Bar - CREE : 48W;72W;96W;120W;144W;168W;216W;288W



| | | | | |
|------------|---|--|------------|---|
| SHL BEF36 |  | <ul style="list-style-type: none"> LED Power: 48W; 3200LM Operating Voltage: 10-30 DC Waterproof rate: IP 67 12pcs*3w high intensity CREE LEDS Body Color: Black, Color Temperature: 6000K Material: Diecast Aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Beam: spot/flood 30000 hours above life time Dimensions: 145*150.5*93mm | CREE: \$15 | <ul style="list-style-type: none"> PKG size: 23*21.5*14 cm QTY: 8pcs/ctn N.W: 2kg/pcs Ctn Size: 47*44*30 cm Gross weight: 18KG |
| SHL BEF72 |  | <ul style="list-style-type: none"> LED Power: 72W; 5040LM Operating Voltage: 10-30 DC Waterproof rate: IP 67 24pcs*3w high intensity CREE LEDS Dimensions: 167*168*93mm | CREE: \$22 | <ul style="list-style-type: none"> PKG size: 28.2*21.5*14mm QTY: 8pcs/ctn N.W: 2.5kg/pcs Ctn Size: 57.5*44*30 cm Gross weight: 22KG |
| SHL BEF108 |  | <ul style="list-style-type: none"> LED Power: 96W; 6720LM Operating Voltage: 10-30 DC Waterproof rate: IP 67 32pcs*3w high intensity CREE LEDS Dimensions: 235*168*93mm | CREE: \$29 | <ul style="list-style-type: none"> PKG size: 33.5*21.5*14 mm QTY: 4pcs/ctn N.W: 3.5kg/pcs Ctn Size: 34.5*44*30 cm Gross weight: 15KG |
| SHL BEF144 |  | <ul style="list-style-type: none"> LED Power: 120W; 8400LM Operating Voltage: 10-30 DC Waterproof rate: IP 67 48pcs*3w high intensity CREE LEDS Dimensions: 305*168*93mm | CREE: \$39 | <ul style="list-style-type: none"> PKG size: 26.5*9*14.5 mm QTY: 6pcs/ctn N.W: 4.5kg/pcs Ctn Size: 59*29*32 cm Gross weight: 22KG |
| SHL BEF180 |  | <ul style="list-style-type: none"> LED Power: 144W; 10080LM Operating Voltage: 10-30 DC Waterproof rate: IP 67 60pcs*3w high intensity CREE LEDS Dimensions: 381*168*93mm | CREE: \$48 | <ul style="list-style-type: none"> PKG size: 26.5*9*14.5 mm QTY: 4pcs/ctn N.W: 5 kg/pcs Ctn Size: 59*29*32 cm Gross weight: 22KG |
| SHL BEF216 |  | <ul style="list-style-type: none"> LED Power: 216W; 10080LM Operating Voltage: 10-30 DC Waterproof rate: IP 67 72pcs*3w high intensity CREE LEDS Dimensions: 432*168*93mm | CREE: \$58 | <ul style="list-style-type: none"> PKG size: 59*21.5*14mm QTY: 4pcs/ctn N.W: 6kg/pcs Ctnize: 60*44*30 cm Gross weight: 26KG |
| SHL BEF252 |  | <ul style="list-style-type: none"> LED Power: 240W; 16800LM Operating Voltage: 10-30 DC Waterproof rate: IP 67 84pcs*3w high intensity CREE LEDS Dimensions: 502*150.5*93mm | CREE: \$67 | <ul style="list-style-type: none"> PKG size: 59*21.5*14mm QTY: 4pcs/ctn N.W: 6kg/pcs Ctnize: 60*44*30 cm Gross weight: 26KG |
| SHL BEF288 |  | <ul style="list-style-type: none"> LED Power: 288W; 15500LM Operating Voltage: 10-30 DC Waterproof rate: IP 67 96pcs*3w high intensity CREE LEDS Dimensions: 655*150.5*93mm | CREE: \$77 | <ul style="list-style-type: none"> PKG size: 26.5*9*14.5 mm QTY: 4pcs/ctn N.W: 6.5kg/pcs Ctn Size: 59*29*32 cm Gross weight: 28KG |






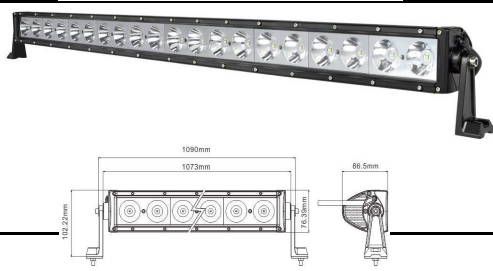





| | | | | |
|------------|---|--|------------------|--|
| SHL BEF324 |  | <ul style="list-style-type: none"> .LED Power: 456W; 31008LM . Operating Voltage: 10-30 DC . Waterproof rate: IP 67 . 108pcs*3w high intensity CREE LEDs . Dimensions:655*150.5*93mm | CREE:\$87 | PKG size: 26.5*9*14.5 mm QTY: 2pcs/ctn N.W: 10kg/pcs Ctn Size: 59*29*32 cm Gross weight: 22KG |
| SHL BEF360 |  | <ul style="list-style-type: none"> .LED Power: 480W; 32640LM . Operating Voltage: 10-30 DC . Waterproof rate: IP 67 . 120pcs*3w high intensity CREE LEDs . Dimensions:703*168*93mm | CREE:\$96 | PKG size: 114.5*21*14.5 mm QTY: 2pcs/ctn N.W: 11.5kg/pcs Ctn Size: 117*48*14 cm Gross weight: 25KG |





Single Row- Cree 10w : 30W/60W/90W/120W/150W/180W/210W/240W/270W/300W full white/full amber/ white +amber (same price for amber lens)

| | | | | |
|-------------------|---|--|---------|----------------------|
| SHL BA30 (6") |  | <ul style="list-style-type: none"> LED Power: 30w(3pcs*10w CREE LED) Lums: 2850 lm Size: 152*70*103 mm Beam Type: Spot, Flood | \$ 13.0 | 0.8kg/pc 12pc/ctn |
| SHL BA60 (11.3") |  | <ul style="list-style-type: none"> LED Power: 60w(6pcs*10w CREE LED) Lums: 5700 lm Size: 287*70*103 mm Beam Type: Spot, Flood | \$ 21.0 | 1.6kg/pc 12pc/ctn |
| SHL BA90 (16.6") |  | <ul style="list-style-type: none"> LED Power: 90w(9pc*10w CREE LED) Lumens: 8550 lm Size: 422*70*103 mm Beam Type: Spot, Flood, Combo beam Current draw: 6.75A@12V, | \$ 31.0 | 2.5kg/pc 6pc/ctn |
| SHL BA120 (22") |  | <ul style="list-style-type: none"> LED Power: 120w(12pcs*10w CREE LED) Lums: 11400 lm Size: 557*70*103 mm Beam Type: Spot, Flood, Combo | \$ 34.5 | 3kg/pc 6pc/ctn |
| SHL BA150 (27.3") |  | <ul style="list-style-type: none"> LED Power: 150w(15pcs*10w CREE LED) Lums: 14250 lm Size: 692*70*103 mm Beam Type: Spot, Flood, Combo | \$ 43.0 | 3.5kg/pc 6pc/ctn |
| SHL BA180 (32.6") |  | <ul style="list-style-type: none"> LED Power: 180w(18pcs*10w CREE LED) Lums: 17100 lm Size: 827*70*103 mm Beam Type: Spot, Flood, Combo | \$ 52.0 | 4.5kg/pc 4pc/ctn |
| SHL BA210 (38") |  | <ul style="list-style-type: none"> LED Power: 210w(21pcs*10w CREE LED) Lums: 19950 lm Size: 962*70*103 mm Beam Type: Spot, Flood, Combo | \$ 61.0 | 5kg/pc 4pc/ctn |
| SHL BA240 (43.2") |  | <ul style="list-style-type: none"> LED Power: 240w(24pcs*10w CREE LED) Luminous flux: 22800 lm Size: 1097*70*103 mm Beam Type: Spot, Flood, Combo | \$ 69.0 | 5.5kg/pc 4pc/ctn |
| SHL BA270 (48.5") |  | <ul style="list-style-type: none"> LED Power: 270w(27pcs*10w CREE LED) Luminous flux: 25650 lm Size: 1232*70*103 mm Beam Type: Spot, Flood, Combo | \$ 78.0 | 6.5kg/pc 4pc/ctn |
| SHL BA300 (53.8") |  | <ul style="list-style-type: none"> LED Power: 300w(30pcs*10w CREE LED) Lums: 28500 lm Size: 1367*70*103 mm Beam Type: Spot, Flood, Combo | \$ 86.0 | 7.5kg/pc 4pc/ctn |

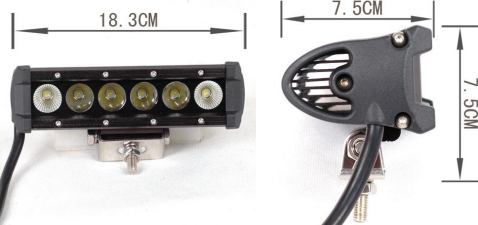


Single Row led bar-CREE(10W/PC) : 20W;40W;60W;80W;100W;120W;140W;160W;200W;200W;240W;260W

| | | | | |
|------------------|---|--|---------|---|
| SHL BCS20 (5.6") |  | <ul style="list-style-type: none"> .LED Power:20W,Intensity:1800LM .Operating Voltage:10-30DC .Waterproof rate: IP67 .2pcs*10w high intensity CREE LEDs .Body Color:Black, White .Color Temperature:6000K .Material:Diecast aluminum housing .Lens material:PC .Mounting Bracket:Alu firm bracket .Optional Beam:Flood beam pattern(60 degree),or spot beam(30 degee) .30000 hours above life time | \$ 12.0 | PKG size: 18.5*9*11 mm QTY: 8pcs/ctn N.W: 1.25kg/pcs Ctn Size: 38*25*28 cm Gross weight: 11KG |
| SHL BCS40 (9.2") |  | <ul style="list-style-type: none"> .LED Power:40W,Intensity:3600LM .Operating Voltage:10-30DC .Waterproof rate: IP67 .8pcs*10w high intensity CREE LEDs | \$ 15.4 | PKG size: 27.5*9*11 mm QTY: 8pcs/ctn N.W: 1.5kg/pcs Ctn Size: 68*26*28 cm Gross weight: |

| | | | | |
|---|---|--|---------|--|
| SHL-BCS60 (12.7") |  | <ul style="list-style-type: none"> LED Power: 60W ; 5400LM Operating Voltage: 10-30V DC Waterproof rate: IP 67 6pcs*10w high intensity CREE LEDs | \$ 19.5 | <ul style="list-style-type: none"> PKG size: 490*180*150 mm QTY: 6pcs/ctn N.W: 3kg/pcs Ctn Size: 510*480*370 mm Gross weight: 19KG |
| SHL BCS80 (16.3") |  | <ul style="list-style-type: none"> LED Power:80W,Intensity:7200LM Operating Voltage:10-30DC Waterproof rate: IP67 8pcs*10w high intensity CREE LEDs | \$ 24.0 | <ul style="list-style-type: none"> PKG size: 490*180*150 mm QTY: 6pcs/ctn N.W: 3kg/pcs Ctn Size: 510*480*370 mm Gross weight: 19KG |
| SHL-BCS100 (23.3") |  | <ul style="list-style-type: none"> LED Power: 100W; 9000LM Operating Voltage: 10-30V DC Waterproof rate: IP 67 10pcs*10w high intensity CREE LEDs | \$ 28.0 | <ul style="list-style-type: none"> PKG size: 690*180*150 mm QTY: 6pcs/ctn N.W: 4kg/pcs Ctn Size: 720*480*370 mm Gross weight: 20KG |
| SHL BCS120 (25") |  | <ul style="list-style-type: none"> LED Power:120W,Intensity:10800LM Operating Voltage:10-30DC Waterproof rate: IP67 12pcs*10w high intensity CREE LEDs | \$ 31.0 | <ul style="list-style-type: none"> PKG size: 63.5*9*11 mm QTY: 4pcs/ctn N.W: 3kg/pcs Ctn Size: 63*25*29 mm Gross weight 12KG |
| SHL BCS160 (30.5") |  | <ul style="list-style-type: none"> LED Power:160W,Intensity:14400LM Operating Voltage:10-30DC Waterproof rate: IP67 16pcs*10w high intensity CREE LEDs | \$ 42.0 | <ul style="list-style-type: none"> PKG size: 81.5*9*11 mm QTY: 4pcs/ctn N.W: 5kg/pcs Ctn Size: 96*25*29 mm Gross weight: 20KG |
| SHL-BCS200 (37.7") |  | <ul style="list-style-type: none"> LED Power: 200W; 18000LM Operating Voltage: 10-30V DC Waterproof rate: IP 67 20pcs*10w high intensity CREE LEDs | \$ 52.0 | <ul style="list-style-type: none"> PKG size: 1200*180*150 mm QTY: 4pcs/ctn N.W: 6.5kg/pcs Ctn Size: 124*37*33 cm Gross weight: 31KG |
| SHL-BCS240 (45") |  | <ul style="list-style-type: none"> LED Power:240W,Intensity:20640LM Operating Voltage:10-30DC Waterproof rate: IP67 24pcs*10w high intensity CREE LEDs | \$ 62.0 | <ul style="list-style-type: none"> PKG size: 117.5*9*11 mm QTY: 4pcs/ctn N.W: |
| SHL BCS260 (48.2") |  | <ul style="list-style-type: none"> LED Power:260W,Intensity:23400LM Operating Voltage:10-30DC Waterproof rate: IP67 26pcs*10w high intensity CREE LEDs | \$ 67.5 | <ul style="list-style-type: none"> PKG size: 126.5*9*11 mm QTY: 4pcs/ctn N.W: |
| Single Row led bar--CREE(10W/PC) : 20W;40W;80W;120W;160W;200W;260W | | | | |
| SHL BSC20 |  | <ul style="list-style-type: none"> LED Power:20W,Intensity:1700LM Operating Voltage:10-45DC Waterproof rate: IP67 2pcs*10w high intensity CREE LEDs Body Color:Black Color Temperature:6000K Material:Diecast aluminum housing Lens material:PC Mounting Bracket:Alu firm bracket Optional Beam:Flood beam pattern(60 degree),or spot beam(30 degree) 30000 hours above life time Dimensions:5 inch | \$ 13.0 | <ul style="list-style-type: none"> PKG size: mm QTY: 10pcs/ctn N.W: 1.25kg/pcs Ctn Size: mm Gross weight: 14KG |
| SHL BSC40 |  | <ul style="list-style-type: none"> LED Power:40W,Intensity:3400LM Operating Voltage:10-45DC Waterproof rate: IP67 4pcs*10w high intensity CREE LEDs | \$ 20.0 | <ul style="list-style-type: none"> PKG size: mm QTY: 6pcs/ctn N.W: 2kg/pcs Ctn Size: cm Gross weight: 14KG |
| SHL BSC80 |  | <ul style="list-style-type: none"> LED Power:80W,Intensity:6800LM Operating Voltage:10-45DC Waterproof rate: IP67 8pcs*10w high intensity CREE LEDs | \$ 31.0 | <ul style="list-style-type: none"> PKG size: mm QTY: 6pcs/ctn N.W: 3kg/pcs Ctn Size: cm Gross weight: 14KG |

| | | | | |
|-------------------|---|---|----------------|---|
| SHL BSC120 |  | <ul style="list-style-type: none"> LED Power:120W,Intensity:10200LM Operating Voltage:10-45DC Waterproof rate: IP67 12pcs*10w high intensity CREE LEDS | \$ 42.0 | <ul style="list-style-type: none"> PKG size: mm QTY: 4pcs/ctn N.W: 4.5kg/pcs Ctn Size: cm Gross weight: 20KG |
| SHL BSC160 |  | <ul style="list-style-type: none"> LED Power:140W,Intensity:15300LM Operating Voltage:10-45DC Waterproof rate: IP67 16pcs*10w high intensity CREE LEDS | \$ 56.0 | <ul style="list-style-type: none"> PKG size: mm QTY: 4pcs/ctn N.W: 5kg/pcs Ctn Size: cm Gross weight: 20KG |
| SHL BSC200 |  | <ul style="list-style-type: none"> LED Power:200W,Intensity:17000LM Operating Voltage:10-45DC Waterproof rate: IP67 20pcs*10w high intensity CREE LEDS | \$ 70.0 | <ul style="list-style-type: none"> PKG size: mm QTY: 4pcs/ctn N.W: 6.5kg/pcs Ctn Size: Gross weight: 20KG |
| SHL BSC260 |  | <ul style="list-style-type: none"> LED Power:260W,Intensity:20400LM Operating Voltage:10-45DC Waterproof rate: IP67 26pcs*10w high intensity CREE LEDS | \$ 90.0 | <ul style="list-style-type: none"> PKG size: mm QTY: 4pcs/ctn N.W: 8kg/pcs Ctn Size: Gross weight: 20KG |

Single Row led bar--Epistar/CREE (5W/PC) : 30W;60W;120W;180;240W

| | | | | |
|---------------------------|---|---|------------------------------------|--|
| SHL BES30 (7.2") |  | <ul style="list-style-type: none"> LED Power: 30W Operating Voltage: 10-30 DC Waterproof rate: IP 67 6pcs*5w high intensity LEDS Body Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material:PC Mounting Bracket: Alu firm bracket Beam: Flood beam pattern(60 degree), 30 degee spot beam optional 30000 hours above life time Dimensions:7.5inch | \$9.6(Epistar); \$11(CREE) | <ul style="list-style-type: none"> PKG size: 18.5*7.5*10 mm QTY: 12pcs/ctn N.W: 0.7 kg/pcs Ctn Size: 38*30*47 cm Gross weight: 10KG |
| SHL BES60 (13.1") |  | <ul style="list-style-type: none"> LED Power: 60W Operating Voltage: 10-30 DC Waterproof rate: IP 67 12pcs*5w high intensity LEDS | \$17(Epistar); \$18.5(CREE) | <ul style="list-style-type: none"> PKG size: 31.5*7.5*10 mm QTY: 6pcs/ctn N.W: 1kg/pcs Ctn Size:45*30*47 cm Gross weight: 6KG |
| SHL BES120 (25") |  | <ul style="list-style-type: none"> LED Power: 120W Operating Voltage: 10-30 DC Waterproof rate: IP 67 24pcs*5w high intensity LEDS | 27(Epistar); \$29(CREE) | <ul style="list-style-type: none"> PKG size: 63*7.5*10 mm QTY: 6pcs/ctn N.W: 2kg/pcs Ctn Size:75*30*47 cm Gross weight: 12KG |
| SHL BES180 (36.7") |  | <ul style="list-style-type: none"> LED Power: 180W Operating Voltage: 10-30 DC Waterproof rate: IP 67 36pcs*5w high intensity LEDS | \$40(Epistar); \$42CREE) | <ul style="list-style-type: none"> PKG size: 94*7.5*10 mm QTY: 6pcs/ctn N.W: 3kg/pcs Ctn Size:105*30*47 cm Gross weight: 18KG |
| SHL BES240 (48.5") |  | <ul style="list-style-type: none"> LED Power: 240W Operating Voltage: 10-30 DC Waterproof rate: IP 67 48pcs*5w high intensity LEDS | \$53(Epistar); \$56(CREE) | <ul style="list-style-type: none"> PKG size: 120*7.5*10 mm QTY: 4pcs/ctn N.W: 6kg/pcs Ctn Size:134*30*47 cm Gross weight: 24KG |

Single Row Led Bar --CREE(10W/pc) :20W;40W;60W;100W;120W;180W;240W;260W

| | | | | |
|------------------|---|--|----------------|---|
| SHL-D4020 |  | <ul style="list-style-type: none"> LED Power: 20W Operating Voltage: 9-70V DC Waterproof rate: IP 67 2pcs*10w high intensity CREE LEDS Optional Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Beam:8degree Spot/60degree flood/spot 30000 hours above life time Dimensions : 4.6 inch | \$ 11.5 | <ul style="list-style-type: none"> size: 116*92*64 mm QTY: 20pcs/ctn N.W: 1.0kg/pcs Ctn Size: 60*28*28 cm Gross weight: 23KG |
|------------------|---|--|----------------|---|

| | | | | |
|-----------|--|---|---------|---|
| SHL-D4040 |  7.8" | <ul style="list-style-type: none"> LED Power: 40W Operating Voltage: 9-70V DC Waterproof rate: IP 67 4pcs*10w high intensity CREE LEDs | \$ 16.0 | <ul style="list-style-type: none"> size: 198*92*64 mm QTY: 10pcs/ctn N.W: 1.5kg/pcs Ctn Size: 60*32*28 cm Gross weight: 17KG |
| SHL-D4060 |  10.9" | <ul style="list-style-type: none"> LED Power: 60W Operating Voltage: 9-70V DC Waterproof rate: IP 67 6pcs*10w high intensity CREE LEDs | \$ 20.0 | <ul style="list-style-type: none"> size: 276*92*64 mm QTY: 10pcs/ctn N.W: 2.0kg/pcs Ctn Size: 60*32*28 cm Gross weight: 22KG |
| SHL-D4100 |  17.2" | <ul style="list-style-type: none"> LED Power: 100W Operating Voltage: 9-70V DC Waterproof rate: IP 67 10pcs*10w high intensity CREE LEDs | \$ 31.0 | <ul style="list-style-type: none"> size: 436*92*64 mm QTY: 6pcs/ctn N.W: 3.0kg/pcs Ctn Size: 55*36*28 cm Gross weight: 20KG |
| SHL-D4120 |  20.3" | <ul style="list-style-type: none"> LED Power: 120W Operating Voltage: 9-70V DC Waterproof rate: IP 67 12pcs*10w high intensity CREE LEDs | \$ 35.0 | <ul style="list-style-type: none"> size: 515*92*64 mm QTY: 6pcs/ctn N.W: 3.5kg/pcs Ctn Size: 55*36*28 cm Gross weight: 23KG |
| SHL-D4180 |  29.3" | <ul style="list-style-type: none"> LED Power: 180W Operating Voltage: 9-70V DC Waterproof rate: IP 67 18pcs*10w high intensity CREE LEDs | \$ 53.0 | <ul style="list-style-type: none"> size: 744*92*64 mm QTY: 6pcs/ctn N.W: 5.0kg/pcs Ctn Size: 78*36*28 cm Gross weight: 32KG |
| SHL-D4240 |  39.1" | <ul style="list-style-type: none"> LED Power: 240W Operating Voltage: 9-70V DC Waterproof rate: IP 67 24pcs*10w high intensity CREE LEDs | \$ 70.0 | <ul style="list-style-type: none"> size: 993*92*64 mm QTY: 6pcs/ctn N.W: 6.5kg/pcs Ctn Size: 110*36*28 cm Gross weight: 41KG |
| SHL-D4260 |  42.4" | <ul style="list-style-type: none"> LED Power: 260W Operating Voltage: 9-70V DC Waterproof rate: IP 67 26pcs*10w high intensity CREE LEDs Dimensions : 42.4 inch | \$ 76.0 | <ul style="list-style-type: none"> size: 1076*92*64 mm QTY: 6pcs/ctn N.W: 7.0kg/pcs Ctn Size: 110*36*28 cm Gross weight 44KG |

Double Row led bar –CREE(10W/pc) : 40W;80W;120W;240W

| | | | | |
|-----------|---|---|---------|---|
| SHL-D2040 |  | <ul style="list-style-type: none"> LED Power: 40W (4.6") Operating Voltage: 9-70V DC Waterproof rate: IP 67 4pcs*10w high intensity CREE LEDs Optional Color: Black,White Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Beam:8degree Spot/60degree flood/Combo 30000 hours above life time Dimensions : 4.6 inch | \$ 16.0 | <ul style="list-style-type: none"> size: 116*92*128 mm QTY: 12pcs/ctn N.W: 1.25kg/pcs Ctn Size: 48*35*29 cm Gross weight: 15.5KG |
| SHL-D2080 |  | <ul style="list-style-type: none"> LED Power: 80W (7.8") Operating Voltage: 9-70V DC Waterproof rate: IP 67 8pcs*10w high intensity CREE LEDs Dimensions : 7.8 inch | \$ 24.0 | <ul style="list-style-type: none"> size: 198X92X128 mm QTY: 6pcs/ctn N.W: 2 kg/pcs Ctn Size: 48*35*29 cm Gross weight: 13KG |
| SHL-D2120 |  | <ul style="list-style-type: none"> LED Power: 120W (10.9") Operating Voltage: 9-70V DC Waterproof rate: IP 67 26pcs*10w high intensity CREE LEDs Dimensions : 10.9 inch | \$ 33.5 | <ul style="list-style-type: none"> size: 276X92X128 mm QTY: 6pcs/ctn N.W: 2.55 kg/pcs Ctn Size: 48*35*29 cm Gross weight 16.5KG |

| | | | | |
|------------|---|---|---------|---|
| SHL D2160 |  | <ul style="list-style-type: none"> LED Power: 160W (17.2") Operating Voltage: 9-70V DC Waterproof rate: IP 67 16pcs*10w high intensity CREE LEDs Dimensions : 17.2 inch | \$ 44.5 | <ul style="list-style-type: none"> size: cm QTY: 6pcs/ctn N.W: 2.55 kg/pcs Ctn Size: 57*37*29 cm Gross weight: 21KG |
| SHL-D2200 |  | <ul style="list-style-type: none"> LED Power: 200W (17.5") Operating Voltage: 9-70V DC Waterproof rate: IP 67 20pcs*10w high intensity CREE LEDs Dimensions : 17.2 inch | \$ 56.0 | <ul style="list-style-type: none"> size: cm QTY: 6pcs/ctn N.W: 2.55 kg/pcs Ctn Size: 57*37*29 cm Gross weight: 21KG |
| SHL-D2240 |  | <ul style="list-style-type: none"> LED Power: 240W (20.3") Operating Voltage: 9-70V DC Waterproof rate: IP 67 24pcs*10w high intensity CREE LEDs Dimensions : 20.3 inch | \$ 67.0 | <ul style="list-style-type: none"> size: 515X92X128 mm QTY: 6pcs/ctn N.W: 4.5kg/pcs Ctn Size: 61*39*32 cm Gross weight: 27.5KG |
| SHL -D2320 | | <ul style="list-style-type: none"> LED Power: 320W (27") Operating Voltage: 9-70V DC Waterproof rate: IP 67 32pcs*10w high intensity CREE LEDs Dimensions : | \$ 89.0 | <ul style="list-style-type: none"> 6.5kg/pcs 86*12*12cm / 88*37*30.5cm / 26kg/ctn 4pcs/carton |
| SHL-D2360 | | <ul style="list-style-type: none"> LED Power: 360W (30") Operating Voltage: 9-70V DC Waterproof rate: IP 67 36pcs*10w high intensity CREE LEDs Dimensions : | \$ 97.0 | <ul style="list-style-type: none"> 7.5kg/pcs 92*12*12cm / 94*37*30.5cm / 30kg /4pcs/carton |

SLIM Design Single Row led bar -CREE(5W/pc) : 30W;60W;90W;120W;150W;180W;210W;240W

| | | | | |
|-------------------|--|---|------------|---|
| SHL BD30 (7.3") |  | <ul style="list-style-type: none"> 5w High intensity CREE LED Operating Voltage: 9-60V DC Color Temperature: 6500K Working Temperature: -40°C~+ 85°C Beam Type: spot / flood Material: Aluminum diecast housing, PC lens, Alu adjustable bracket Housing Color: Black Life time: 30000 hours above Product Standard: CE ROHS IP67 | CREE: \$21 | LED power:30w Lumen:2100 Size:186*82.8*54.5 mm |
| SHL BD50 (10.5") | | | CREE: \$29 | LED power:50w Lumen:2600 Size:186*82.8*54.5 mm |
| SHL BD60 (13") | | | CREE: \$32 | LED power:60w Lumen:7000 Size:338*82.8*54.5 mm |
| SHL BD90 (19") | | | CREE: \$43 | LED power:90w Lumen:7000 Size:488*82.8*54.5 mm |
| SHL BD100 (21.5") | | | CREE: \$45 | LED power:100w Lumen:8500 Size:488*82.8*54.5 mm |
| SHL BD120 (25") | | | CREE: \$53 | LED power:120w Lumen:10000 Size:639*82.8*54.5 mm |
| SHL BD150 (31") | | | CREE: \$65 | LED power:150w Lumen:12750 Size:789*82.8*54.5 mm |
| SHL BD180 (37") | | | CREE: \$76 | LED power:180w Lumen:15000 Size:939*82.8*54.5 mm |
| SHL BD210 (45") | | | CREE: \$86 | LED power:210w Lumen:17800 Size:1140*82.8*54.5 mm |
| SHL BD240 (49") | | | CREE: \$95 | LED power:240w Lumen:20400 Size:1240*82.8*54.5 mm |
| SHL BD250 (51") | CREE: \$100 | LED power:250w Lumen:21250 Size:1390*82.8*54.5 mm | | |
| SHL BD270 (55") | CREE: \$107 | LED power:270w Lumen:22950 Size:1390*82.8*54.5 mm | | |

2) Warranty: 1year

2) Delivery: <100pc within 3days. >100pc within 5days.

3) Terms of payment: T/T, WesterUnion, Moneygram.Paypal, Escrow

4) MOQ: 1 carton