



Guangzhou Baohua Auto Maintenance Equipment Trade Co.,Ltd

ADD;RoomA6,Firstfloor,guangyuanmiddleroad,baiyundistrict,guangzhou,China

Tel: +86 20 22019669 E-mail:auto2@gzbaohua.net


Attn:Nicole Ma Mobile:+86 15089764740

Catalogue



广州市保骅汽保设备有限公司
Guangzhou Baohua Auto Maintenance Equipment Trade Co.,Ltd

Spray Booth 豪华型 BZB-8500(960)Luxurious

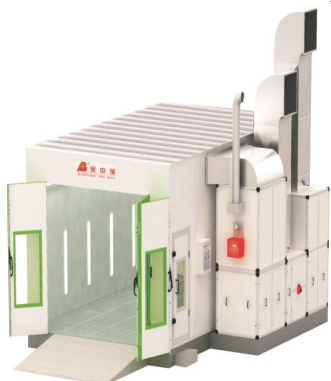


产品详情 Details:

- ◆ 墙板厚为: 70mm, 两台4kw的送风机, 风量: 25000m³/h; 一台7.5kw的排风机, 风量: 20000m³/h;
- ◆ 采用活性炭过滤废弃, 废气排放达到国际标准。
- ◆ Wallboard:70mm thick.Two 4kw of Inlet Fan, capacity:25000m³/h. One 7.5kw of outlet fan, capacity:20000m³/h. Multi-layer fiberglass filter, active-carbon. Achieve international Level.

技术参数 Specification

外尺寸outside size(mm)	7040X5500X3450
内尺寸Inside Size(mm)	6900X4000X2650
大门尺寸Main door size (mm)	3000X700
总功率Total Power(KW)	17.7

Spray Booth 水性油漆专用 Water-base Paint Special

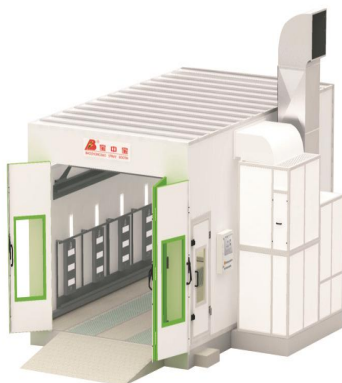

产品详情 Details:

- ◆ 适合水性漆涂装作业, 墙板厚为: 70mm, 两台4kw的送风机, 风量: 25000m³/h; 一台7.5kw的排风机, 风量: 20000m³/h;
- ◆ 采用活性炭过滤废弃, 废气排放达到国际标准。
- ◆ Suit for water-base paint.Wallboard:70mm thick.Two 4kw of Inlet Fan, capacity:25000m³/h. One 7.5kw of outlet fan, capacity:20000m³/h.
- ◆ Multi-layer fiberglass filter, active-carbon. Achieve international Level.

技术参数 Specification

外尺寸outside size(mm)	7040X5690X3450
内尺寸Inside Size(mm)	6900X4000X2750
大门尺寸Main door size (mm)	3000X2700
总功率Total Power(KW)	23.4

产品介绍 PRODUCT INTRODUCTION 1-2

Spray Booth BZB-8200(920)



产品详情 Details:

- ◆ 墙板厚为: 50mm, 两台4kw的送风机, 风量: 24000m³/h, 最高温度: 80℃, 升温速度: 4-6min (20-60℃)
- ◆ Wallboard:50mm thick.Two 4kw of Inlet Fan, capacity:24000m³/h. Max.temperature:80℃, Heating rate:4-6min(20-60℃)

技术参数 Specification

外尺寸outside size(mm)	7000X5560X3430
内尺寸Inside Size(mm)	6900X4000X2750
大门尺寸Main door size (mm)	3000X2700
总功率Total Power(KW)	10

Spray Booth BZB-8400(930)



产品详情 Details:

- ◆ 墙板厚为: 50mm, 两台4kw的送风机, 风量: 24000m³/h; 一台7.5kw的排风机, 风量: 20000m³/h;
- ◆ 采用活性炭过滤废弃, 废气排放达到国际标准。
- ◆ Wallboard:50mm thick.Two 4kw of Inlet Fan, capacity:24000m³/h. One 7.5kw of outlet, Capacity:20000m³/h.
- ◆ Multi-layer fiberglass filter, active-carbon. Achieve international Level.

技术参数 Specification

外尺寸outside size(mm)	7000X5560X3430
内尺寸Inside Size(mm)	6900X4000X2750
大门尺寸Main door size (mm)	3000X2700
总功率Total Power(KW)	16



电加热专业汽车烤漆房 Electrical Heating Spray Booth

技术参数 Specification

内部尺寸 Inside Dimension(mm)	内部尺寸 Inside Dimension(mm)	最大工作温度 Maximum working temperature(°C)	总功率 Total Power(KW)
7000*5560*3430	6900*4000*2650	3000	50.5

两台4kw的送风机,总送风量:24000m³/h,最大工作温度:80°C,升温速度:15-20秒,加热系统:42kw.
Two 4kw of Input Fan, total capacity: 24000m³/h, Max. Working temperature: 80°C, heating rate: 15-20min, Heating sys.: 42kw.

大巴烤漆房 Bus Spray Booth >>>



技术参数 Specification

尺寸可特定 Size Can Be Customized.

型号 Model	内部尺寸 Inside Dimension(mm)	外部尺寸 Outside Dimension(mm)	最大工作温度 Maximum working temperature(°C)	总功率 Total Power(KW)
BH-1245	12000*4500*4000	12144*6396*4600	80°C	44
BH-1550	15000*5000*5000	15144*6896*5600	80°C	59.5
BH-1850	18000*5000*5000	18144*6896*5600	80°C	75.5



技术参数 Specification

内部尺寸 Inside Dimension(mm)	6300*3450*2700(L*W*H)
外部尺寸 Outside Dimension(mm)	7550*3550*3100(L*W*H)
排风能力 Exhaust air fan capacity(m³/h)	15500
空载运行速度 No-Load Air Speed(m/s)	≥0.2
换气频率 Frequency of air Exchange(times/h)	264
空气过滤效率 Air filter Efficiency(%)	≥95%
噪音 Noise(db)	<80
总功率 Total power(kw)	6.7



1. 可移动式, 全自动控制, 经济型无尘干磨系统(V7)/(V5)
2. 高效无尘打磨解决方案, 可移动式工作站, 适应工作场地的变动, 可让喷漆前的打磨工作效率提高: 70%
1. Removable, full automatic, Economical sanders with dust extraction system (V7)/(V5) High efficiency, dust-free solution, movable work stations, can adapt workplace change. The work efficiency increased by 80%/70%

无尘干磨系统 (V9/V7/V5)

Sanders with dust extraction system



技术参数 Specification

电压 Voltage	220V/50Hz
功率 Power	2500W 2 motor
积尘量 Amount of dust	230m³/h
集尘桶容量 Capacity	60L
集尘管长度 Pipe length	7.5m
工作气压 Working pressure:	10Mpa

技术参数 Specification

电压 Voltage	220V/50Hz
功率 Power	1300W 1 motor
积尘量 Amount of dust	150m³/h
集尘桶容量 Capacity	30L
集尘管长度 Pipe length	5m
工作气压 Working pressure:	8Mpa




广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd

大梁校正仪

Auto Collision Repair System

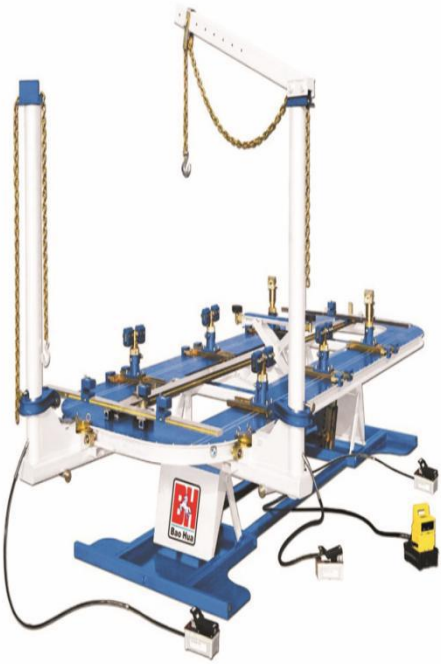

技术参数Specification

型号Model	W-8
工作台长度Working-bench Length	6300mm
工作台宽度Working-bench Width	2000mm
工作台高度Working-bench Height	300-1200mm
设备总重Equipment Overall Weight	3500kg
液压系统最大工作压力Hydraulic Power	69MPa
拉塔牵引最大拉力Power Pulling capacity	98000N
拉塔工作范围Radius of Pulling	360°
二次举升量Secondary Lifting Capacity	5T
二次举升高度Secondary Lifting Height	500mm
工作台最大举升重量Lifting Capacity	7000Kg



W-8性能 Function

- 1.高精度大型工作台，双剪式整体垂直升降，同时可单边倾斜上车，给您的维修提供一款多用的平台
- 2.工作台垂直升降，高度可在300-1200mm之间根据修理的需要任意调整。
- 3.移动液压牵引拉塔，可设工作360°作业，拉力强劲，其独特的拉塔固定方式可靠无死点。
- 4.负载可调节通用夹钳，三组可调支点可满足任何变形车辆的校正。
- 5.由气动装置控制的机械自锁机构可以实现远距离操作工作台的升降安全可靠，并可延长举升油缸的使用寿命。
- 6.采用移动的三维坐标测量系统测量准确，操作简单，工作效率高。
- 7.可移动式二次举升确保上车及修理更加方便快捷。
- 8.原装进口液压泵站及元件动力强劲，性能可靠，可大大提高使用寿命及工作效率。
- 9.配备顶部和底部拉伸装置，以实现车辆的全方位拉伸操作。

1. High-precision working bench, double-scissor lifts vertically rising provides you a multi-use working bench for repairing.
2. The working-bench goes up and down vertically, the height is adjustable arbitrarily according to the need for repairing among 300-1200mm. It is more convenient for the vehicle to put on the shelf.
3. Movable hydraulic pressure drawing-tower, can work along working bench 360°, has powerful pulling force. The unique way of the draw tower fixture is convenient and reliable.
4. Load adjustable common jigs three-dimension adjustable, can meet the demand of the fixture of all cars that out of shape, three doesn't need the jigs for the vehicle putting on and down the shelf.
5. By air operated machinery self-lock device since, can realize remote-controlled operation, make the rising or falling of the working bench safe and reliable, and can lengthen the service life of the cylinder of lifting.
6. Three-dimensional laser measuring system, can make measurement and repairing at the same time, thus make the working process flexible, accurate, swift and high-efficient.
7. Movable secondary-lifting ensure the getting on the vehicle and repairing more convenient and swifter.
8. Imported hydraulic system, with its strong pulling and reliable performance, can lengthen life and improve working efficiency.
9. Allocating top and bottom draw device, in order to realize the omni-direction of drawing and operating for the vehicle.


产品介绍 PRODUCT INTRODUCTION

5-6

CRE-V

技术参数Specification


型号Model	CRE-V
工作台长度Working-bench Length	5328mm
工作台宽度Working-bench Width	2000mm
工作台高度Working-bench Height	300-610mm
设备总重Equipment Overall Weight	2490Kg
液压系统最大工作压力Hydraulic Power	69MPa
拉塔牵引最大拉力Power Pulling capacity	98000N
拉塔工作范围Radius of Pulling	360°
气源压力要求Air supply Required	100PSI
工作台最大举升重量Lifting Capacity	4000Kg

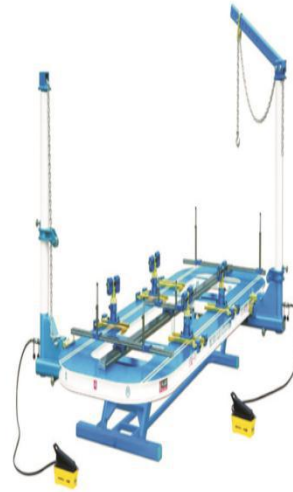

CRE-B

技术参数Specification

型号Model	CRE-B
工作台长度Working-bench Length	5180mm
工作台宽度Working-bench Width	2000mm
工作台高度Working-bench Height	530mm
设备总重Equipment Overall Weight	2200Kg
液压系统最大工作压力Hydraulic Power	69MPa
测量系统精度Measuring Accuracy	±2mm
拉塔工作范围Radius of Pulling	360°
气源压力要求Air supply Required	0.6-0.8MPa
工作台最大举升重量Lifting Capacity	4T

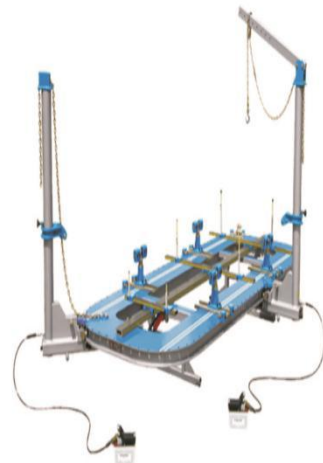

CRE-900

技术参数Specification

型号Model	CRE-900
工作台长度Working-bench Length	4200mm
工作台宽度Working-bench Width	900mm
工作台高度Working-bench Height	390mm
设备总重Equipment Overall Weight	1335Kg
液压系统最大工作压力Hydraulic Power	69MPa
拉塔工作范围Radius of Pulling	360°
气源压力要求Air supply Required	100PSI





广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd



3D四轮定位仪 Wheel Alignment Series >>>>

>>>> 您身边的汽车维修专家

1. 与世界同步推出500万像素数码相机,突破国内同类产品像素低的局限,攻克高清晰图像采集后软件计算处理技术的难关,成像更加清晰,测量更加精准。
真实的动态测量技术:采用公司独创核心技术,真实模拟与计算车辆的运动轨迹,不受推举距离长短及方向盘角度数的限制,推车、采集图像和软件计算同时进行,简化推车过程,提高测量效率。

1. With protrusive Five million pixel camera synchronously and breakthrough the congenic product which is low pixels. High-end software make high quality picture and more accuracy.
2. Truly dynamic measure technology use core technology to simulate and compute the run program of mobile vehicle. Unstacked the distance of trolley or degree of steering wheel limited. The trolley, image acquisition/compute software can work all at once which is easy working but high efficiency.

A-350



精准度Accuracy 范围Range

显示精度Display Accuracy	1' / 0.1mm
外倾角Camber	±2' ±10°C
主销后倾角Caster	±6' ±10°C
主销内倾角K.P.I	±2' ±20°C
前束角Toe	±2' ±20°C
退缩角Setback	±2' ±5°C
推进角Thrust angle	±2' ±5°C
轮轴距Track width	±2mm 1800mm
轴轴距Wheelbase	±2mm 3300mm

A-380



A-330



MILLER From France

最新版米勒3D定位软件,操作更方便。
系统有开机自动测光,自动最优成像功能。
可测超低底盘车辆及“大包围”车辆。
配32寸超大显示屏,计算机和打印机内置,配置豪华,外形气派,不占用场地。
系统支持使用简易靶标靶定相机安装,方便用户现场维护相机(独特优势)。
系统有多种提示功能,内置电子说明书、常规调车动画提示、基础培训内容。
The latest edition of MILLER 3D wheel alignment software.
Users could maintain camera easily by equipped target(Special advantage.)
Automatic metering and optimal imaging function can maximize convenience for users.
Measurement for the toe-in curve and ultra-low chassis vehicles.
With 32" LCD screen, built-in computer and printer.
With variety of tips, the built-in electronic manual, routine adjustment animation tips, training content.

CCD大车四轮定位仪 CCD Truck/Bus Wheel Aligner

	精准度Accuracy	范围Range
各轴(桥)车轮总前束Total Toe-in	±10°C	±2'
各轴(桥)单轮前束Single Toe-in	±5°C	±1'
车轮外倾角Camber	±10°C	±1'
转向轮主销后倾角Caster	±25°C	±3'
转向轮主销内倾角K.P.I	±25°C	±3'
20度反前束20° Toe-in	±5°C	±3'
可测轴数Measurable Axes	多轴	
可测车辆长度Measurable vehicle length	14m	



多功能铝车身专用修复机

Multifunctional Aluminium Dent Pulling Machines

型号Model FY-80L FY-60L

输入电压Input Voltage: AC220V/380V/400V 50/60Hz 1-Ph
额定功率Rated Power: 2.0KVA 1.5KVA
配用保险丝Fuse: 4-10A
绝缘等级Insulation Grade: H
电容容量Capacitance: 90000UF 66000UF
空载电压No-load Voltage: 135-400V 60-200V
焊接螺钉尺寸Spottable Stud Diameter: $\phi 4-\phi 10\text{mm}$ $\phi 4-\phi 6\text{mm}$
暂载率Duty Cycle: 80%



多功能IGBT逆变铝车身钣金修复机

Multifunctional IGBT Inverter Aluminium Dent Pulling Machines

型号Model FY-65L

输入电压Input Voltage: AC220V 50/60Hz 1-Ph
额定功率Rated Power: 3KVA
配用保险丝Fuse: 4A
绝缘等级Insulation Grade: H
逆变Inverter: IGBT
焊接模式Welding Mode: 电焊式 Dent Pulling
空载电压No-load Voltage: 50-150V
焊接螺钉尺寸Spottable Stud Diameter: $\phi 3-\phi 6\text{mm}$
暂载率Duty Cycle: 80%



多功能IGBT逆变铝车身焊机

Multifunctional IGBT Inverter Aluminium MIG Welder

型号Model: FY-200L FY-230L FY-323L

输入电压Input Voltage: 400V or 230V AC220V
额定输入功率Rated Input Power: 10.5KVA 6.2KVA
额定输入电流Rated Input Current: 15A
输出电流电压Output Current/Power: 35A/15.7V-310A/31V
10A/10.4V-230A/18V
暂载率Duty Cycle: 220A/100%-310A/65% 220A/60%-155A/100%
输出空载电压No-load Output Voltage: 50V 44V
频率Frequency: $\geq 90\%$ $\geq 80\%$
送丝机构Wire Feeder: 四轮驱动 Four-roll Drive



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd

产品介绍 PRODUCT INTRODUCTION

11-12



多功能二合一钣金修复机

Multifunctional Dent Puller and MIG welder Machines Two In One

型号Model FY-8000-250

输入电压Input Voltage: 220V or 380V 50/60Hz
输入功率Input Power: 21KVA
输入电流Input Current: 55A
最大电流Max. Current: 5400A
输出电压Output Voltage: 1-13V
单面焊接厚度Single Side Welding Thickness: 0.8-1.3mm

输入功率Input Power: 16.8KVA 输入电流Input Current: 12.5A
最大电流Max. Current: 35A/17V-250A/26.5V 暂载率Duty Cycle: 35%
空载电压No-load Voltage: 20-37V
一元对应丝直径Diameter: ϕ 0.8-1.0mm



等离子切割机 Inverter Air Plasma Cutter

型号Model: TIG200SII ARC160II CUT40II

型号Model: FY-2012S

输入电压Input Voltage: AC220V-380V 1P
额定输入电源容量Rated Input Power Capacity: 4.8KVA
空载电压No-load Voltage: 230V
输出电流调节范围Output Current Range: 10-40A
额定输出电压Rated Output Voltage: 96V
空载损耗No-load Loss: 40W
绝缘等级Insulation Class: B



保险杠修复机 Bumper Repair Machines >>>>

输入电压Input Voltage: AC200-240V 输入电流Input Current: 1.5A
输出电压Output Voltage: 2.6V 输出电流Output Current: 5-30A

<<<<多功能数字钣金修复机

Multifunctional Digital Dent Pulling Machine

专业级汽车钣金维修系统 >>>>

Car Body Repair System

FY-9028 型号Model: FY-96 FY-86
FY-9018 型号Model: FY-76 FY-66

输入电压Input Voltage: 220V or 380V 50/60Hz or 220V/380V
输入功率Input Power: 22KVA 21KVA 20KVA 18KVA
输入电流Input Current: 57A 55A 51A 50A
最大电流Max. Current: 5800A 5400A 5200A 5000A
输出电压Output Voltage: 1-13V
单面焊接厚度Single Side Welding Thickness: 0.8-1.2mm 0.8-1.0mm



FY-160C
FY-180C



多功能IGBT逆变电阻焊机

Multifunctional IGBT Inverter Resistance Spot Welder

输入电压Input Voltage: AC 380V 50/60Hz
输入功率Input Power: 30KVA
最大输出功率 Max. Output Power: 80KVA
输入电流Input Current: 32A
最大电流Max. Current: 16000A

输入电压Input Voltage: 3P AC400V 50/60Hz
输入功率Input Power: 30KVA
输入电流Input Current: 38A
最大电流Max. Current: 16000A
单面焊接厚度Single Side Welding Thickness: 1.0+1.5mm
双面焊接厚度Double Side Welding Thickness: 3.0+3.0+3.0mm

FY-13000
FY-15000



多功能C型电阻点焊 钣金修复机

Multifunctional Resistance Spot Welding Sys. With C-Type Gun.

输入电压Input Voltage: AC380-440V 50/60Hz
输入功率Input Power: 30KVA
输入电流Input Current: 60A
最大电流Max. Current: 13000A / 15000A
输出电压碳棒加热Heating Voltage Of Carbon Rod: AC6-10V
输出电压分子熔值Value of Meson Melting: AC1-12V
输出电压碳焊Output Voltage Butt-Joint: AC1-13V
单面焊接厚度Single Side Welding Thickness: 1.0+1.5mm
双面焊接厚度Double Side Welding Thickness: 3.0+3.0mm/3.0+3.0+2.0mm
电极最大焊接点Max. Electrode Welding Point: 7mm

FY-9900



气动双面点焊-多功能钣金修复机

Multifunctional Resistance Spot Welding Sys. With Pneumatic Double-Side Welding Gun For Collision Repair.

输入电压Input Voltage: AC380V-400V 50/60Hz
输入功率Input Power: 26.8KVA
输入电流Input Current: 60A
最大电流Max. Current: 9900A
输出电压碳棒加热Heating Voltage Of Carbon Rod: AC6-10V
输出电压分子熔值Value of Meson Melting: AC1-12V
输出电压碳焊Output Voltage Butt-Joint: AC1-13V
单面焊接厚度Single Side Welding Thickness: 1.0+1.5mm
双面焊接厚度Double Side Welding Thickness: 2.5+2.5mm
电极最大焊接点Max. Electrode Welding Point: 7mm



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd



IGBT逆变钣金修复机

IGBT Inverter Dent Pulling Machines

型号Model

FY-85A FY-86A FY-87A FY-88A

输入电压Input Voltage: AC220V/AC380V 50/60Hz
 输入功率Input Power: 4KVA 4.8KVA 6KVA 6.4KVA
 输入电流Input Current: FY-85A:16A/6A FY-86A:16A/7A
 FY-87A:25A/9A FY-88A:25A/11A
 最大电流Max.Current: FY-85A:1000A FY-86A:12000A
 FY-87A:15000A FY-88A:16000A
 单面焊接厚度Single Side Welding Thickness: FY-87A:0.8+1.0mm
 FY-88A:0.8+1.2mm



多功能数字化钣金修复机

Multifunctional Digital Dent Pulling Machines

型号Model

FY-6L FY-7L

输入电压Input Voltage: 220V/380 50/60Hz 220V or 380V
 输入功率Input Power: 19KVA 20KVA 21KVA
 输入电流Input Current: 50A 51A 55A
 最大电流Max.Current: 5000A 5200A 5400A
 输出电压Output Voltage: 1-13V
 单面焊接厚度Single Side Welding Thickness: 0.8+1.0mm 0.8+1.2mm
 定时工作时间Welding Time: 0-99S



多功能汽车钣金修复机

Multifunctional Digital Car Body Repair Machines

型号Model

FY-6000 FY-7000 FY-8000 FY-9000

输入电压Input Voltage: 220V or 380V 50/60Hz
 输入功率Input Power: 19KVA 20KVA 21KVA 22KVA
 输入电流Input Current: 50A 51A 55A 57A
 最大电流Max.Current: 5000A 5200A 5400A 5800A
 输出电压Output Voltage: 1-13V
 单面焊接厚度Single Side Welding Thickness: 0.8+1.0mm 0.8+1.2mm
 定时工作时间Welding Time: 0-99S
 工作档位Working Reg: 无级可调Stepless



二氧化碳半自动焊接中心

MIG Semi-Automatic Gas Shielded Welding Machine

型号Model: FY-42002E

输入电压Input Voltage: AC 230-400V Single-phase
 频率Frequency: 50/60Hz
 额定最大输入电流Rated maximum supply current: 12.8A
 最大有效输入电流Maximum effective supply current: 9.8A
 输出电流电压Output current/voltage: 35A/17V - 220A/25V
 空载电压No-load voltage: 20-31A
 焊接电流Welding current range: 3S-220V
 暂载率Duty cycle: 35%
 绝缘等级Insulation grade: F
 一元对应焊丝直径Weldable wire: Low Carbon Steel Solid Φ 0.8, 1.0mm
 电压调节级数Voltage regulation range: 6 Steps



高效节能数字IGBT逆变脉冲焊接中心

Energy Efficient Digital IGBT Inverter Pulsed MIG Welder

型号Model: FYM165300

输入电压Input Voltage: 220V or 380V
 最大额定输入功率Max rated input power: 10KVA
 最大额定输出电流Max rated output current: 15A
 最大输出电流Max output current: 30-300A
 输出电压Max output voltage: 15.7-31V
 输出空载电压Output voltage: 50V
 暂载率No-load output voltage: 65%
 效率Duty cycle: >90%
 功率因数Efficiency: >0.95
 钢材焊丝直径Steel wire diameter: Φ 0.6-1.2mm
 铝合金焊丝直径Alu alloy wire diameter: Φ 0.8-1.2mm
 铜合金焊丝直径Copper alloy wire diameter: Φ 0.6-1.4mm



便携式IGBT逆变焊接中心

Portable IGBT Inverter MIG Welder

型号Model: FYM16180

输入电压Input Voltage: 230V
 最大额定输入功率Max rated input power: 5KVA
 最大额定输入电流Max rated input current: 8.3A
 最大输出电流Max Output Current: 30-180A
 输出电压Output Voltage: 15.2-28V
 输出空载电压Output voltage: 50V
 暂载率No-load output voltage: 65%
 效率Duty cycle: >90%
 功率因数Power factor: >0.95
 钢材焊丝直径Steel wire diameter: Φ 0.6-0.8mm



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd



型号Model
FY-3W / FY-6W


- 适用电源Power Supply: 200V-400V 50/60Hz 3x1100W / 6*1100W
- 烘烤面积Curing Distance: 1200x1000mm / 1800*1000mm
- 温度Working Temperature: 40°C-75°C / 40°C-100°C

1分钟快速烘干

Fast Drying Type



- 型号Model: FY-1UV
- 电压Input Power: AC200-240V 50/60Hz
- 功率Power: 1800W
- 烤漆面积Curing distance: 80-200mm (Adjustable)

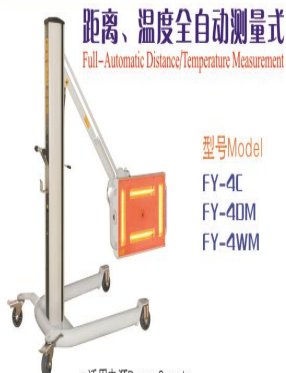

距离、温度全自动测量式

Full-Automatic Distance/Temperature Measurement

型号Model
FY-4C
FY-4DM
FY-4WM

- 适用电源Power Supply: 200V-400V 50/60Hz 4x1000W
- 烘烤面积Curing Distance: 1200x1000mm
- 温度Working Temperature: 40°C-100°C



距离、温度全自动测量式

Full-Automatic Distance/Temperature Measurement

型号Model
FY-8CMF
Y-8DMF
Y-8WM

- 适用电源Power Supply: 200V-400V 50/60Hz 8x1000W
- 烘烤面积Curing Distance: 2000x1100mm
- 温度Working Temperature: 40°C-100°C

型号Model
FY-2HX



- 适用电源Power Supply: AC200-240V 50/60Hz
- 烘烤面积Curing Distance: 800x800mm
- 温度Working Temperature: 30°C-100°C (Adjustable)

型号Model
FY-2A



- 适用电源Power Supply: AC200-400V 50/60Hz 2000W
- 烘烤面积Curing Distance: 800x800mm
- 温度Working Temperature: 40°C-100°C (Adjustable)

便携式充电机

Portable Battery Charger

型号Model
FY-50A FY-30A



具有快速充电及慢速充电功能
可一次给多个电池充电
自动识别12V或24V的电池
自动识别电池容量
电池充满电自动停止
具有正负极短路自动保护功能
Fast/Slow charge settings for safe reliable charging. Charging more than one battery at the same time is available. Automatic recognition of 12V/24V battery. And recognition of battery capacity. Automatic stop charging when the battery is fully charged. Shorts circuit protection against reverse polarity.

工具车选配

Tools Cabinet Optional

启动充电机

Motor-Start Type

型号Model:
FY-3600 FY-2000 FY-1600
FY-1400 FY-1000



输入电压Input Voltage: AC380V 3PH
AC220V/380V 1PHH
功率Power: 1.45/25KVA 2.5/20KVA
2/16KVA 1.4/11KVA 1/9.2KVA
充电电压Charging Voltage: 12/24V
启动瞬间电流Maximum Starting Current:
3600A 1800A 1500A 1250A 500A

逆变节能环保型充电机

Green & Efficient Inverter Battery Charger

型号Model: FY-3000CB



输入电压Input Voltage: AC220-240V
功率Power: 1000W
输出功率Output Power: 12VDC 70A
充电电压Charging Voltage: 12/24V
编程模式Program Mode: 2-30V/2-70A

充电机

Battery Charger

型号Model
FY-850 FY-650



输入电压Input Voltage: AC220V
功率Power: 0.95/8.6KVA 0.8/8.2KVA
充电电压Charging Voltage: 12/24V
启动瞬间电流
Maximum Starting Current: 430A 335A

逆变智能编程充电电源充电机

Inverter Intelligent Programming Charger Power Supply/Battery Charger

型号Model:
FY-70AL-12HF
FY-50AL-12H

输入电压Input Voltage: AC220-240V 50/60Hz
输入功率Input Power: 1100W 800W 500W
最大有效电流Max Current: 70A 50A 30A
充电电压Charging Voltage: 12V
编程模式Program Mode: 2-30V/2-70A
电池容量Capacity: 10-1000Ah/600Ah/400Ah



型号Model:

FY-100A-24/12HF
FY-70A-24/12HF
FY-50A-24/12HF
FY-100A-12HF
FY-70A-12HF
FY-50A-12HF



输入电压Input Voltage: AC220-240V 50/60Hz
输入功率Input Power: 2700W 1900W 1450W
1500W 1100W 800W
最大有效电流Max Current: 100A 70A 50A
充电电压Charging Voltage: 12V/24V
编程模式Program Mode: 2-50V/2-70A/2-100V



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd

3吨超薄剪式举升机BL-6106 >>>>

3T Full Rise Scissor lift

举升重量Load capacity	3T
马力Horse power	2HP
功率Power	2.2kw
电压Power supply	AC380V/220V 50Hz/60Hz
举升高度Max. lifting height	105 - 1900 (mm)
举升时间Raise Time	45s
重量Weight	500KG



超薄四轮定位仪大剪BL-6108C

Super-thin car lift for wheel alignment



型号Model	BL-6108C
举升重量Load capacity	3.5T
马力Horse power	3HP
功率Power	2.2kw
电压Power supply	AC380V/220V 50Hz/60Hz
最大举升高度Max. lifting height	1800 (mm)
二次举升高度Clear Lifting Height	500mm
举升时间Raise Time	45s
举升高度Total height	1930mm
重量Weight	2200kg

四轮定位子母大剪BL-6108 >>>>

SCISSOR LIFT SPECIAL FOR WHEEL ALIGNMENT SYSTEM

型号Model	BL-6108
举升重量Load capacity	3.5T/4.5T
马力Horse power	4HP
功率Power	2.2kw
电压Power supply	AC380V/220V 50Hz/60Hz
最高举升高度Max. lifting height	2000 (mm)
举升时间Raise Time	45s
重量Weight	2200kg



地坑式剪式举升机

In-ground mounted type scissor lift



型号Model	BL-6105
举升重量Load capacity	3T
马力Horse power	2HP
功率Power	1.5kw
电压Power supply	380V/220V 50Hz/60Hz
最大举升高度Max. lifting height	1800 (mm)
举升时间Raise Time	Approx. 45sec
重量Weight	600kg

可移动剪式举升机 >>>>

BLM-6270 (Removable scissor lift)

型号Model	BLM-6270
举升重量Load capacity	2.8T
马力Horse power	2HP
功率Power	1.5Kw
电压Power supply	380V/220V 50Hz/60Hz
举升高度Max. lifting height	110-1300mm
举升时间Raise Time	Approx. 45sec
重量Weight	300kg



简易、龙门举升机

Two Post Car Lift



电动解锁+ 24V电控盒
机械、液压双保险
铝壳电机、出口液压油
Electrical Release Explosion-proof Valve
Aluminium Motor To Avoid Damage By Heat.
With Multifunctional Hydraulic Valve Board,
Can Be Released When Power Down.



举升重量Lifting Capacity:3600KG /4200KG
举升高度Lifting Height: 1850mm
举升时间Lifting Time:50s
电压Voltage: 220V/240V/380V/415V, 1/3PH
功率Power:18Mpa/2.2Kw
柱间距离Inside Width:2850mm
立柱高度Post Height:2824mm

型号Model
FL-8223E
FL-8224E

举升重量Lifting Capacity:3600KG /4200KG
举升高度Lifting Height: 1930mm
最小举升高度Min.Height: 90mm
举升时间Lifting Time:50s
电压Voltage: 220V/240V/380V/415V, 1/3PH
功率Power:18Mpa/2.2Kw
柱间距离Inside Width:2850mm
立柱高度Post Height:2824mm

型号Model
FL-8213E
FL-8214E



FL-8806

举升重量Lifting Capacity:4200KG
举升高度Lifting Height: 2000mm
平台长度Length:4800mm
举升时间Lifting Time:50s



FL-8801 >>>>

举升重量Lifting Capacity:3000KG
举升高度Lifting Height: 1830mm
高地最低高度Min.Height: 110mm
电压Voltage: 220V/240V/380V/415V, 1/3PH
功率Power:18Mpa/2.2Kw

FL-8804R

举升重量Lifting Capacity:3500KG
举升高度Lifting Height: 1600mm
总长度Total Length:5580mm
总宽度Total Width: 3340mm
电压Voltage: 220V 1ph/380V 3ph
举升时间Lifting Time: 45-55S



FL-8802 >>>>

举升重量Lifting Capacity:3000KG
举升高度Lifting Height: 1800mm
高地最低高度Min.Height: 270mm
电压Voltage: 220V/380V
气源压力Air Supply: 6-8Kg/CM²
举升时间Lifting Time: 50S







广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd

产品介绍 PRODUCT INTRODUCTION

19-20

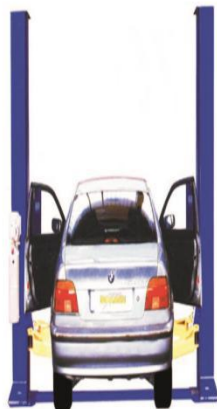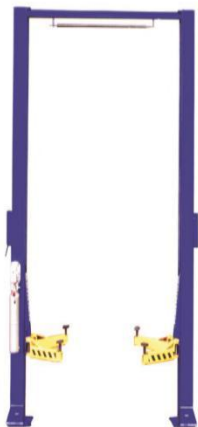

技术参考Specification

型号Model	M2-7CA	M2-9CA	M2-10
举升重量Lifting Capacity	3200Kg	4000Kg	4500Kg
举升高度Lifting Height	1850mm		
举升时间Lifting Time	50S		
总高Height	3700mm		
总宽Width	3300mm	3300mm	3695mm
柱间宽度Column Width	2720mm	2720mm	3050mm
车道宽度Lane Width	2425mm	2425mm	2755mm
最低高度Minimum Height	101mm		
电源Power Supply	220V/380V		
净重Net Weight	680Kg	700Kg	850Kg

技术参考Specification

型号Model	M2-7A	M2-9A	M2-10
举升重量Lifting Capacity	3200kg	4050Kg	4500Kg
举升高度Lifting Height	1850mm		
举升时间Lifting Time	50S		
总高Height	2900mm		
总宽Width	3300mm	3300mm	3690mm
柱间宽度Column Width	2720mm	2720mm	3050mm
车道宽度Lane Width	2425mm	2425mm	2755mm
最低高度Minimum Height	101mm		
电源Power Supply	220V/380V		
净重Net Weight	650Kg	670Kg	800Kg



技术参考Specification

型号Model	举升重量Lifting capacity	举升高度Lifting Height	举升时间Lifting Time	总长Length	总宽Width	柱间宽度Column Width	跑道宽度Runway Width	电源Power	毛重G.W
H4-9A	4000KG	1829mm	60S	5037mm	3162mm	2473mm		220V/380V	1100KG
H4-12	5500KG	1829mm	75S	5969mm	3467mm	3050mm	508mm		1300KG
H4-12A	6000KG	1829mm	75S	7290mm	3658mm	3173mm			1600KG
H4-35	16000KG1	1542mm	75S	8814mm	3658mm	3173mm	610mm		3130KG

四柱举升机
Four Post Lift 20T/30T



您身边的汽车维修专家!

技术参数Specification

型号Model	BL-20-4/BL-30-4/BL-30-6
举升高度Lifting Travel	5-1700 mm (1/4'-66'-7/8')
单柱举升重量Each Lifting Capacity	5T/7.5T
额定举升/降落时间Lifting/Lowering Time at Rated Load	95 / 60 sec
前轮最大地面压力Max. Floor Surface Pressure(Per Front Wheel)	3200 kg (7000lbs)
总高度Height Overall	3050 mm (88'-1/2")
总宽度Width Overall	1120 mm (44'-1/8")
柱间最大距离Max. Distance Between Lifting Columns	9 m (29'-1/2")
工作电压Operation Voltage	380V
噪音Noise Level	Max 73db (A)
单柱净重Each Net Weight	700 kg (1500lbs)
20尺集装箱数量Quantity in 20' Container	8 units
40尺集装箱数量Quantity in 40' Container	16 units
包装尺寸Packing Size	1406 x 1120 x 2250 mm (55'-3/8' x 44'-1/8' x 88'-5/8')





广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd



汽车喷油嘴智能清洗检测仪 Vehicle Intelligent Injector Cleaner & Tester

转速范围Range: 0-7500/min
脉宽Plus width: 0-20ms步长0.1ms
计时Timing: 0-10min可调
系统压力Pressure: 0-0.6Mpa可调
电源Power: AC220V±10%50/60HZ
工作温度Temperature: 10°C-40°C
超声波清洗功率Voltage: 700W

燃油系统清洗机 Fuel Injector Cleaner

动力来源Driving force
气动 (air) / 电动 (electric) DC 12V
工作压力 (pressure) : 0-120PSI



润滑系统免拆清洗机 Lubrication Systems Cleaner

动力来源(Driving force):
气动/电动(Electric) DC 12V
工作压力(Pressure): 60PSI

自动变速箱清洗机 Automatic gearbox cleaner

动力来源 (driving force) :
电动 (electric) DC 12V
工作压力 (pressure) 60PSI
重量 (weight) 45kg
尺寸(size) 500*650*1100



冷却系统免拆清洗机 A/C Sys. Cleaner

动力来源 (driving force) :
气动/电动(electric)AC220V 50HZ
工作压力 (pressure) : 60PSI
重量 (weight) : 38kg
尺寸 (size) : 365*445*940

刹车油更换机 Brake fluid replacement machine

动力来源 (driving force) :
气动 (air) / 电动 (electric) DC 12V
工作压力 (pressure) : 0-120PSI
重量 (weight) : 40kg
尺寸 (size) : 365*445*940



燃油系统深化保养系列 Fuel System Maintain Series

动力方向机油更换机 Power direction oil replacement machine

动力来源 (driving force) :
气动 (air) / 电动 (electric) DC 12V
工作压力 (pressure) : 0-120PSI
重量 (weight) : 40kg
尺寸 (size) : 365*445*940



全自动智能氮气充气机

Full Automatic Intelligent Digital Tire Nitrogen Producing/Inflator

技术参数Specification

型号Model	FS-3600(半自动Semi-Automatic)	FS-4000(全自动Full-Automatic)	FS-6000(大车Truck)
氮气纯度Nitrogen Purity	95-99.5%	95-99.5%	95-99.5%
电压Power supply	110V/220V/50-60Hz	AC110V/220V/50-60Hz	AC110V/220V/50-60Hz
功率Power	60W	60W	60W
氮气释放率 N2 Output	66L/min(2.3cfm)@ 145psi/10bar	66L/min(2.3cfm)@ 145psi/10bar	100L/min(3.5cfm)@ 145psi/10bar
空压释放范围 Air Output range	≤174Psi/12Bar	≤174Psi/12Bar	≤174Psi/12Bar
氮气储存容量 Nitrogen Storage Tank	70L/18.5gal	70L/18.5gal	120L/31.8gal
净重Net Weight	81KG	129KG	155KG



全自动智能数据轮胎充气放气压力测试机

Full Automatic Intelligent Digital Tire Inflation/Deflation/Pressure testing Machine

MODEL: BN-302/BN-301

技术参数Specification

电压Power Supply	AC220V 50Hz
功率Power	40W
工作温度Working Temperature	-20°C - 70°C
输入气压Input Air Pressure	0-145psi (0-10bar)
输出气压Output Pressure	65psi (Safety pressure)
检测范围Testing Range	5-65psi (0.4-4.5bar)
准确度Accuracy	±1%+0.5psi

便携式轮胎充气泵 >>>>>

Portable tire inflator pump

电压Power Supply: 3V (1.5V*2)
测试范围Testing Range: 0.4-6.8 Bar/5-100psi
精度Accuracy: ±1% + 0.5psi
工作温度Working Temp: -18°C - 44°C
差异Differentiation: 0.05Bar/0.725Psi



LCD智能液晶显示轮胎充气枪

LCD Digital Tire Inflation Gun

- *Easy operation
- *Convenience and easy handle
- *Ensure safety
- *The unique design



四合一汽车检测线 4in 1 vehicle test line



技术参数Specification	KPB-3
最大承载重量Max. Load Capacity	3500Kg
最大允许负荷Max. Permissible Load	3000Kg
电机电源Motor Power	三相3Ph 380V-420V 50HZ
工作环境温度Working Temperature	0-40°C
工作环境湿度Working Humidity	≤90%
外形尺寸Overall Dimension	2390*1720*325mm
设备重量Machine Weight	500Kg

马力测功机 Horsepower Machine

4 drive AWD



2 drive AWD



4 drive AWD 2 drive AWD

最大测试速度 The maximum test speed (km/h)	250	250
最大测试功率 Maximum test power (kW)	900	450
最大测试功率 Max. Test Power (HP)	1206	603
最大测试功率 Max. Test Power (PS)	1224	612
最大单轴负载 Maximum uniaxial load (kg)	2000x2	2000
最大连续加载时间 Maximum continuous load time (min)	30	15
电涡流最大传输力矩		
Eddy current maximum transmission torque (Nm)	11500x2	11500
车速示值误差 Speed indication error	≤ ± 1%	≤ ± 1%
扭矩示值误差 Torque indication error	≤ ± 2%	≤ ± 2%
功率示值误差 Power indication error	≤ ± 3%	≤ ± 3%
设备重量 Equipment weight (kg)	1800	720
前后滚筒轴 Front and rear drum Wheelbase (mm)	430	430
车轮直径范围 Wheel diameter range (mm)	500-800	500-800
电源电压 Supply Voltage AC	220V, 50Hz	220V, 50Hz
风机电压 Fan voltage AC	380V, 50Hz	380V, 50Hz
工作环境温度 Working temperature (°C)	0-40	0-40
轴距调节 Wheelbase adjustment (mm)	2300-3500	-



汽车侧滑检测台 Vehicle Side-slip Tester

最大允许轴荷 Max. Axle Load (kg): 3000/10000/15000

测量范围 Measurement Range: ± 15.0m/km
 策划板尺寸 Sideslip board dimensions (mm): 600*500/1000*1000/1100*1000
 放松板尺寸 Release board dimensions (mm): 6000*500/1000*385/1100*385
 结构形式 Structure form: Single/Double With release Galvanized
 仪表电源 Power Supply: AC220V/380V 50Hz

汽车悬架装置检测台 Vehicle Suspension Device Testing Machine

最大通过轴荷 Max. load capacity (Kg): 3000/10000

最大检测轴荷 Max. Detection Weight (kg): 3000
 震动板尺寸 Vibration Plate Dimension (mm): 700*300/650*400
 震动幅度 Vibration Range (mm): 6
 震动频率 Vibration Frequency (Hz): > 15
 电机电源 Power Supply: AC380V 50Hz With Ground Connection



汽车制动检测台 Vehicle Brake Tester

最大允许轴荷 Max. Axle Load (kg): 3000/10000/15000

测量范围 Measurement Range (N): 0-10000/30000/45000x2
 轮轴范围 Wheel Tread (mm): 850-2000/2600/300
 滚筒直径 Roller Diameter (mm): 381/280
 电机功率 Motor Power (kw): 2.2/4.0/11.2/15.2
 电机电源 Power Supply: AC380V 50Hz



汽车平板检测台 Vehicle Platform Tester

最大允许轴荷 Max. Axle Load (kg): 1500/5000

制动力测量范围 Brake Force Measurement Range (N): 0-10000/0-4000
 轮重测量范围 Wheel Weight Measurement Range (kg): 0-1250/0-5000
 侧滑测量范围 Sideslip Measurement Range (m/km): ± 10.0
 结构形式 Formation: Four-Plate + Sideslip (Intergraded)
 电机电源 Power Supply: AC220V 50Hz



汽车速度表检测台 Vehicle Speedometer

最大允许轴荷 Max. Axle Load (kg): 3000/10000/15000


测量范围 Measurement Range (N): 0-120
 滚筒尺寸 Roller Dimensions (mm): Φ190x700/Φ190x1100/Φ190x1200
 滚筒中心距 Roller Axle Separation (mm): 380/405
 气压 Air Supply (MPa): 0.5-0.6/0.7-0.8
 电磁电源 Power Supply: AC220V, 50Hz Ground



摩托车速度表检测台 Motorcycle Tester


最大允许轴荷 Max. Axle Load (kg): 350

轮重测量范围 Wheel Weight Measurement Range (kg): 0-350
 制动力测量范围 Brake Force (N): 0-3000
 车速测量范围 Measurement Speed (km/h): 0-80
 制动电机功率 Brake Motor Power (kW): 1.1/1.1*2
 车速电机功率 Speed Motor Power (kW): 4
 电磁电源 Power Supply: AC380V, 50Hz Ground





车辆检测线系统 Vehicle Test Line System.

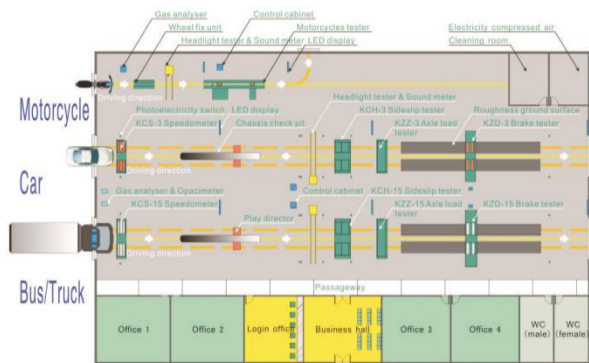

半自动摆臂型/半自动摆臂型+顶辅助臂

FT-3301 Semi-Automatic side swing arm Top assistant



大盘材料Material: 铝合金Aluminium Alloy
最大轮胎直径Max.Wheel Diameter:41"
最大轮胎宽度Max.Wheel Width:14"
内卡尺寸Inside Clamping:13-24"
外卡尺寸Outside Clamping:11-22"
电压Voltage Supply:110V/220V/380V 1Ph/3Ph 50/60Hz
气压Air Supply:8-10Bar
电机Power Supply:0.75Kw-1.1Kw
噪音Noise: < 75dB
净重N.W: 180KG/223KG

FT-3301+CL01



FT-3302+CL02 全自动后倾型+右辅助臂+自动折装头

Pneumatically operated tilting column right assistant arm Automatic assembling head



大盘材料Material: 铝合金Aluminium Alloy
最大轮胎直径Max.Wheel Diameter:41"
最大轮胎宽度Max.Wheel Width:14"
内卡尺寸Inside Clamping:13-24"/13-26"
外卡尺寸Outside Clamping:11-22"/11-24"
电压Voltage Supply:110V/220V/380V 1Ph/3Ph 50/60Hz
气压Air Supply:8-10Bar
电机Power Supply:0.75Kw-1.1Kw
噪音Noise: < 75dB
净重N.W: 259KG/273KG

FT-3303+CL02



FT-3306W

全自动后倾豪华无盘型+右辅助臂

Pneumatically operated tilting column wheel clamping by central flange right assistant arm



大盘材料Material: 铝合金Aluminium Alloy
最大轮胎直径Max.Wheel Diameter:41"
最大轮胎宽度Max.Wheel Width:16"
内卡尺寸Inside Clamping:8-30"
电压Voltage Supply:110V/220V/380V 1Ph/3Ph 50/60Hz
气压Air Supply:8-10Bar
电机Power Supply:0.75Kw-1.1Kw
重量Weight: 314KG



BT-519R 全自动翻转拆胎机系列 Automatic Tire Changer Series

Rim clamping from outside 轮胎外锁定 14" - 24" / 12" - 22"
Rim clamping from inside 轮胎内锁定 15" - 26" / 14" - 24"
Maximum wheel diameter 最大车轮直径 1120mm
Maximum wheel width 最大车轮宽度 350mm
Operating pressure 工作压力 8-10bar
Power supply 电源 220V/380V
Motor power 电机功率: 1.1kW
Max rotation torque of turntable 转盘最大扭矩: 1200N.m
Net weight 净重 230KG/340KG
Noise 噪音 < 70dB



BT-528R



BT-512 拆胎机系列 Tire Changer Series

Rim clamping from outside 轮胎外锁定 10" - 22" / 12" - 18"
Rim clamping from inside 轮胎内锁定 12" - 24" / 14" - 20"
Maximum wheel diameter 最大车轮直径 43" / 100mm / 800mm
Maximum wheel width 最大车轮宽度 13" / 330mm / 320mm
Operating pressure 工作压力 8-12bar
Power supply 电源 220V-1ph / 380V-3ph
Motor power 电机功率: 0.75/1.1kW
Max rotation torque of turntable 转盘最大扭矩: 1100N.m
Net weight 净重 260KG
Noise 噪音 < 70dB



BT-112



BT-119 摩托车拆胎机 Motorcycle tire changer

技术参数 Specification:

Rim clamping from outside 轮胎外锁定: 4" - 20"
Maximum wheel diameter 最大车轮直径 800mm
Maximum wheel width 最大车轮宽度 260mm
Operating pressure 工作压力 6-10bar
Power supply 电源 110V/220V/380V
Motor power 电机功率: 0.75/1.1kW
Max rotation torque of turntable 转盘最大扭矩: 1100N.m
Net weight 净重: 180KG
Gross weight 毛重: 200KG
Noise 噪音 < 70dB
Bead breaker cylinder force operating 胎砧气缸作用力 1800KG



BT-502

大车轮胎拆装机 Automatic Truck Tire Changer



轮胎直径 Rim capacity: 14" - 56"
最大车轮直径 Max. wheel diameter: 2500mm
最大车轮宽度 Max. wheel width: 1200mm
最大车轮重量 Max. wheel weight: 2000kg
齿轮箱电机 Gear box motor: 2.4/3.0kW
液压动力单元 Hydraulic unit motor: 2.4/3.0kW
电压 Power supply: 400V 3Ph 50Hz
包装尺寸 Packing Size (L x W x H): 2310 x 2080 x 1100mm
设备净重 N.W.: 1145kg



轮胎直径 Rim capacity: 14" - 42"
最大车轮直径 Max. wheel diameter: 2300mm
最大车轮宽度 Max. wheel width: 1050mm
最大车轮重量 Max. wheel weight: 1600kg
齿轮箱电机 Gear box motor: 2.2kW 380V-3Ph-50Hz (220V 可选)
液压动力单元 Hydraulic unit motor: 2.2kW 380V-3Ph-50Hz (220V 可选)
电压 Power supply: 220V/400V 50/60Hz 1P/3P (可选)
包装尺寸 Packing Size (L x W x H): 2130 x 1850 x 1090 (mm)
设备净重 N.W.: 758kg

大车轮胎拆装机 Automatic Truck Tire Changer



液压发动机 Hydraulic pump motor: 220V (1/3ph) 380V (3ph) 1.5kw
旋转发动机 Rotating motor: 220 (1ph) 1.5kw 220/380V (3ph) 2.2kw
轮胎直径 Clamping capacity: 14-26"
最大车轮宽度 Max. Wheel width: 780mm (30")
最大车轮直径 Max. Wheel diameter: 1600mm (63")
最大车轮重量 Max. wheel weight: 500kg (1102lbs)
噪音 Noise Level: < 75db
噪音等级 Noise Level: < 75db
包装尺寸 Single package dimension: 2000*1580*950mm (6'6" x 5'2" x 3'11")
设备净重 N/G Weight: 520/670kg (1146/1477)

大车平衡机 Truck Wheel Balancer

电压 Power: 220V 50Hz
电机功率 Motor Power: 220W
最大轮胎重量 Max. tire weight: 200Kg
平衡速度 Balancing Speed: 80r/min 120r/min
最大轮胎直径 Max. Wheel Diameter: 1220mm
最大轮胎宽度 Max. Wheel Width: 700mm
噪音 Noise: < 70db
净重 Net Weight: 300Kg





XR-262

电压Power supply	220V 1PH
电机功率Motor Power	185-320W
主轴转速Balancing speed	≤200r.p.m
平衡精度Balancing precision	±1g
轮辋直径Rim diameter	265-615mm
轮辋宽度Rim width	40-510mm
最大轮胎重量Maximum wheel weight	70Kg
噪音Noise	<70dB
净重N.W	125KG



XR-222

电压Power supply	220V 1PH
电机功率Motor Power	185-320W
主轴转速Balancing speed	190r.p.m
平衡精度Balancing precision	±1g
轮辋直径Rim diameter	265-615mm
轮辋宽度Rim width	40-510mm
最大轮胎重量Maximum wheel weight	70Kg
噪音Noise	<70dB
净重N.W	125KG



SBM-99

电压Power supply	220V 1PH
电机功率Motor Power	185-320W
主轴转速Balancing speed	190r.p.m
平衡精度Balancing precision	±1g
轮辋直径Rim diameter	265-615mm
轮辋宽度Rim width	40-510mm
最大轮胎重量Maximum wheel weight	70Kg
噪音Noise	<70dB
净重N.W	125KG



XR-202

电压Power supply	220V 1PH
电机功率Motor Power	185-320W
主轴转速Balancing speed	190r.p.m
平衡精度Balancing precision	±1g
轮辋直径Rim diameter	265-615mm
轮辋宽度Rim width	40-510mm
最大轮胎重量Maximum wheel weight	70Kg
噪音Noise	<70dB
净重N.W	125KG



平衡机 Tire Balancer FW-6605

技术参考 Technical Specification

最大轮胎重量Max. tire weight	75Kg/143 lb
最大轮胎直径Max. Tyre Diameter	47"
轮毂直径Rim clamping from Outside	10" - 24"
轮毂宽度Rim clamping from Inside	5" - 14"
平衡速度Balancing Speed	200rpm
平衡精度Balancing Precision	1g
电压 Power Supply	110V 60Hz 1PH/230V 50Hz 1PH
平衡时间Balancing Time	6-8s
噪音等级Noise	≤65dB
净重 Net weight	121kg

平衡机 Tire Balancer FW-6608

技术参考 Technical Specification

最大轮胎重量Max. tire weight	65Kg/143 lb
轮胎直径Tire Diameter	47"
轮毂直径Rim clamping Diameter	10" - 24"
轮毂宽度Rim clamping from Inside	1.5" - 20"
平衡速度Balancing Speed	200rpm
平衡精度Balancing Precision	1g
电压 Power Supply	110V 60Hz 1PH/230V 50Hz 1PH
平衡时间Balancing Time	6-8s
噪音等级Noise	≤65dB
净重 Net weight	90kg



平衡机 Tire Balancer FW-6609

技术参考 Technical Specification

最大轮胎重量Max. tire weight	65Kg/143 lb
轮胎直径Tire Diameter	47"
轮毂直径Rim clamping Diameter	10" - 24"
轮毂宽度Rim clamping from Inside	5" - 14"
平衡速度Balancing Speed	200rpm
平衡精度Balancing Precision	1g
电压 Power Supply	110V 60Hz 1PH/230V 50Hz 1PH
平衡时间Balancing Time	6-8s
噪音等级Noise	≤65dB
净重 Net weight	90kg





大巴洗车机 Automatic Bus Washing



技术参数 Specification

洗车尺寸 Washing Size(mm)	12000(L)*2500(W)*3600(H)
机器尺寸 Machine Size(mm)	3100mm*4500mm*5000mm
安装尺寸 Install Size(mm)	18000(L)*5000(W)*5000(H)
耗水量 Water Consumption	150L/Vehicle
洗车时间 Washing Time	100S
电源容量 Power Supply	AC380V 8KW 3Ph 4Wire
水泵: 立式不锈钢高压水泵 (进口品牌)	Stand-type High-pressure Stainless Steel Water Pump



技术参数 Specification

洗车尺寸 Washing Size(mm)	6000mm(L) x 2400mm(W) x 2200mm(H)
机器尺寸 Machine Size(mm)	3950mm(L) x 3800mm(W) x 2690mm(H) (Mini Width: 3450mm)
安装尺寸 Install Size(mm)	6300mm(L) x 4000mm(W) (Mini Width: 3450mm)
耗水量 Water Consumption	100L
高压水泵电机 High pressure water pump & Motor	5.5KW/7.5KW
低压水泵电机 Low-Pressure Water pump & motor	7.5KW
电源容量 Power Supply	AC380V/50Hz 10KVA/15KVA

全自动往复式

Car Gantry Automatic washing machine



往复式五刷/七刷自动洗车机

Gantry Automatic 5Brush/7brush Washer

洗车尺寸: 6000mm(长) x 2200mm(宽) x 2000mm(高)
 机器尺寸: 2450mm(长) x 3500mm(宽) x 3000mm(高)
 安装尺寸: 12000mm(长) x 3700mm(宽) x 3200mm(高)
 耗水量: 80-100L/Vehicle
 洗车时间: 刷洗150秒
 电源容量: AC380V 三相四线 17KW/18KW

Washing size: 6000mm(L) x 2200mm(W) x 2000mm(H)
 Machine size: 2040mm(L) x 3500mm(W) x 3000mm(H)
 Install size: 12000mm(L) x 3700mm(W) x 3200mm(H)
 Water consumption: 80-100L/Vehicle
 Car washing time: 150s
 Power supply: AC380V 17KW/18KW

隧道式九刷/十二刷自动洗车机

Tunnel Automatic 9Brush/12Brush Washer

9SF:

洗车尺寸 Washing size: 6m(长) x 2.2m(宽) x 2m(高)
 机器尺寸 Machine size: 13m(长) x 3.9m(宽) x 3.2m(高)
 安装尺寸 Install size: 18m(长) x 4.1m(宽) x 3.4m(高)
 耗水量 Water consumption: 100L/Vehicle
 洗车时间 Time: 单洗式(清洗+风干)=90' s/辆, 连续式=60' s/辆
 电源容量 Power supply: AC380V 三相四线 25KW

12SF:

洗车尺寸 Washing size: 6.5m(长) x 2.2m(宽) x 2m(高)
 机器尺寸 Machine size: 15m(长) x 3.9m(宽) x 3.2m(高)
 安装尺寸 Install size: 20m(长) x 4.1m(宽) x 3.4m(高)
 耗水量 Water consumption: 100L/Vehicle
 洗车时间 Time: 单洗式(清洗+风干)=90' s/辆, 连续式=60' s/辆
 电源容量 Power supply: AC380V 三相四线 26KW

全自动隧道式洗车机

Car Tunnel Automatic washing machine





广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd

单柱举升机 Single Post Lift

技术参数 Specification

举升重量 Lift weight	3.5T/4.5T
最大局升高度 Maxi Mum Rise	1805mm
最小举升高度 Mini Mum Rise	110mm
气压要求 Air Operate	5-8Bar
液压缸直径 Hydraulic Cylinder Diameter	500mm
工位空间 Recommended Space	3000*6250mm



高压蒸汽洗车机 High Pressure Steam Car Washer



电压 voltage: 380V/220V
 蒸气系列 Motor Type: Diesel/Electric
 功率 Power: 12KW
 耗水量 water consumption: 36L/H
 蒸汽压力 Steam pressure: 12-15Bar
 水箱容量 water tank: 35L
 产汽时间 Preheating time: 60s



高压清洗机 High Pressure Washer



型号 Model	工作压力 Pressure(MPa)	流量 Flow(l/min)	功率 Power(KW)	电压 Voltage(V/Hz)	重量 Weight(kg)
JVCC0815A	8	15	2.2	220	60
JVCC1115A	11	15	3	380	76
JVCC2015J	20	21	5.5	380	110
JVCC3312	33	12	7.5	380	150

冷热水洗车机 Hot Water Cleaner



型号 Model	工作压力 Pressure(MPa)	流量 Flow(l/min)	功率 Power(KW)	电压 Voltage(V/Hz)	转速 Rate(Spot/min)
JVCH15B	8	15	2.2	220/50	1400
JVCH1515B	15	15	4	380/50	1440

燃油高压清洗机 High Pressure Car Washer



洗车系列 Motor Type	柴油/Diesel 汽油/Petrol		
工作压力 Pressure	110bar(1600psi)	150bar(2200psi)	180bar(2500psi)
最大压力 Max. pressure	170bar	230bar	270bar
流量 Flow	6L/min(1.6GPM)	7.5L/min(2.0GPM)	11.5L/min(3.0GPM)
功率 Power	4HP	5.5HP	6.5HP
重量 Weight	55KG	57KG	55KG

钢圈修复机 Rim Straightening Machine



钢圈直径 Rim capacity: 10"-26"
 转速 Rotation: 110rpm
 活塞液压功率: 0.55kw / 0.75 hp Sound 35 db. 3 Phase - single phase, 220V - 380 V
 发动机功率 Metro Power supply: Mechanic 0.55 kw, 1 hp, 3 phase single phase, 220V - 380 V
 工作压力 Working Pressure: 140Bar
 净重 N.W.: 330KG

摩托车举升机 Motorcycles Lift

技术参数 Specification

举升重量 Lift Capacity	500(1102kg/1b)
举升高度 Lifting High	1200mm(47")
上升时间 Lifting Speed	≤25s
下降时间 Decline Speed	≤25s
整机宽度 Total Width	670mm(26.4")
整机长度 Total Length	2360mm(92.9")



硫化机系列 Tire Vulcanizing Machine



技术参数 Specification
 电源 Power: 220V/50HZ
 电机功率 Motor power: 1000w
 温度 Temperature: 可调 Adjustable

技术参数 Specification

电压 Voltage: 220V 380V
 电源 Power: 5400w
 受热面积 Heating area: 1/4 of tire
 硫化温度 Heating area: 135-145°C
 适用范围 Applicable range: 900-1200-20 7.5-8.25-16



扩胎系列 Tire Spreader Series



技术参数 Specification
 适用胎径 Tire Diameter: 8.25"-20"
 工作压力 Working Pressure: 0.6-0.8Mpa
 最大扩胎范围 Max Enlarge Distance: 300mm

技术参数 Specification

适用范围 Apply to tire: 145-275
 电压 Voltage: 220V 50/60HZ 110V 50/60HZ
 气压 Air Pressure: 6-10 KG/CM2





空气压缩机 Air Compressor



技术参数 Specification

功率 (HP/KW)	排气量M ³ /min Displacement	工作气压 Pressure Kg/cm ²	气缸(缸数*缸径) Cylinder diameter * quantity (mm)	储气罐容积 Volume of gas storage tank (L)
3/2.2kw	0.25	6-14	80*2	120
4/3kw	0.36	6-14	90*2	180
5.5/4kw	0.48	6-14	100*2	200
7.5/5.5kw	0.67	6-14	90*3	280
10/7.5kw	0.9	6-14	100*3	320/400
15/11kw	1.8	6-14	100*3	460/500
20/15kw	2.5	6-14	120*3	600

汽油发电机 Gasoline Generator



技术参数 Specification

功率 (HP/KW)	频率(Hz) Frequency	容量(L) Capacity	重量(kg) Weight	规格(mm) Dimension	类别 Fuel
6.5/6 Kw	50 Hz	25L	78/81 Kg	665*520*550	汽油 Gasoline
5.5/5 Kw	50 Hz	25L	70/74 Kg	665*520*550	汽油 Gasoline
2.8/2.5 Kw	50 Hz	15L	38/40 Kg	610*440*435	汽油 Gasoline
2.2/2 Kw	50 Hz	15L	35/37 Kg	610*440*435	汽油 Gasoline

柴油发电机 Diesel Generator



技术参数 Specification


功率 (HP/KW)	频率(Hz) Frequency	容量(L) Capacity	重量(kg) Weight	规格(mm) Dimension	类别 Fuel
2/1.8 Kw	50 Hz	12L	58/61 Kg	660*500*560	柴油 Diesel
3/2.8 Kw	50 Hz	15L	75/78 Kg	660*500*560	柴油 Diesel
5/4.2 Kw	50 Hz	12L	153/162 Kg	950*540*720	柴油 Diesel

节能环保永磁一体螺杆空气压缩机 Screw Air Compressor



型号 Model	电动机功率 Motor Power (KW)	排气量 Air Flow (m ³ /Min/Mpa)	噪音 Noise dB(A)	冷冻式干燥机 Refrigeration dryer	出口管径 Pipe Diameter
SYEA-10P	7.5	0.36-1.2/0.7, 0.33-1.1/0.8, 0.28-0.95/1.0, 0.24-0.8/1.3;	66±2	SYEA-11	G1/2
SYEA-15P	11	0.51-1.7/0.7, 0.48-1.6/0.8, 0.42-1.4/1.0, 0.36-1.2/1.3;	70±2	SYEA-16	G3/4
SYEA-20P	15	0.72-2.4/0.7, 0.66-2.2/0.8, 0.6-2.0/1.0, 0.51-1.7/1.3;	70±2	SYEA-22	G3/4
SYEA-25P	18.5	0.93-3.1/0.7, 0.87-2.9/0.8, 0.81-2.7/1.0, 0.66-2.2/1.3;	72±2	SYEA-27	G1
SYEA-30P	22	1.14-3.8/0.7, 1.05-3.5/0.8, 0.96-3.2/1.0, 0.87-2.9/1.3;	73±2	SYEA-33	G1
SYEA-40P	30	1.56-5.2/0.7, 1.5-5.0/0.8, 1.29-4.3/1.0, 1.11-3.7/1.3;	74±2	SYEA-50	G1

储气罐 Gas holder: 0.3 / 0.6 / 1.0 m³

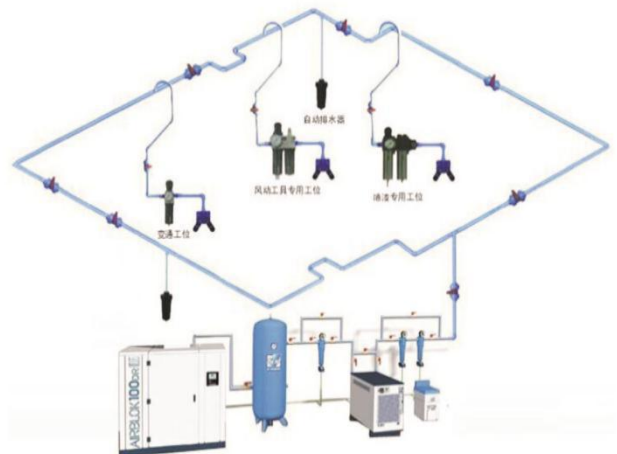



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd

全自动汽车空调管路免拆清洗机 (带清洗功能) Full-Automatic A/C Pipeline Flush Machine (With Cleaning function)

Model: AC-1688



技术参考Specification

冷媒种类Interface type: R134a
储液罐容积Capacity: 14Kgs
回收速度Recycle Speed:
气态Gaseous: 350g/min
液态Liquid: 500g/min
加注速度Refuel Speed: 1500g/min
压缩机Compressor: 3/8HP
真空泵Vacuum pump: 2.5L 双级
电子秤精度Accuracy: ±5g
电源Power Supply: 220V/50Hz

巴士空调全自动冷媒回收加注机 Bus Full-Automatic A/C Refrigerant Recovery Machine

Model: AC-999



技术参考Specification

冷媒种类Interface type: R134a
回收速度Recycle Speed:
气态Gaseity: 10Kg/h
液态Liquid: 1Kg/min
加注速度Refuel Speed: 1Kg/min
压缩机Compressor: 1/2HP
真空泵Vacuum pump: 2L 双级泵
电子秤精度Accuracy: ±5g
工作环境Working Environment:
-10℃-50℃
电源Power Supply: 220V/50Hz

自动冷媒加注机 Automatic Refrigerant Recycling Machine

Model: AC-980



技术参考Specification

电压Power: 220V ±10% /50Hz
抽真空速度Vacuum Speed: 2L/s
回收速度Recycling speed: 3g/s
灌装速度Filling speed:
1500-1980g/min
自动循环速度
Automatic cycle speed: 7g/s
称重准确度: ±0.005g
Weighing accuracy
压力检测准确度: 0.0015 MPa
Pressure detection accuracy
储液罐容积Capacity: 14L
冷媒种类Interface type:
R12/R134a
过滤器Dry filter: 330CC

半自动冷媒加注机 Semi-automatic Refrigerant Recycling Machine

Model: AC-200



技术参考Specification

电压Power: 220V/50HZ 3/8hp
抽真空速度Vacuum Speed: 1L/s
灌装速度Filling speed: 240g/min
称重准确度: 5g
Weighing accuracy
压力检测准确度: 0.0015 MPa
Pressure detection accuracy
储液罐容积Capacity: 6L
冷媒种类Interface type:
R12/R134a



喷油泵试验台 Diesel Fuel Injection Pump Test Bench

型号Model: BFC

电源Power: 7.5Kw 11Kw 15Kw 18Kw
输入电压Input Voltage: 380V
喷油泵启动压力Fuel Injector Opening Pressure: 17.5±0.2 MPa
燃料槽容积Fuel Tank Volume: 60L
预置循环量Rotate Preset Quantity: 7-10
气缸检测容积Measuring Cylinder Volume: 45ml
供油最低气压Oil Supply Low Pressure: 0-0.4MPa
燃油加热功率Fuel Tank Heating: 1KW/220VAC
直流电压Direct Voltage: -0.1-0 MPa
压力范围Positive Pressure Range: 0-0.16MPa



BF1178 共轨系统专用试验台 BF1178 Type Common Rail System Test Stand

针对BOSCH、DENSO、DELPHI、SIEMENS等共轨系统进行检测和试验，包括高压油路、传感器、执行器、共轨喷油器等。

额定输出功率Rated Output Power: 11KW
主机电源Motor Power: 3Ph 380V/50HZ
试验台转速Test Bench Speed: 0-3600RPM/Min
主轴转向principal Axis Direction: 正反
连续喷油次数Continuous Injection Times: 0-1000Times
轨道压力Track Pressure: 0-1800Bar
脉冲宽度Pulse Width: 100-3000µs
实验油过滤精度Injection Oil Filtration Accuracy: <5µ
燃油温度Fuel Temperature: 40±2℃
燃油箱容积Fuel Tank Capacity: 40L



BF1176 电控喷油器试验台 BF1176 Type Common Rail Injection Test Stand

额定输出功率Rated Output Power: 5.5KW
主机电源Motor Power: 3Ph 380V/50HZ
试验台转速Test Bench Speed: 0-3600RPM/Min
连续喷油次数Continuous Injection Times: 0-1000Times
轨道压力Track Pressure: 0-1800Bar
脉冲宽度Pulse Width: 100-3000µs
实验油过滤精度Injection Oil Filtration Accuracy: <5µ
燃油温度Fuel Temperature: 40±2℃
燃油箱容积Fuel Tank Capacity: 15L



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd



智能全自动远、近光检测仪 Intelligent Auto Far and Near Light Detector



技术参数Specification

发光强度Luminous Intensity	0-60,000cd(100,000cd)
前照灯高度测量范围Testing range of headlight	500-1300mm
测量距离Testing Distance	100mm
光轴偏移量	Up to 60° - Down 2x30°
Deviation of Optical Axis	Left 2x30° - Right 2x30°
发光强度 Luminous Intensity	±12%
光轴偏移量Optical Angle	±12°
电源Power Supply	AC220V±10%



前照灯检测仪 Headlight Detector



技术参数Specification

发光强度Luminous Intensity	0-60,000CD(120,000)
光轴偏移量	Up to 60° - Down 2x30°
Deviation of Optical Axis	Left 2x30° - Right 2x30°
远光发光强度市值误差Light Intensity of High Beam	±12%
远光光轴偏移量市值误差Optical Deviation	12°
前照灯中心离市值误差Central Intensity of Highlight	±1cm
电源Power Supply	AC220V±10% 50Hz±1Hz 10DC9V battery(8DC1.5 batteries)



不透光度Opacity (N): 0-99.99%
光吸收系数Light Absorption Coefficient (K): 0-16.0m-1
分辨率Resolving ability: 不透光度Revolving Speed(N)0.1%
市值误差Deviation: 不透光度Opacity N ±2.0%
电源Power Supply: AC220V±10% 50Hz±1Hz

不透光度计 Opacimeter

NHA-506/406 废气分析仪 Exhaust Gas Analyzer

测量范围Testing Range

HC: 0-9.999 × 10 ⁻⁶ (正己烷当量)
CO: 0-10 × 10 ⁻² (%)
CO ₂ : 0-10 × 10 ⁻² (%)
NO: 0-5.0000 × 10 ⁻⁶ (%)

示值误差Indication Error(绝对误差)

HC: ±10 × 10 ⁻⁶ (绝对误差或 ±5% (相对误差))
CO: ±0.03 × 10 ⁻² (%) (绝对误差或 ±5% (相对误差))
CO ₂ : ±5 × 10 ⁻² (%) (绝对误差或 ±5% (相对误差))
O ₂ : ±0.1 × 10 ⁻² (%) (绝对误差或 ±5% (相对误差))
NO: ±25 × 10 ⁻⁶ (%) (绝对误差或 ±4% (相对误差))



预热时间: 10 min(可进行预热5min应急检测)
响应时间: 不大于10S, O₂不大于12S, NO不大于15S.



制动鼓(盘)车床 Brake Drum Machine 型号Model: C9335

技术参数Specification

加工直径范围 Range of Processing Diameter	制动鼓Brake Drum Diameter 制动鼓片 Brake shoe	φ180-φ350mm
工件转速Rotating Speed of Workpiece		90r/min
刀具最大行程Max Travel of tool		100mm
电机功率 Motor Power		0.75KW
外形尺寸Overall Dimensions(mm)		685*565*635
净重N.W		200kg



制动鼓镗机 Vertical Brake drum-type boring machine 型号Model: T836DA 型号Model: LYT866

技术参数Specification

加工直径范围Range of Processing Diameter	220-580mm
工件转速Rotating Speed of Workpiece	37.50r/min
滑板工作行程Working Travel of Slideboard	320mm
电机功率 Motor Power	1.1KW
外形尺寸Overall Dimensions(mm)	955*935*1400
净重N.W	680kg




加高镗缸机 Vertical Cylinder Boring machine 型号Model: T618A-B

技术参数Specification

镗孔直径Boring diameter	φ58-φ180mm
最大镗孔深度Max boring depth	450mm
主轴最大移动量Max travel of spindle	700mm
电机功率 Motor Power	Y100L2-4B3.3kW 1420r/min
主轴转速Speed of spindle(r/min)	175,230,300,350,460,600r/min(140-610)
主轴快移速度Speed of Spindle moving	2.65m/min

汽缸珩磨机 Cylinder Honing Machine

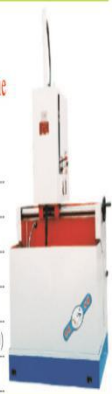

刹车片铆钉机 Auto Brake Shoe riveting machine 型号Model: BY-6 型号Model: BM24B

技术参数Specification

最大铆钉力Max riveting force	60KN
额定工作压力Rated working pressure	0.5-0.8Mpa
铆钉直径Diameter of allowable rivet	40mm
机器尺寸Overall dimension (L*W*H):	580*540*1440mm
净重N.W	72KG





尾气抽排系统 Exhaust extraction system



自由组合鼓 Combination Hose Reel 气鼓水鼓电鼓灯鼓等 Air/Water/Electric/LED Lamp etc.



稀油加注机 Oil Dispenser 黄油加注机 Grease Dispenser



综合鼓系列 Hose Reel Series



水鼓 Water Hose Reel 气鼓 Air Hose Reel 电鼓 Electric Hose Reel 灯鼓 Light Hose Reel



抽接油机 Waste oil drainer



气动稀油加注机 Pneumatic thin oil filling machine
不锈钢泡沫清洗机 Stainless Steel Foam Cleaner



地毯脱水机 Carpet spin drier water extractor



全自动地毯清洗机 Automatic Carpet Cleaner
干式、免漂水 Dry-clean, No need to spin.



中央供液系统 (三项)
The Central For Hydraulic System.



地毯烘干机 Carpet Dryer



蒸汽机 Steamer



高效消毒除味机
Efficient disinfectant in addition to flavor machine





广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd



亚美高E-350低压环保水性面漆喷枪

AMG-E350 HVLP Water-base topcoat paint spray gun

最佳喷涂气压Pressure(MPA)	0.25
空气流量Air flow(L/MIN)	420
喷涂距离Painting range(mm)	150-200
喷涂大小Spray range(mm)	≈280
喷枪重量Weight(g)	498
进气Input	G1/4
进料Material	M16*1.5
可选口径Optional caliber	1.3/1.4

Mini



亚美高C260超级省漆高效重力式面漆喷枪

AMG-C260 HVLP efficient topcoat paint spray gun.

最佳喷涂气压Pressure(MPA)	0.25
空气流量Air flow(L/MIN)	350
喷涂距离Painting range(mm)	170-230
喷涂大小Spray range(mm)	≈280
喷枪重量Weight(g)	498
进气Input	G1/4
进料Material	M16*1.5
可选口径Optional caliber	1.3/1.4

C180 C300



意大利威彩喷枪系列

Italy Spray Gun Series

喷枪材质Material: 不锈钢Stainless Steel
口径Diameter: φ1.2, 1.3, 1.4
容量Capacity: 0.18L/0.68L/1.0L

德国萨塔喷枪系列

Germany SATA Spray Gun Series

最大输出Pressure: 0.4Mpa
喷射宽度Paint Width: 200mm
最大喷射流Air Flow: 175L/min
最佳喷射距Painting Range: 400mm



洗地吸干机 Scrubber

电压Voltage/Frequency: DC24V/220V-50Hz
清水箱容量Clean water tank volume: 22L
污水箱容量Sewage water tank volume: 24L

双刷洗地机

Dual-brush ground cleaning machine

电压Voltage: 220V-240V
功率Power: 1940W
电流Current: 43.5A



驾驶式洗地机 Ride-scrubber dryer

工作效率Working Efficiency: 3500-4500m²/h
工作宽度Working width: 850mm
洗地刷转速Washing brush speed: 150rpm/min
行车电机电压Running motor voltage: 36V
行车电机功率Running motor power: 900W
清水箱容量Clean water tank volume: 130L
污水箱容量Sewage water tank volume: 125L
运行时间Run duration: 4h



吸尘吸水机

Wet and Dry Vacuum Cleaner

15L/30L/60L/80L
电压Voltage: 220V-240V
功率Power: 1000W
2000W
3000W



汽车座椅内饰清洗机

Sofa Maintainer

技术参数Technical Specification
容量Capacity: 6.5L/8.5L
电压Voltage: 220V-240V 50Hz-60Hz
功率Power: 1.5W
电流Current: 0.5A



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd



压床系列 PRESS SERIES

手动/电动压床
Manual Operation
20/30/50/80 Ton

Electric Operation
50/80/100/150 Ton

20T



大车波箱托架 Low position transmission jack 0.5T/1T 波箱架 0.5T/1T Transmission jack 引擎吊机2/3T 2T Engine crane 引擎支架 0.5T engine support



3/6T 千斤顶支架 Jack Stand 60-100T 气动顶 Pneumatic Jack 80T 顶高机 Pneumatic hydraulic Jack 3T 气囊顶 Pneumatic Air lifting Jack 汽车移动顶 Vehicle Positioning Jack



2-100T 立顶 Bottle Jack 5/10/20T 加长卧顶 Long Floor Jack 4T/10T 分离顶 Hydraulic Body-Frame Jack 1.5/3/4/5T 卧顶 Floor Jack 12V/24V 电动千斤顶 Electric Hydraulic Jack



12V/24V 千斤顶 Electric hydraulic jack 引擎翻转架 Engine stand 液压弯管机 Hydraulic Pipe Bender 修车凳 Chair 塑料卧板 Car Repair Creeper



FY-913



FY-909H



FY-907E



FY-917



FY-808H



FY-807



FY-804



FY-802



FY-707



FY-705



FY-703



FY-701



FY-607



FY-605



TLK57253



TLK58286



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd



FY-999



FY-903H



FY-903B



FY-902

FY-800ESH



FY-800LS
带漏油槽(大修工作台)
With Oil Leakage



FY-811R
防静电工作台
Anti-static Platform



FY-811SH



FY-824SH



FY-826R
防静电工作台
Anti-static Platform



FY-812R
防静电工作台
Anti-static Platform



FY-701
防静电工作台
Anti-static Platform



JBT-Diesel&Petrol/Diagnostic/金奔腾汽油柴油解码器



JBT-CS538D



JBT-CS638B



SDT929



T600



JBT-CS360

Diesel&Petrol LAUNCH/元征汽油柴油解码器



X431 iDiag



X-431 PRO3



X-431 PRO



X-431 PAD



X431 3G



X431 PAD II

Vehciel Diagnostic/Key Program/钥匙匹配仪汽车诊断仪



AD900



CR-PRO



NEXIQ



SBB



T300



Tester 2



BMW ICOM A+B+C



Lexia-3 Peugeot Citroen



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd

产品介绍 PRODUCT INTRODUCTION


49-50




35件综合花形工具组套09010 9件特殊球头内六角扳手组套09101 86件套筒组套 09013 120件公英制综合组套 09014 9件加长中孔花形扳手组套09702



21件10MM综合组套 52件6.3MM综合组套 25件12.5MM综合组套 58件机械设备维修组套 150件6.3*10*12.5MM综合组套

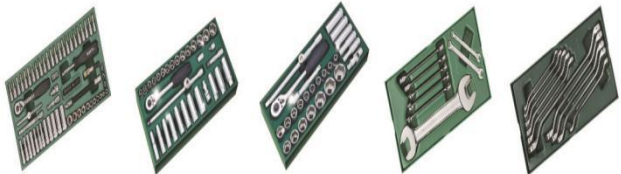

66件6.3MM系列套筒 66Pcs 6.3mm Series Socket 33件10MM套筒09002 33Pcs 10mm Socket 12.5MM套筒 09003 27Pcs 12.5mm Socket 双开口扳手及两用扳手 08804 Double Direction Open Combination Wrench 10件扭力扳手 08805 10Pcs Polishing Surface Double Opening Wrench

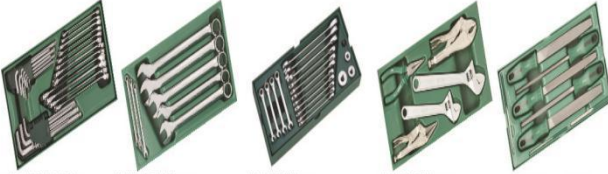

30件两用扳手及六角扳手08806 30Pcs Combination and Hex Key Set 8件全抛光两用扳手08907 8Pcs Polishing Combination Wrench 19件全抛光两用扳手 08908 19Pcs Polishing Combination Ratchet Wrench 5件活动扳手及钳子 08909 5Pcs Adjustable Wrench&Strippers 8件锉刀 09910 8Pcs File Set



4件卡簧钳 09911 4Pcs Circlip Pliers Straight 4件钳子 09912 4Pcs Pliers 13件螺丝批 09913 13Pcs Screw Driver 38件3/8 "1/2" 风动套筒 08914 38Pcs 3/8 " +1/2 " Impact Sockets 26件12.5MM套筒 09915 26Pcs 125mm Sockets



8件4系列花形套筒组套080305 8Pcs 4系列花形套筒组套 8件A型一字、十字螺丝批组套08036 8Pcs A型一字、十字螺丝批组套 2件全抛光两用扳手组套09027 2Pcs Polishing Combination Wrench 11件全抛光两用扳手组套09028 11Pcs Polishing Combination Wrench 13件全抛光双开口扳手组套09029 13Pcs Polishing Surface Double Opening Wrench 120+1件6.3*10*12.5mm 汽车维修综合组套09014A 120+1Pcs 6.3*10*12.5mm Car Maintenance Comprehensive Tool Set



15件基本维修组套 06608 15Pcs Basic Maintenance Tool Set 11件司机随车工具组套08011 11Pcs Driver's Car Tool Set 38件6.3mm系列花型套筒组套 09002 38Pcs 6.3mm Series Flower Socket Set 17件通用机械维修组套(含207) 95207S 17Pcs Universal Mechanical Maintenance Tool Set (Including 207) 110件通用五金组套(含208) 85208S 110Pcs Universal Hardware Tool Set (Including 208)



气动螺丝批 Grinding machine 定位点焊钻 Spot welding drill 气动钻 Pneumatic drill 气动锯 Pneumatic saw



电动角磨机 Electric Angle grinder 气动抛光机 Pneumatic polishing machine 气动角磨机 Pneumatic grinder 手电钻 electric drill



大风炮 Impact wrench 大风炮 Impact wrench 大风炮 Impact wrench 风炮套筒 Impact wrench



台式砂轮机 Bench grinder 手电钻 Electric drill 手电钻 Electric drill 角磨机 Angle grinder



气动棘轮扳手 Air ratchet wrench 得伟抛光机 Polishing machine 得伟手电钻 Electric drill 得伟角磨机 Angle grinder



气动磨灰机 Grinding machines 型材切割机 Cutting machine 台钻 Bench drill 台虎钳 Vise



螺丝批 10pcs Screwdriver
E型套筒 E-Type Socket
油管扳手 Wrench
气动套筒 Pneumatic Socket
加长E型套筒 Long E-type Socket
挤压扩管器工具组 Extrusion expander set



合金钢丝扳板牙 40pcs Combination Set
1/2 8pcs 六角一体套筒 1/2 8pcs Hex Socket
1/2 8pcs T型一体套筒 1/2 8pcs T-type Socket
1/2 8pcs M型一体套筒 1/2 8pcs M-type Socket
1/2 8pcs M型一体套筒 1/2 8pcs M-type Socket



35件套筒 35pcs Socket
32件套筒组 1/2DR 32pcs Socket 1/2DR
140件套筒组 140pcs Socket
冷气管路侧漏接头 A/C Sys. Testing Adaptor
冷气管路侧漏接头 A/C Sys. Testing Adaptor



40件S2批组 40pcs S2 Desan
44件黑金刚批组 44pcs Black Vajra Desan
46件细套工具 46pcs Tools Set
94件细套工具 94pcs Tools Set
106件细套工具 106pcs Tools Set



9件组套工具 9pcs Tools Set
9件中控星匙 9pcs Hex Key Set
机油、自动变速箱压力表 Engine Oil AG Pressure Meter
柴油气缸压力表 Diesel Cylinder Pressure Meter
机油压力表 Engine oil Pressure Meter



全车系燃油压力测试仪 Fuel Sys. Pressure Tester
全车电喷油路系统诊断仪 Injection Sys. Tester
快速型气缸压力表 Cylinder Pressure Meter
燃油压力测试仪 Fuel Pressure Tester
多用型气缸压力表 Multi Cylinder Pressure Meter



BMW 正时工具组 BMW N52 Timing Tool Kit
凸轮轴固定器(BMW N53/54) BMW(N53/54) Camshaft Fixing Base
BMW 正时工具组 BMW(N62/73) Alignment Tool
BMW 正时工具组(M50) BMW(M50) Alignment Tool



BMW 发动机正时工具组 BMW Engine Timing Tool Kit (N40, N45, N45T)
8 PCS BMW 发动机正时工具组套 (For N42, N46, N46T)
BMW 正时工具(N12, N14) BMW Mini Timing Tool (N12, N14)
BMW 正时工具组 M40/M42/M50/M60/M62/M70



Volvo/Land Rover 正时工具组 Volvo/Land Rover Alignment Tool Set(3.0/3.2/T6)
BMW 正时工具组(M40)引擎 BMW Camshaft Alignment Tool(M40)
BMW 双可变气门正时工具组 M52/U/M54/M56



VW Audi 喷油嘴拆卸器(汽油车) VW Audi Injector Remover
VW Audi 正时工具组(1.41.6FSI) VW Audi Engine Timing Tool Set(1.41.6FSI)
VW Audi 正时工具组 VW Audi Camshaft Alignment Tool Set



VW Audi 直接点火线圈拆卸器 4PCS VW Audi Ignition Coils Puller Set
雪铁龙、宝狮正时工具组 Engine Timing Tool Set-Citroen/Peugeot
4PCS 福特、马自达正时工具 4PCS Ford/Mazda Timing Tools Set



VW Audi 正时工具组(2.0FSI) VW Audi Timing Tool Set(2.0FSI)
正时工具组(Volvo专用) Camshaft(Crankshaft) Alignment Tool
VW Audi 喷油嘴拆卸器(汽油柴油) VW Audi Diesel Injector Remover



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd



VW Audi 正时工具组(V6/V8)
VW Audi Camshaft Alignment Tool



VW Audi 正时工具组(W12.6.Oli.Q7 3.6)
VW Audi Engine Timing Tool set



正时皮带盘拆装器
Balancer Puller/Installer



曲轴固定插销(VW Audi)
Crankshaft Locking Pin



VW Audi 凸轮轴调整套筒(A3)
VW Audi Camshaft Adjusting Socket-A3



VW Audi 凸轮轴旋转套筒
VW Audi Camshaft Turning Adapter



VW Audi 凸轮轴调整套筒
Audi Camshaft Adjusting Socket



VW Audi 凸轮链条张紧器
VW Audi Cam Chain Tensioner Holder



VW Audi 双凸轮轴固定器(3.0)
VW Audi Cam Holder



发动机皮带盘拆装组
Engine Pulley Remover



全车系发电机拆装组
Universal Disassembling Set(Generator)



单个发电机皮带盘拆装器
Generator pulley disassembling



动力方向盘拆装组
Power steering disassembling Set



通用滑锤组(双盘)
Universal Slide hammer (Double disk)



三爪内外地令滑锤组
Three jaw Slide hammer



免拆式避震弹簧压缩器
Suspension spring compressor



奔驰避震弹簧压缩器
Benz suspension spring compressor



21PCS 正反牙蝶式分泵调整组
21PCS butterfly adjusting Set



轴承拉马
Bearing Puller



三抓拉马
3-Jaw Puller



美式直角拉马
2-Arm Puller



轴承拉马
Bearing Puller



卷形弹簧压缩器
Spring Compressor



胶拟起子
Tiny crowbar



1/2气动一体批组
1/2 Adapter



接杆
Extension bar



T型扳手
T-Type Wrench



L型穿孔扳手
L type wrench



L杠
L Bar



L型轮胎扳手
L type tire wrench



7件冷气管拆装器
A/C pipe replace



吸棒
Magnet bar



72齿棘轮扳
ratchet wrench



30kg指针式扭力扳手
Torque wrench



可调式扭力扳手
Torque wrench



轮胎撬棍
Tyre clawbar



伸缩型轮胎扳手
Flex Wheel Wrench



十字轮胎扳手
Cross Wheel Wrench



活动套筒两用扳手
Combination wrench



棘轮两用扳手
Ratchet Combination wrench



双向加气嘴
Gas nozzle



平衡钳
Balance pliers



两用真空泵
Vacuum pump



吸尘枪
Air dust gun



引擎清洗枪
Engine cleaning gun



封轴机
Sealing machine



刻字笔
Engraving pen



拖车绳
Tow rope



电子式快速充电器
Electronic charger



红外线测温仪
Infrared thermometer



可视蓄电池检测仪
Battery leak detector



内窥镜(带显示屏)
Endoscopy with screen



内窥镜
Endoscopy



汽车万用表
Multimeter



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd



压胶枪 Caulking guns 塑料焊枪 Plastic welding torch 气动打胶枪 Pneumatic Glue Guns 不锈钢压胶枪 Stainless steel Glue Guns 热风筒 Hot wind gun 抛光机 Polishing machine



引擎清洗枪 Engine cleaning gun 龙卷风清洗枪 Washing gun 底盘防撞枪 Anti-collision gun 金属吹尘枪 Air Gun 大风吹尘枪 Air Gun 双缸打气泵 Double-cylinder tire inflator



数字式轮胎打气表 Digital Tire inflator 大车轮胎打气表 Truck inflator 轮胎打气表 Tire Gauge 指针式轮胎打气表 Tire Inflator 压缩空气等级组 A/C meter 荧光测漏仪 Perplexed leak detector



电瓶线 Cable 补胎工具 Tyre Repair Kit 钢丝绳车绳 Wire Rope Tow 扩管器 Tube expander 气动研磨机 Pneumatic Grinder 气缸测漏仪 Cylinder leak detector



刹车油检测仪器 brake oil detector 数字噪音计 Digital noise meter 水箱测漏仪 Tank leak tester 冰点测试仪 Freezing point tester 真空压力表 Vacuum gauge 蓄电池测试仪 (普通) Battery Tester 动力转向压力测试仪 steering pressure tester

电压 Voltage: 220V 50Hz 功率 Power: 300W

黄油加注机 Grease pump

机油路堵死加注机 Lubri cation pump



点火正时枪 Timing Light 点火正时枪 (柴油) Timing Light (diesel)



大流量钢制快速接头 Connector 大流量钢制快速接头 Connector 大流量钢制快速接头 Connector 大流量钢制快速接头 Connector 大流量钢制快速接头 Connector 大流量钢制快速接头 Connector



钢制快速接头 Connector 钢制快速接头 Connector 钢制快速接头 Connector 钢制快速接头 Connector 钢制快速接头 Connector 钢制快速接头 Connector



钢制快速接头 Connector 钢制快速接头 Connector 圆头二通 Connector 圆头三通 Connector 直插二通 Connector 直插三通 Connector



单面羊毛球 Wool ball 双面羊毛球 Wool ball 抛光海绵球 Polishing sponge ball 自粘波浪海绵球 Velcro sponge balls 自粘平面海绵球 Velcro sponge balls 抛光粘盘 Velcro disc



贴膜工具 Lamination 电瓶线 Battery wire 轮胎深度规 Tire depth meter 叶子板 Cover 清洗液 Cleaning fluid 冷媒O-ping组 Refrigerant set



环保冷媒快速接头 A/C connector 开瓶器 Opener 冷媒快速接头 A/C connector 冷媒转换接头 A/C connector 3M防毒工具 3M mask 冷媒表 Refrigerant meter



广州市保骅汽保设备有限公司

Guangzhou Baohua Auto Maintenance Equipment Trade Co., Ltd

