



Refrigerated Equipment



- Refrigerated Bench
- Refrigerated Pizza Table
- Salad Table & Wall Mounted Refrigerated Cabinet
- Blast Freezer & Bar Glass Counter
- Upright Fridge, Freezer & Blast Banquet Cart Refrigerator
- Beverage Showcase
- Supermarket Showcase
- Ice Cream Showcase
- Cake Showcase
- Hotel Mini Fridge
- Red Wine Cabinet
- Walk In Cool Room & Freezer Room
- Refrigerated Bench
- Refrigerated Pizza Table
- Salad Table & Wall Mounted Refrigerated Cabinet
- Blast Freezer & Bar Glass Counter
- Upright Fridge, Freezer & Blast Banquet Cart Refrigerator
- Beverage Showcase
- Supermarket Showcase
- Ice Cream Showcase
- Cake Showcase
- Hotel Mini Fridge
- Red Wine Cabinet
- Walk In Cool Room & Freezer Room

*custom-made Size and Model Acceptable

Refrigerated Counter



CK-SCC2

Length: 1365mm
Depth: 700mm
Height: 850mm
Frig Power: 336w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 260L
Net Weight: 92kg



CK-SCC2-1

Length: 1365mm
Depth: 700mm
Height: 850mm
Frig Power: 336w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 260L
Net Weight: 92kg



CK-SCC2-2

Length: 1365mm
Depth: 700mm
Height: 850mm
Frig Power: 336w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 260L
Net Weight: 92kg



CK-SCC2-3

Length: 1365mm
Depth: 700mm
Height: 850mm
Frig Power: 336w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 260L
Net Weight: 92kg



CK-SCC2-4

Length: 1365mm
Depth: 700mm
Height: 850mm
Frig Power: 336w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 260L
Net Weight: 92kg



CK-SCC3

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg



CK-SCC3-1

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg



CK-SCC3-2

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg

Refrigerated Counter



CK-SCC3-3

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg



CK-SCC3-4

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg



CK-SCC3-5

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg



CK-SCC4

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SCC4-1

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SCC4-2

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SCC4-3

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SCC4-4

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SCC4-5

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg

Refrigerated Counter



CK-SCC2G

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 348w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 117kg



CK-SCC3G

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 348w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 117kg



CK-SCC4G

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 348w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 117kg



CK-SSC2

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SSC3

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



Refrigerated Pizza Table

CK-SPZM3-700

Dimension(LxWxH): 1400x700x1450 mm
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Static with fan
N.W/G.W: 165/177 Kg

Pizza Table & Salad Counter



Refrigerated Pizza Table CK-SPZM2-800

Dimension(LxWxH): 1510x800x1415 mm
Voltage:220V/50Hz
Power:0.32Kw
Volume:390L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 194/218Kg



Refrigerated Pizza Table CK-SPZM6D-800

Dimension(LxWxH): 1510x800x1415 mm
Voltage:220V/50Hz
Power:0.32Kw
Volume:390L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 194/218Kg



Refrigerated Pizza Table CK-SPZM3-800

Dimension(LxWxH): 1510x800x1415 mm
Voltage:220V/50Hz
Power:0.32Kw
Volume:390L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 194/218Kg



Sandwich Preparation Counter CK-SPZ2-700

Dimension(LxWxH): 1510x800x1415 mm
Voltage:220V/50Hz
Power:0.32Kw
Volume:390L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 194/218Kg



Sandwich Preparation Counter CK-SPZ3-700

Dimension(LxWxH): 1510x800x1415 mm
Voltage:220V/50Hz
Power:0.32Kw
Volume:390L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 194/218Kg



Sandwich Preparation Counter CK-SPZ2-800

Dimension(LxWxH): 1510x800x1415 mm
Voltage:220V/50Hz
Power:0.32Kw
Volume:390L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 194/218Kg



Refrigerated Pizza Table CK-SPZ3-800

Dimension(LxWxH): 1510x800x1415 mm
Voltage:220V/50Hz
Power:0.32Kw
Volume:390L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 194/218Kg



Refrigerated Pizza Table CK-SSL3D4

Dimension(LxWxH): 1510x800x1415 mm
Voltage:220V/50Hz
Power:0.32Kw
Volume:390L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 194/218Kg



Refrigerated Pizza Table CK-SPZ900ST

Dimension(LxWxH): 1510x800x1415 mm
Voltage:220V/50Hz
Power:0.32Kw
Volume:390L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 194/218Kg

Salad Table



Salad Table CK-SSL1

Dimension(LxWxH): 900x700x850 mm
Voltage:220V/50Hz
Power:0.204Kw
Volume:250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 70/75Kg



Salad Table CK-SSL2

Dimension(LxWxH): 900x700x850 mm
Voltage:220V/50Hz
Power:0.204Kw
Volume:250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 70/75Kg



Salad Table CK-SSL3

Dimension(LxWxH): 900x700x850 mm
Voltage:220V/50Hz
Power:0.204Kw
Volume:250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 70/75Kg



Salad Table CK-SSL4

Dimension(LxWxH): 900x700x1075 mm
Voltage:220V/50Hz
Power:0.204Kw
Volume:250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 89/100Kg



Salad Table CK-SSL5

Dimension(LxWxH): 900x700x850 mm
Voltage:220V/50Hz
Power:0.204Kw
Volume:250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 72/82Kg



Salad Table CK-SSL6

Dimension(LxWxH): 900x700x850 mm
Voltage:220V/50Hz
Power:0.204Kw
Volume:250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 72/82Kg



Salad Table CK-SSL7

Dimension(LxWxH): 900x700x850 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 85/105Kg



Salad Table CK-SSL8

Dimension(LxWxH): 900x700x850 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 80/90Kg



Salad Table CK-SSL9

Dimension(LxWxH): 900x700x850 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 88/98Kg

Blast Freezer & Back Bar Cooler



**Blast Freezer
CK-HBF3**

Dimension(LxWxH): 800x815x925mm
Voltage: 230V/50Hz
Interior size: 600x420x330mm
Temperature: 70/3°C in 90min
Temperature: 70/-18°C in 240min
Power: 703 W
Capacity: 3 1/1 GN



**Blast Freezer
CK-HBF5**

Dimension(LxWxH): 800x815x1015mm
Voltage: 230V/50Hz
Net weight: 95 kg
Interior size: 600x420x400mm
Temperature: 70/3°C in 90min
Temperature: 70/-18°C in 240min
Power: 801 W
Capacity: 5 1/1 GN



**Blast Freezer
CK-HBF10**

Exteriou Size(LxWxH): 800x815x1645mm
Interior Size: 600x420x870 mm
Voltage: 230V/50Hz
Power: 1398W
Pan support(GN/1):10Prirs
Pan support(400x600mm):10Prirs

CK-HBF14

Exteriou Size(LxWxH): 800x815x2170mm
Interior Size: 600x420x1170 mm
Voltage: 230V/50Hz
Power: 2000W
Pan support(GN/1):14Prirs
Pan support(400x600mm):14Prirs



**Back Bar Bottle Cooler
BC-D1**

Dimension(LxWxH): 600x510x895mm
Temperature: 2-10 °C
Power: 145 W
Door: 1 pcs
Volume: 115L
Mode: Air Cooling
Refrigerant: R134a



**Back Bar Bottle Cooler
BC-D2**

Dimension(LxWxH): 920x510x895mm
Temperature: 2-10 °C
Power: 145 W
Door: 2 pcs
Volume: 210L
Mode: Air Cooling
Refrigerant: R134a



**Back Bar Bottle Cooler
BC-D3**

Dimension(LxWxH): 920x510x895mm
Temperature: 2-10 °C
Power: 145 W
Door: 3 pcs
Volume: 303L
Mode: Air Cooling
Refrigerant: R134a



Upright Fridge & Freezer



**Upright Chiller With
1 Full Door**

CK-SUC660

Size (LxWxH mm): 660x780x2010
Type of cooling: Ventilated
Temperature: +2~+8°C
Packing Size(LxWxH mm): 730x850x2050
Refrigerant Gas: R134a
Capacity: 527L
Shelf: 3
Net Weight (kgs): 106
Gross Weight(kgs): 120
Qty Of 20FT: 18
Qty of 40FT: 39
Qty of 40 HQ FT: 39
 CE Approval



**Upright Freezer With
1 Full Door**

CK-SUF660

Size (LxWxH mm): 660x780x2010
Type of cooling: Ventilated
Temperature: -18 ~-22°C
Packing Size(LxWxH mm): 730x850x2050
Refrigerant Gas: R134a
Capacity: 527L
Shelf: 3
Net Weight (kgs): 111
Gross Weight(kgs): 116
Qty Of 20FT: 18
Qty of 40FT: 39
Qty of 40 HQ FT: 39
 CE Approval



**Upright Chiller With
2 Full Doors**

CK-SUC1340

Size (LxWxH mm): 1340x800x2040
Type of cooling: Ventilated
Temperature: +2~+8°C
Packing Size(LxWxH mm): 1380x850x2050
Refrigerant Gas: R134a
Net Weight (kgs): 136
Gross Weight(kgs): 150
Qty Of 20FT: 10
Qty of 40FT: 22
Qty of 40 HQ FT: 22
 CE Approval



**Upright Freezer With
2 Full Doors**

CK-SUF1340

Size (LxWxH mm): 1340x800x2040
Type of cooling: Ventilated
Temperature: +2~+8°C
Packing Size(LxWxH mm): 1380x850x2050
Refrigerant Gas: R134a
Net Weight (kgs): 136
Gross Weight(kgs): 150
Qty Of 20FT: 10
Qty of 40FT: 22
Qty of 40 HQ FT: 22
 CE Approval



**Upright Chiller With
2 Half Doors**

CK-SUC2D-660

Size (LxWxH mm): 660x780x2010
Type of cooling: Ventilated
Temperature: -18 ~-22°C
Packing Size(LxWxH mm): 730x850x2050
Refrigerant Gas: R134a
Capacity: 1285L
Shelf: 3
Net Weight (kgs): 106
Gross Weight(kgs): 120
Qty Of 20FT: 18
Qty of 40FT: 39
Qty of 40 HQ FT: 39
 CE Approval



**Upright Freezer With
2 Half Doors**

CK-SUF2D-660

Size (LxWxH mm): 660x780x2010
Type of cooling: Ventilated
Temperature: -18 ~-22°C
Packing Size(LxWxH mm): 730x850x2050
Refrigerant Gas: R134a
Net Weight (kgs): 106
Gross Weight(kgs): 120
Qty Of 20FT: 18
Qty of 40FT: 39
Qty of 40 HQ FT: 39
 CE Approval

Customizable Chiller



**Upright Chiller 2 Half Door
304SCK-UC395-2**

Main material: SS 304
Dimension(mm): 620x760x1980
Voltage: 220V/50Hz
Power: 427W
Volume: 395L
Temperature: -5°C~10°C
Compressor: Embraco
Refrigerant: R134a
Cool mode: Ventilated



**Upright Chiller 4 Half Door
304SCK-UC865-4**

Main material: SS 304
Dimension(mm): 1210x760x1980
Voltage: 220V/50Hz
Power: 633W
Volume: 865L
Temperature: -5°C~10°C
Refrigerant: R134a
Cool mode: Ventilated
Compressor: Embraco



**Upright Freezer 6 Half Door
304SCK-UC1340-6**

Main material: SS 304
Dimension(mm): 1800x760x1980
Voltage: 220V/50Hz
Power: 887W
Volume: 1340L
Temperature: -5°C~+10°C
Compressor: Embraco
Refrigerant: R404A
Cool mode: Ventilated
Doors: 6 stainless steel doors



**Europe Type Upright Chiller
1 Half Door with 3 Drawers
304SCKE-U1M-WD**

Main material: SS 304
Dimension(mm): 737x815x1975
Voltage: 220V/50Hz
Volume: 450L
Temperature: -2°C~+4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 4pcs



**Europe Type Upright Chiller
2 Half Glass Door
304SCKE-U1M-HD-GD**

Main material: SS 304
Dimension(mm): 737x815x1975
Voltage: 220V/50Hz
Volume: 555L
Temperature: -2°C~+4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 4pcs



**Europe Type Upright Chiller
4 Half Glass Door
304SCKE-U2M-HD-GD**

Main material: SS 304
Dimension(mm): 1400x815x1975
Voltage: 220V/50Hz
Volume: 1182L
Temperature: -2°C~4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 8pcs

Customizable Chiller



**Europe Type Upright Chiller
1 Channel Door
304SCKE-U1M-HD-PT**

Main material: SS 304
Dimension(mm): 737x815x1975
Voltage: 220V/50Hz
Volume: 555L
Temperature: -2°C~+4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 4pcs



**Europe Type Upright Chiller
2 Channel Door
304SCKE-U2M-FD-PT**

Main material: SS 304
Dimension(mm): 1400x815x1975
Voltage: 220V/50Hz
Volume: 1182L
Temperature: -2°C~+4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 8pcs



**Europe Type Counter Chiller 2 Door
304SCKE-C12M-XDD**

Main material: SS 304
Dimension(mm): 1420x700x850
Voltage: 220V/50Hz
Volume: 274L
Temperature: -2°C~4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 4pcs



**Europe Type Counter Chiller 3 Doors
304SCKE-C13M-X2D**

Main material: SS 304
Dimension(mm): 1885x700x850
Voltage: 220V/50Hz
Volume: 423L
Temperature: -2°C~4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 6pcs



**Europe Type Counter Chiller 4 Door
304SCKE-14M-XDDDD**

Main material: SS 304
Dimension(mm): 2350x700x850
Voltage: 220V/50Hz
Volume: 600L
Temperature: -2°C~4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 8pcs

Bar Counter or Bar Station



Bar Counter or Bar Station



Center Island Work Station

Size (LxWxH mm): 1200x700x850



Chilling Worktable With Sink

Size (LxWxH mm): 1200x700x850+150



Single Compartment Sink With Over Shelf

Size (LxWxH mm): 1200x700x850



Waste Collector

Size (LxWxH mm): 1200x700x850+150



Dish Worktable

Size (LxWxH mm): 1200x700x850+150



Ice Storage Cabinet

Size (LxWxH mm): 1200x700x850+180

Beverage Showcase




Model	Dimension (LxWxH mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m²)	Refrigeration Power (W)	Lighting Power (W)	Voltage (V)	Cooling Mode
SP-20CL	2000x1180x1280	2 ~ 8	650	1.8	490	40	220	Ventilated
SP-25CL	2500x1180x1280	2 ~ 8	850	2.5	780	60	220	Ventilated
SP-20F	2000x1180x1280	2 ~ 8	650	1.8	780	40	220	Ventilated
SP-25F	2500x1180x1280	2 ~ 8	850	2.5	780	60	220	Ventilated
SP-20SL	2000x1180x1280	2 ~ 8	650	1.8	490	40	220	Ventilated
SP-25SL	2500x1180x1280	2 ~ 8	850	2.5	780	60	220	Ventilated

Model	Dimension (LxWxH mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m²)	Heating Power (W)	Lighting Power (W)	Voltage (V)
SP-H20CL	2000x1180x1280	30 ~ 65	650	1.8	1500	40	220
SP-H25CL	2500x1180x1280	30 ~ 65	850	2.5	2000	60	220
SP-H20F	2000x1180x1280	30 ~ 65	650	1.8	1500	40	220
SP-H25F	2500x1180x1280	30 ~ 65	850	2.5	2000	60	220



Model	Dimension (LxWxH mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m²)	Refrigeration Power (W)	Lighting Power (W)	Voltage (V)	Cooling Mode
SP-BS1V	600x700x2100	0 ~ 10	310	0.82	240	12	220	Ventilated
SP-BS2V	1200x700x2100	0 ~ 10	670	1.65	380	70	220	Ventilated
SP-BS3V	1800x700x2100	0 ~ 10	1100	2.48	530	120	220	Ventilated

Supermarket Showcase

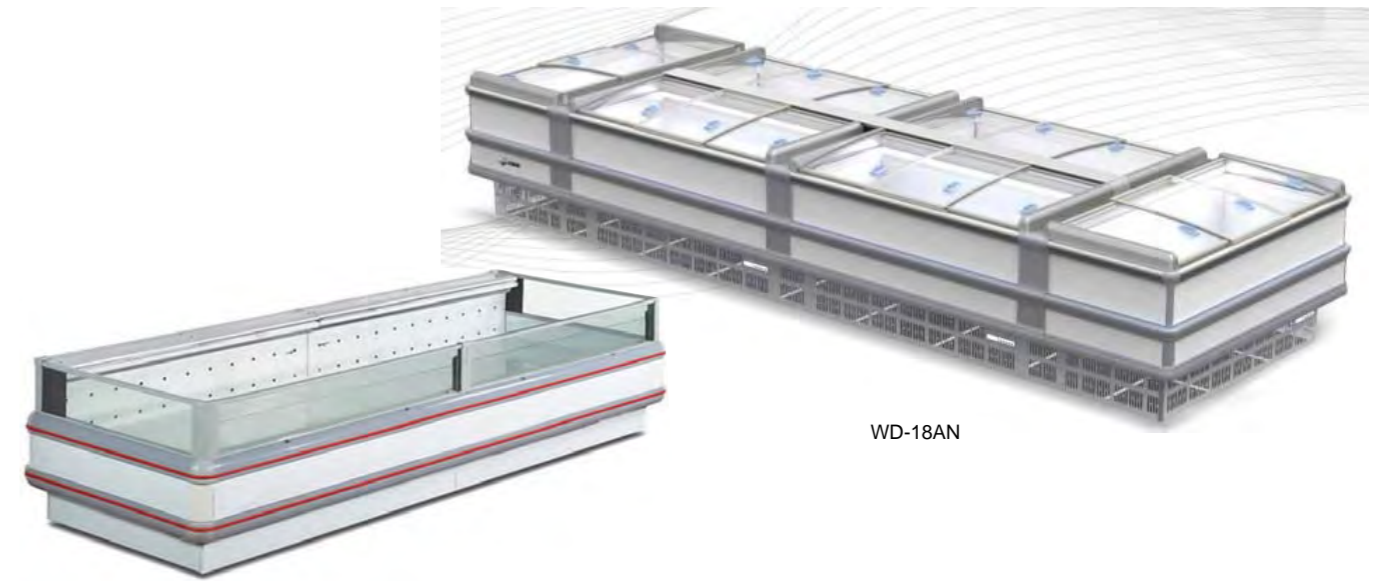

Model	Dimension (LxWxH mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m²)	Heating Power (W)	Voltage (V)	Cooling Mode	Notes
WD-18AN	5500x1850x1025	-18 ~ -22	4080	10.2	3900	220	Ventilated	Stainless steel
SP-I20	2000x1850x1025	-18 ~ -22	520	2.1	2800	220	Ventilated	Stainless steel



Model	Dimension (LxWxH mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m²)	Refrigeration Power (W)	Lighting Power (W)	Voltage (V)	Cooling Mode	Notes
SP-V12	1200x800x1950	2 ~ 10	520	2.2	920	240	220	Ventilated	Engine Inside
SP-V15	1500x800x1950	2 ~ 10	650	2.8	1100	240	220	Ventilated	Engine Inside
SP-V20	2000x950x1950	2 ~ 10	1000	3.6	1300	240	220	Ventilated	Engine Inside
SP-V25	2500x950x1950	2 ~ 10	1280	3.8	1500	360	220	Ventilated	Engine Inside
SP-V20S	2000x1100x2060	2 ~ 10	1300	4.5		240	220/380	Ventilated	Engine Inside
SP-V25S	2500x1100x2060	2 ~ 10	1680	4.9		360	220/380	Ventilated	Engine Inside

Model	Dimension (LxWxH mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m²)	Heating Power (W)	Lighting Power (W)	Voltage (V)	Cooling Mode	Notes
SP-V20T	2000x980x1650	2 ~ 10	860	2.5	1100	120	220	Ventilated	Engine Inside
SP-V25T	2500x980x1650	2 ~ 10	1100	3	1300	180	220	Ventilated	Engine Inside
PFG-20Y	2000x980x1650	2 ~ 10	860	1.8		120	220/380	Ventilated	Engine Inside
PFG-25Y	2500x980x1650	2 ~ 10	1100	2.5		180	220/380	Ventilated	Engine Inside

Cake Showcase



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight	Shelves
TCS - M9CD54	427	2~8	115	900x540x790	112kgs	2
TCS - M12CD54	518	2~8	155	1200x540x790	134kgs	2
TCS - M15CD54	530	2~8	200	1500x540x790	157kgs	2

CE



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight	Shelves
TCS - M9FD54	485	2~8	192	900x540x930	140kgs	3
TCS - M12FD54	598	2~8	260	1200x540x930	170kgs	3
TCS - M15FD54	626	2~8	330	1500x540x930	199kgs	3

CE



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight	Shelves
TCS - M9F54	420	2~8	140	900x540x790	90kgs	2
TCS - M12F54	550	2~8	190	1200x540x790	115kgs	2
TCS - M15F54	570	2~8	240	1500x540x790	120kgs	2

CE



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight	Shelves
TCS - M9F54H	467	2~8	192	900x540x930	95kgs	3
TCS - M12F54H	602	2~8	260	1200x540x930	115kgs	3
TCS - M15F54H	724	2~8	330	1500x540x930	130kgs	3

CE



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight	Shelves
TCS - M9C54	420	2~8	115	900x540x790	95kgs	2
TCS - M12C54	550	2~8	155	1200x540x790	115kgs	2
TCS - M15C54	570	2~8	200	1500x540x790	130kgs	2

CE

Cake Showcase



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight	Shelves
TCS - M9CS47	340	2~8	70	900x470x680	83kgs	2
TCS - M12CS47	472	2~8	94	1200x470x680	90kgs	2
TCS - M15CS47	492	2~8	118	1500x470x680	105kgs	2

CE



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight	Shelves
TCS - M9CS53	420	2~8	70	900x530x820	90kgs	2
TCS - M12CS53	550	2~8	94	1200x530x820	150kgs	2
TCS - M15CS53	570	2~8	118	1500x530x820	120kgs	2

CE



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight	Shelves
THCS - M9CD54	770	40~75	115	900x540x790	97kgs	2
THCS - M12CD54	810	40~75	155	1200x540x790	119kgs	2
THCS - M15CD54	850	40~75	200	1500x540x790	141kgs	2

CE



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight	Shelves
THCS - M9FD54	830	40~75	192	900x540x930	121kgs	3
THCS - M12FD54	890	40~75	260	1200x540x930	152kgs	3
THCS - M15FD54	950	40~75	330	1500x540x930	179kgs	3

CE



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight	Shelves
TCS - M9C54	765	40~75	115	900x540x790	95kgs	2
TCS - M12C54	805	40~75	155	1200x540x790	115kgs	2
TCS - M15C54	845	40~75	200	1500x540x790	120kgs	2

CE

Cake Showcase



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight (kgs)	Shelves
THCS-M9F54	765	40~75	140	900x540x790	80	2
THCS-M12F54	805	40~75	190	1200x540x790	95	2
THCS-M15F54	845	40~75	240	1500x540x790	110	2



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight (kgs)	Shelves
PCS-M9	540	2~8	319	900x700x1300	150	2
PCS-M12	683	2~8	407	1200x700x1300	173	2
PCS-M15	817	2~8	501	1500x700x1300	200	2

Color Available:



Black White



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight (kgs)	Shelves
FCS-M9C73	683	2~8	225	900x730x1200	200	3
FCS-M12C73	780	2~8	310	1200x730x1200	280	3
FCS-M15C73	937	2~8	395	1500x730x1200	320	3
FCS-M18C73	999	2~8	480	1800x730x1200	360	3
FCS-M24C73	1354	2~8	650	2400x730x1200	465	3

Color Available:



Yellow Green Red Black White



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight (kgs)	Shelves
FCS-M9C84	633	2~8	260	900x840x1200	200	3
FCS-M12C84	780	2~8	360	1200x840x1200	280	3
FCS-M15C84	937	2~8	460	1500x840x1200	320	3
FCS-M18C84	999	2~8	560	1800x840x1200	360	3
FCS-M24C84	1534	2~8	760	2400x840x1200	465	3

Color Available:



Yellow Green Red Black White



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight (kgs)	Shelves
FCS-M9C81	733	2~8	340	900x810x1200	200	4
FCS-M12C81	874	2~8	470	1200x810x1200	280	4
FCS-M15C81	968	2~8	600	1500x810x1200	320	4
FCS-M18C81	1145	2~8	730	1800x810x1200	360	4
FCS-M24C81	1384	2~8	990	2400x810x1200	465	4

Color Available:



Yellow Green Red Black White



Cake Showcase



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight (kgs)	Shelves
FCS-M9C75	644	2~8	349	900x750x1200	260	4
FCS-M12C75	847	2~8	400	1200x750x1200	847	4
FCS-M15C75	974	2~8	600	1500x750x1200	974	4
FCS-M18C75	1151	2~8	650	1800x750x1200	1151	4

Color Available:



Yellow Green Red Black White



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight (kgs)	Shelves
FCS-M9C79	581	2~8	270	900x790x1200	215	3
FCS-M12C79	718	2~8	375	1200x790x1200	255	3
FCS-M15C79	865	2~8	475	1500x790x1200	295	3
FCS-M18C79	960	2~8	575	1800x790x1200	335	3
FCS-M24C79	1282	2~8	780	2400x790x1200	415	3

Color Available:



Yellow Green Red Black White



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight (kgs)	Shelves
FCS-M9C78	583	2~8	269	900x780x1200	185	3
FCS-M12C78	712	2~8	372	1200x780x1200	225	3
FCS-M15C78	848	2~8	474	1500x780x1200	260	3
FCS-M18C78	909	2~8	576	1800x780x1200	300	3
FCS-M24C78	1247	2~8	781	2400x780x1200	380	3

Color Available:



Yellow Green Red Black White



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight (kgs)	Shelves
FCS-M9F68	626	2~8	285	900x680x1200	215	3
FCS-M12F68	769	2~8	390	1200x680x1200	260	3
FCS-M15F68	923	2~8	500	1500x680x1200	300	3
FCS-M18F68	990	2~8	610	1800x680x1200	345	3
FCS-M24F68	1314	2~8	825	2400x680x1200	435	3

Color Available:



Yellow Green Red Black White



Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (LxWxH mm)	Net Weight (kgs)	Shelves
FCS-M9F72	541	2~8	250	900x730x1200	215	2
FCS-M12F72	647	2~8	344	1200x730x1200	260	2
FCS-M15F72	706	2~8	438	1500x730x1200	300	2
FCS-M18F72	881	2~8	532	1800x730x1200	345	2
FCS-M24F72	1149	2~8	720	2400x730x1200	435	2

Color Available:



Yellow Green Red Black White



Wine Cooler



**Wine Cooler(Compressor)
WC-V208-84**

Dimension(mm): 598x605x1250
Ventilated
Capacity: 208L, 84 bottles
Temperature: 5~22°C
Power:120W
Packing Size: 660x640x1300mm
Weight: 73kg
Working Temperature: 0-38°C



**Wine Cooler(Compressor)
WC-V308-120**

Dimension(mm):598x605x1650
Ventilated
Capacity:308L, 120 bottles
Temperature:5~22°C
Power:165W
Packing Size: 660x640x1700mm
Weight: 88kg
Working Temperature: 0-38°C



**Wine Cooler(Compressor)
WC-V308-84**

Dimension(mm):598x605x1650
Cooling Mode:Static
Capacity:308L, 84 bottles
Temperature:5~22°C
Power:120W
Packing Size: 660x640x1700mm
Weight: 116kg
Working Temperature: 0-38°C




**Wine Cooler(Compressor)
WC-V960-280**

Dimension(mm):1250x650x2200
Cooling Mode:Ventilated
Capacity:960L, 280 bottles
Temperature:5~22°C
Power:380W
Packing Size: 1350x750x2320mm
Weight: 210kg
Working Temperature: 0-38°C



FB-07

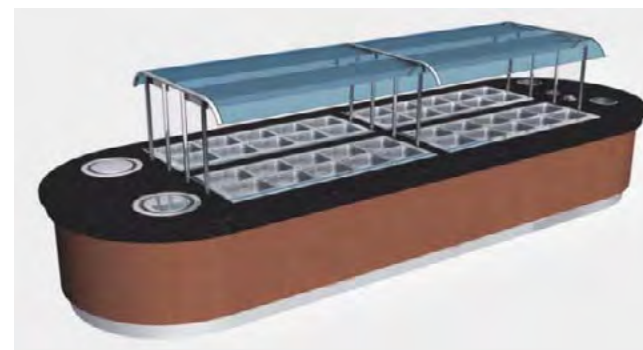

Cake Showcase & Ice Cream Showcase



**Chocolate Showcase
CS-ZCHO1**

Size(mm): 1130x850x900
Temperature: 2~8°C
Refrigerant: R134a
Voltage: 220v/50hz
Power(w): 500
Power consumption(kw/24h): 8.5
Capacity(L): 169

Computer delay protection,
Automatic Defogger with
humidification, 2 drawers



**Chocolate Showcase
CS-ZCHO2**

Size(mm): 1640x850x900
Temperature: 2~8°C
Refrigerant: R134a
Voltage: 220v/50hz
Power(w): 780
Power consumption(kw/24h): 12.5
Capacity(L): 268

Computer delay protection,
Automatic Defogger with
humidification, 3 drawers



**Chocolate Showcase
CS-ZCHO3**

Size(mm): 2150x850x900
Temperature: 2~8°C
Refrigerant: R134a
Voltage: 220v/50hz
Power(w): 1050
Power consumption(kw/24h): 16.6
Capacity(L): 360

Computer delay protection,
Automatic Defogger with
humidification, 4 drawers



**Sushi Showcase
SU-Z12**

Size(mm): 1200x376x385
Temperature: 2~8°C
Refrigerant: R134a
Voltage: 220v/50hz
Power: 450W
Power Consumption:
10.8kw/24h
Capacity: 75L

**Sushi Showcase
SU-Z15**

Size(mm): 1500x376x385
Temperature: 2~8°C
Refrigerant: R134a
Voltage: 220v/50hz
Power: 500W
Power Consumption:
12kw/24h
Capacity: 105L

**Sushi Showcase
SU-Z15**

Size(mm): 1800x376x385
Temperature: 2~8°C
Refrigerant: R134a
Voltage: 220v/50hz
Power: 600W
Power Consumption:
14.4kw/24h
Capacity: 131L



**Sushi Robot
SPJX-CD03**

Dimension:328x483x653mm
Voltage:AC100-230V,50/60hz,65w
Sushi Weight:18-20g
N.W:30Kg
700~300pcs can be produced
per hour



**Rice Sheet Robot
SPJX-CD02**

Dimension:392x591x699mm
Voltage:110V-240V
Power:50/60hz,150W
Weight:48kg
Compact and simple stype



**Rice Sheet Robot
SPJX-CD01**

Dimension: 392x591x699mm
Voltage: 100-230V/50/60Hz
Power:150W
Sushi Weight:70-90g(S),
120-150g(M),200-270g(L)
N.W: 66Kg



**Refrigerant Bain Marie
CKA-S01**

Main material:sus: 304
Size (LxWxH mm): 770x620x200
Type of cooling: Ventilated
Temperature: 2-8°C
Refrigerant Gas: R134a
GN:8x1/6x100mm



**Refrigerated Top
R60-2C**

Voltage:220V/50z
Power:350W
Capacity:2xGN1/1
N.W.:36kg
Size:1100x680x285mm



**Drop-in Refrigerated Well
ZCSB-XB157**

Power (kW) 0.38
Net Weight (KG) 50.0
Dimensions(mm) 1056x600x535
Cut-out dim(mm) 1016x569
Frequency 50Hz/60Hz
Voltage 220-240V

*Capable for 3 pcs 6" GN1/1 pans (not included)
*2-8°C
*Refrigerated wells with hole and water drain tap.