


Back Hoe

| Type | Fit Power (hp) | (Price in USD) | Remarks |
|-------|----------------|-----------------|---------|
| LW-4 | 12-15HP | USD1600 | |
| LW-5 | 15-25HP | USD1740 | |
| LW-6 | 25-30HP | USD1800 | |
| LW-7 | 35-50HP | USD1890 | |
| LW-8 | 50-80HP | USD2020 | |
| LW-9 | 60-100HP | USD2230 | |
| LW-10 | 70-120HP | USD2460 | |
| LW-12 | 80-150HP | USD2660 | |

All of them are with hydraulic pump/oil tank/gauge/hand control valve and overflow valve, if you need, we can equip the thumb (grabber claw) on arm.

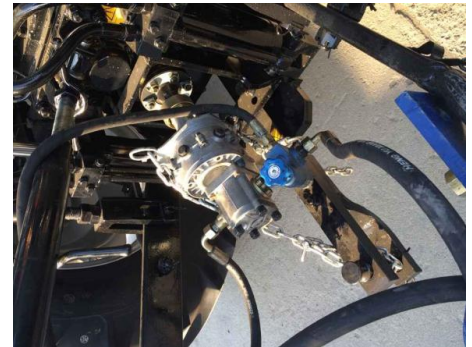

| Model | LW-5 | LW-6 | LW-7 | LW-8 | LW-9 | LW-10 | LW-12 |
|---------------------------|----------|----------|----------|----------|----------|----------|----------|
| Fitting power | 15-25hp | 16-35 hp | 25-75 hp | 45-85hp | 50-100hp | 70-125hp | 80-150hp |
| Max. digging depth | 1650 mm | 1850 mm | 2150 mm | 2640 mm | 2900 mm | 3000 mm | 3500 mm |
| Digging depth Flat bottom | 1450 mm | 1600 mm | 2000 mm | 2500 mm | 2760 mm | 2800 mm | 3350 mm |
| Max. digging height | 2100 mm | 2500 mm | 3400 mm | 3510 mm | 3900 mm | 4000 mm | 4300 |
| Loading heigh | 1300 mm | 1400 mm | 1760 mm | 2000 mm | 2362 mm | 2337 mm | 2700 |
| Unloading heigh | 1530 mm | 1733 mm | 1878 mm | 1952 mm | 2413 mm | 2540 mm | 2770 |
| Max. digging radius | 2300 mm | 2800 mm | 3360 mm | 3930 mm | 3977 mm | 3886 mm | 4300 |
| Bucket rotation (°) | 160° | 160° | 160° | 160° | 160° | 160° | 172° |
| Swing angle (°) | 140° | 140° | 140° | 140° | 160° | 160° | 180° |
| Valve standard press | 16 Mpa | 16 Mpa | 16 Mpa | 16 Mpa | 16 Mpa | 16 Mpa | 16 Mpa |
| Bucket width | 260 mm | 300 mm | 400 mm | 450 mm | 480 mm | 500 mm | 550 mm |
| Bucket volume | 0.028 m3 | 0.03 m3 | 0.036 m3 | 0.048 m3 | 0.054 m3 | 0.06 m3 | 0.07 m3 |
| Weight | 440 kgs | 520 kgs | 550 kgs | 610 kgs | 720 kgs | 850 kgs | 930 kgs |