



沧州盛世伟业汽车附件有限公司
CANGZHOU SHENGSHIWEIYE AUTOMOBILE ACCESSORY CO.,LTD

沧州盛世伟业汽车附件有限公司
CANGZHOU SHENGSHIWEIYE AUTOMOBILE ACCESSORY CO.,LTD

ADD: Cangzhou, Hebei, China

Tel: 0086-317-2049866

Fax: 0086-317-2049688

Mobile phone: 0086-13833970978

Website: www.wheelbalanceweights.com

www.ssqcpj.com

www.ssqp.net

www.tirechanger.com.cn

E-mail: info@ssqcpj.com



Brief introduction of enterprise

企业简介

沧州盛世伟业汽车附件有限公司成立于1992年九月，位于环渤海经济圈内、一代文宗纪晓岚故里、历史文化古城沧州，一尊铁狮雄震沧海铸就了沧州千年繁荣。沧州北邻京津，与京九、京沪、大广、石黄等多条国家高速铁路和公路干线毗邻，地理位置优越，交通便利。我们以沧州为源点，渤海为港湾，欢迎五洲四海各界朋友的到来！

公司总占地面积20000平方米，建筑面积8000平方米，拥有固定资产500万元，是目前国内最大的平衡块生产企业之一。公司专业生产各种类型、材质平衡块、车轮平衡块、气门嘴、胶条、胶片、车轮维修工具等轮胎用品，生产设备齐全，工艺先进。公司在原有铅质平衡块基础上根据国际、国内市场调查研发出锌质和铁质系列平衡块等系列产品，公司产品均已通过ISO9001和TS16949及英国“Intertek”生产企业深度认证，产品远销德国、英国、西班牙、葡萄牙、智利、俄罗斯、英国、加拿大等欧美国家和台湾、日本、新加坡、印度尼西亚、南非、中东等国家和地区，同时为国内一汽青岛、北汽福田、厦门金龙、金旅、苏州金龙、宇通、北京现代、合肥安凯、陕汽、正兴钢圈等诸多一线汽车制造厂和车轮厂实行配套服务，均以过硬的产品质量和优质的服务在客户和同行中为企业赢得了良好的口碑。

我们一直秉承敬业、务实的生产理念，追求创新、卓越的企业精神，定格诚信为天的宗旨不变，为广大客户提供更好、更优质的产品和服务，与新老朋友一起携手促进共同繁荣，为振兴汽车工业共展宏图！

Cangzhou Shengshiweiye Automobile Accessory Co.,Ltd —a real ,genuine and professtional wheel weight , tire valve , Car repair maintenance equipment and tyre consumables manufacturer in China . We are located in Xian county , Cangzhou City ,Hebei province .

Our company was founded in 1992, with total area 20000 square meters .Now we have 60 workers in our factory , 15 people in administration and technical administration . We export to a lot of countries all over the world , including Germany, Japan, France, Poland, South Korea, Australia,USA, Canada, UAE,Italy, Russia and so on .Our production line is to meet with the worldwide orders .

As increasing your profit and bring you a prosperous business, we can offer you best service .

- EXCELLENT QUALITY
- PUNCTUAL DELIVERY
- HONEST SERVICE
- COMPETITIVE PRICE
- PROFESSTIONAL QUALITY CONTROL



资质证书 INTELLIGENCE NORTHPLPEPAPER





铁质卡钩式平衡块 / Fe Clip On Wheel Weights

S-FE-001C	适用于多款轿车铝合金轮毂 静电喷涂处理
	规格 包装 5g ~ 30g 100个/盒 35g ~ 60g 50个/盒 Iron universal balance weight can be applied to most alloy rims Plastic coated Size in Gram Packing 5g ~ 30g 100pcs/box 35g ~ 60g 50pcs/box

S-FE-002C	表面镀锌 适用于FN系列轿车轮毂
	规格 包装 5g ~ 30g 100个/盒 35g ~ 60g 50个/盒 Iron universal balance weight can be applied to FN series car rims zinc plated Size in Gram Packing 5g ~ 30g 100pcs/box 35g ~ 60g 50pcs/box

S-FE-003C	静电喷涂处理 适用于多款轿车钢轮毂
	规格 包装 5g ~ 30g 100个/盒 35g ~ 60g 50个/盒 Iron universal balance weight can be applied to most steel rims Plastic coated Size in Gram Packing 5g ~ 30g 100pcs/box 35g ~ 60g 50pcs/box

S-FE-004C	静电喷涂处理 适用于多款轿车钢轮毂
	规格 包装 5g ~ 30g 100个/盒 35g ~ 60g 50个/盒 Iron universal balance weight can be applied to most steel rims Plastic coated Size in Gram Packing 5g ~ 30g 100pcs/box 35g ~ 60g 50pcs/box

铁质卡钩式平衡块 / Fe Clip On Wheel Weights

S-FE-005C	适用于多款轿车铝合金轮毂 静电喷涂处理
	规格 包装 5g ~ 30g 100个/盒 35g ~ 60g 50个/盒 Iron universal balance weight can be applied to most alloy rims Plastic coated Size in Gram Packing 5g ~ 30g 100pcs/box 35g ~ 60g 50pcs/box

S-FE-006C	适用于马自达轿车轮毂 静电喷涂处理
	规格 包装 5g ~ 30g 100个/盒 35g ~ 60g 50个/盒 Iron universal balance weight can be applied to Mazda steel rim Plastic coated Size in Gram Packing 5g ~ 30g 100pcs/box 35g ~ 60g 50pcs/box

S-FE-007C	EN系列平衡块适用于奥迪、宝马、本田、福特、大众、奔驰等轿车铝合金轮毂,表面进行静电喷涂处理
	规格 包装 5g ~ 30g 100个/盒 35g ~ 60g 50个/盒 The EN series balance weight is used on Audi, Mercedes Benz and early model Japanese auto with alloy wheels. powder coated. Size in Gram Packing 5g ~ 30g 100pcs/box 35g ~ 60g 50pcs/box

S-FE-008C	IAW系列平衡块适用于多款欧系及亚洲车系如奥迪、宝马、凯迪拉克、捷豹、起亚、尼桑、丰田、大众、沃尔沃等铝合金轮毂
	规格 包装 5g ~ 30g 100个/盒 35g ~ 60g 50个/盒 The IAW series is fitted on most European and Asian auto with alloy wheels like Audi, BMW, Csdillac, Jaguar, Kia, Nissan, Toyota, Volkswagen, Volvo: Epoxy polyester coating Size in Gram Packing 5g ~ 30g 100pcs/box 35g ~ 60g 50pcs/box



铁质卡钩式平衡块 / Fe Clip On Wheel Weights

S-FE-009C	AW系列平衡块适用于多款欧美车系铝合金轮毂 规格 包装 0.25oz ~ 1oz 100个/盒 1.25oz ~ 2oz 50个/盒 The AW series is fitted on Chrysler,Dodge,CM Surface:Epoxy polyester coating Size in Ounce Packing 0.25oz ~ 1oz 100pcs/box 1.25oz ~ 2oz 50pcs/box
	

S-FE-010C	P系列平衡块适用于普通轿车13"-15"钢轮毂 规格 包装 0.25oz ~ 1oz 100个/盒 1.25oz ~ 2oz 50个/盒 The P series is used on standard passenger car 13"-15" steel wheels Surface:Epoxy polyester coating Size in Ounce Packing 0.25oz ~ 1oz 100pcs/box 1.25oz ~ 2oz 50pcs/box
	

S-FE-011C	FN系列平衡块适用于多款日系车铝合金轮毂 规格 包装 0.25oz ~ 1oz 100个/盒 1.25oz ~ 2oz 50个/盒 The FN series is used on Japanese auto with alloy wheels like Honda,Toyota,Lexus,Nissan,Acura,Infiniti Surface:Epoxy polyester coating Size in Ounce Packing 0.25oz ~ 1oz 100pcs/box 1.25oz ~ 2oz 50pcs/box
	

S-FE-012C	MC系列平衡块适用于多款北美系车铝合金轮毂 规格 包装 0.25oz ~ 1oz 100个/盒 1.25oz ~ 2oz 50个/盒 The MC series is used on North America auto with alloy wheels Surface:Epoxy polyester coating Size in Ounce Packing 0.25oz ~ 1oz 100pcs/box 1.25oz ~ 2oz 50pcs/box
	

铁质卡钩式平衡块 / Fe Clip On Wheel Weights

S-HH-N2	适用于重型卡车7.0-8.0型号钢圈 规格: 50g-300g Used for duty truck,50g-300g
	

S-HH-N3	适用于真空胎、大巴车6.75-8.25x22.5型号钢圈 规格: 50g-300g Used for duty truck,50g-300g
	

S-HH-Q09	适用于金龙、沃尔沃客车及卡车8.5型号钢圈 规格: 50g-300g Used for duty truck,50g-300g
	

S-HH-Q01	适用于中巴车5.5-16,6.5-16型号钢圈 规格: 50g-300g Used for duty truck,50g-300g
	





铁质粘贴式平衡块 / Fe Stick On Wheel Weights

<p>S-FE-001A</p> 	<p>规格: 5gx12 厚度: 3.8mm 电镀锌 Fe Adhesive wheel weight 5gx12 segments Zinc Plated L x W x H:140x19x3.8mm Box Qty: 100 strips/box</p>
---	---

<p>S-FE-002A</p> 	<p>规格: 5gx4+10gx4 厚度: 4mm 表面处理: 电镀锌 Fe Adhesive wheel weight 5gx4+10gx4 segments Zinc Plated With Normal Blue Tape L x W x H:140x19x4mm Box Qty: 100 strips/box</p>
--	---

<p>S-FE-003A</p> 	<p>规格: 5gx12 厚度: 4mm 表面处理: 电镀锌 Fe Adhesive wheel weight 5gx12 segments Zinc Plated With Blue Easy-Peel Tape L x W x H:140x19x4mm Box Qty: 100 strips/box</p>
---	--

<p>S-FE-004A</p> 	<p>规格: 5gx4+10gx4 厚度: 4mm 表面处理: 电镀锌 Fe Adhesive wheel weight 5gx4+10gx4 segments Zinc Plated With Blue Easy-Peel Tape L x W x H:140x19x3.8mm Box Qty: 100 strips/box</p>
---	--

铁质粘贴式平衡块 / Fe Stick On Wheel Weights

<p>S-FE-005A</p> 	<p>规格: 5gx4+10gx4 厚度: 4mm 表面处理: 黑色喷涂 Black coating wheel weight with Blue Easy-Peel Tape 5gx4+10gx4, Thickness:4mm Surface:black coated Box Qty: 100 strips/box</p>
---	---


<p>S-FE-006A</p> 	<p>规格: 5gx4+10gx4 厚度: 4mm 表面处理: 静电喷涂 Fe Adhesive wheel weight 5gx4+10gx4 segments Epoxy Coated With Blue Easy-Peel Tape L x W x H:140x19x4mm Box Qty: 100 strips/box</p>
--	--

<p>S-FE-007A</p> 	<p>规格: 5gx12 厚度: 4mm 表面做静电喷涂 Fe Adhesive wheel weight 5gx12 segments Epoxy Coated With Normal Blue Tape L x W x H:140x19x4mm Box Qty: 100 strips/box</p>
---	--

<p>S-FE-008A</p> 	<p>规格: 5gx4+10gx4 厚度: 4mm 表面做静电喷涂 Fe Adhesive wheel weight 5gx4+10gx4 segments Epoxy Coated With Normal Blue Tape L x W x H:140x19x4mm Box Qty: 100 strips/box</p>
---	--



铁质粘贴式平衡块 / Fe Stick On Wheel Weights

S-FE-009A	
	<p>规格: 5gx12 厚度: 3.8mm 表面处理: 电镀锌 Universal adhesive wheel weight with blue tape, 5gx12 Surface: Zinc plated</p>

S-FE-010A	
	<p>规格: 2.5gx12 厚度: 2mm 表面处理: 电镀锌或者静电喷涂 Universal adhesive wheel weight with blue tape, 2.5gx12, thickness is 2 mm Surface: Zinc plated or Plastic coated</p>

S-FE-011A	
	<p>规格: 5g+10g+15g 厚度: 5mm 适用于摩托车, 表面镀锌或者静电喷涂 Iron adhesive wheel weight for motorcycle, 5g+10g+15g, thickness is 5 mm Surface: Zinc plated or Plastic coated</p>



**Easy-Peel
Extended Tape**



铁质粘贴式平衡块 / Fe Stick On Wheel Weights

S-FE-012A	
	<p>规格: 1/4ozx8 or 1/4ozx12 厚度: 5mm 表面做镀锌、静电喷涂或达克罗 Universal adhesive wheel weight with blue tape, 1/4ozx8 or 1/4ozx12, thickness is 3mm Surface: Zinc plated, Spray coated or Dacromet coated Box Qty: 50 or 48 strips/box</p>

S-FE-013A	
	<p>规格: 1/4ozx12 厚度: 4.8mm 表面处理: 静电喷涂 Fe Adhesive wheel weight 1/4ozx12 segments Surface: Epoxy coating L x W x H: 153x19x4.8mm Box Qty: 50 strips/box</p>

S-FE-014A	
	<p>规格: 1/2ozx6 or 1/2ozx8 厚度: 4.8mm 表面处理: 电镀锌 Fe Adhesive wheel weight 1/2ozx6 or 1/2ozx8 segments Surface: Zinc plated Box Qty: 50 or 35 strips/box</p>

S-FE-015A	
	<p>规格: 5gx1000, 5gx1200 厚度: 3.8mm 表面镀锌或者静电喷涂 Slim iron adhesive wheel weight individually separable with blue tape, 5gx1000, 5gx1200 thickness is 3.8 mm Surface: Zinc plated or Plastic coated</p>



铅质卡钩式平衡块 / Lead Clip On Wheel Weight

S-PB-001C	
	<p>适用于轿车钢轮毂 规格 包装 5g~30g 100个/盒 35g~60g 50个/盒 Universal balance weight for steel rims Size in GR Packing 5g~30g 100pcs/box 35g~60g 50pcs/box</p>


S-PB-002C	
	<p>适用于轿车铝合金轮毂 规格 包装 5g~30g 100个/盒 35g~60g 50个/盒 Balance weight for alloy rims Size in GR Packing 5g~30g 100pcs/box 35g~60g 50pcs/box</p>

S-PB-003C	
	<p>适用于轿车铝合金轮毂 规格 包装 5g~30g 100个/盒 35g~60g 50个/盒 Balance weight for alloy rims Size in GR Packing 5g~30g 100pcs/box 35g~60g 50pcs/box</p>

S-PB-004C	
	<p>适用于日系轿车铝合金轮毂 规格 包装 5g~30g 100个/盒 35g~60g 50个/盒 The "FN" series balance weight for Japanese with alloy rims mostly Nissan and Toyota Size in GR Packing 5g~30g 100pcs/box 35g~60g 50pcs/box</p>

铅质卡钩式平衡块 / Lead Clip On Wheel Weight

S-PB-005C	
	<p>专用于车轮动平衡机 规格 包装 100g 50个/盒 Special balance weight for wheel balancer Size in GR Packing 100g 50pcs/box</p>

S-PB-006C	
	<p>适用范围：卡车铝合金轮毂 规格：50, 100, 150, 200, 250, 300, 350, 400, 450, 500g 表面处理：原色或静电喷涂 Pb clip-on wheel weight for Truck Surface: Uncoated or Coated Sizes in Gram 50g~500g</p>

S-PB-007C	
	<p>专用于日系本田轿车铝合金轮毂 规格： 包装 5g~30g 100个/盒 35g~60g 50个/盒 Applied for Japanese auto ,Honda Size in Gram Packing 5g~30g 100pcs/box 35g~60g 50pcs/box</p>


S-PB-008C	
	<p>适用范围：8.25 x 22.5型号钢圈 规格：50, 80, 100, 150, 200, 300g 表面处理：静电喷涂 Lead/pb clip on wheel weight for truck Spec:50, 80, 100, 150, 200, 300g Surface:Uncoated or Coated</p>



铅质卡钩式平衡块 / Lead Clip On Wheel Weight

S-PB-009C	
<p>适用范围: 沃尔沃系列客车及卡车 规格: 50, 100, 150, 200, 250, 300, 350, 400, 450, 500g 表面处理: 静电喷涂 Lead/pb clip on wheel weight for bus Spec:50,100,150,200,250,300,350,400,450,500g Surface:Uncoated or Coated</p>	

S-PB-010C	
<p>适用范围: 厦门金龙、苏州金龙及卡车 规格: 50, 100, 150, 200, 250, 300, 350, 400, 450, 500g 表面处理: 静电喷涂 Lead/pb clip on wheel weight for bus Spec:50,100,150,200,250,300,350,400,450,500g Surface:Uncoated or Coated</p>	

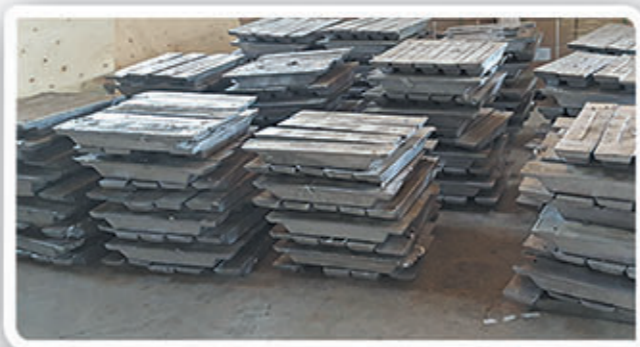

铅质粘贴式平衡块 / Lead Stick On Wheel Weight

S-PB-001A	
<p>适用于轿车铝合金轮毂 规格: 5gx4+10gx4 尺寸: 105x18x4mm Universal adhesive wheel weight with blue tape, 5gx4+10gx4,size is 105x18x4mm</p>	

S-PB-002A	
<p>适用于轿车铝合金轮毂 规格: 5gx4+10gx4 尺寸: 109x15x5mm Universal adhesive wheel weight with blue tape, 5gx4+10gx4,size is 109x15x5mm</p>	

S-PB-003A	
<p>适用于轿车铝合金轮毂 规格: 1/4ozx12 尺寸: 155x19x3.0mm Pb Adhesive wheel weight 1/4ozx12 segments Surface: Uncoated or Coated L x W x H: 155x19x3.0mm Box Qty: 48 strips/box</p>	

S-PB-004A	
<p>适用于轿车铝合金轮毂 规格: 5gx12 尺寸: 102x18x4mm Slim adhesive wheel weight with blue tape, 5gx12,size is 102x18x4mm</p>	

→ 红胶、蓝胶、3M胶 Red Tape, Blue Tape, 3M Tape






铅质粘贴式平衡块 / Lead Stick On Wheel Weight

S-PB-005A		<p>中巴、大巴车轮毂用平衡块 规格:30g,50g,100g 表面做环氧树脂喷涂处理 universal wheel weights for Bus and truck Spe.:30g,50g,100g Surface:Coated or Uncoated</p>
------------------	---	--

S-PB-006A		<p>Pb Adhesive wheel weight 1/2ozx12 segments Surface:Uncoated or Coated LxWxH:190x19.3x4mm Box Qty:26 strips/box</p>
------------------	--	---

S-PB-007A		<p>摩托车用粘贴式平衡块 Pb Adhesive wheel weight (5g+10g)x6 segments 20gx10 segments Surface:Uncoated or Coated Box QTY:20 strips/box</p>
------------------	---	---

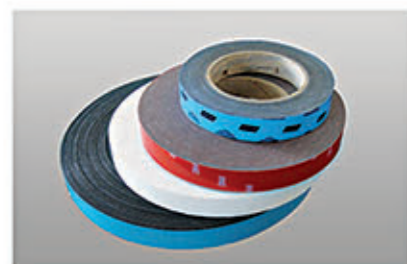

We are prepared 4 kinds of adhesive tapes for you choices

- Norton adhesive tape
- 3M Red adhesive tape
- White adhesive tape
- Blue adhesive tape

Also, the adhesive tape Available in easy-peel




wheel weight removal tool
平衡块铲

锌质粘贴式平衡块 / Zinc Stick On Wheel Weight

S-ZN-001C		<p>静电喷涂处理适用于多款轿车钢轮毂 规格 包装 5g-30g 100个/盒 35g-60g 50个/盒 Zinc universal balance weight can be applied to most steel rims Plastic coated Size in GR Packing 5g-30g 100pcs/box 35g-60g 50pcs/box</p>
------------------	---	---

S-ZN-002C		<p>静电喷涂处理适用于多款轿车铝合金轮毂 规格 包装 5g-30g 100个/盒 35g-60g 50个/盒 Plastic coated Zinc universal balance weight can be used to most alloy rims Size in GR Packing 5g-30g 100pcs/box 35g-60g 50pcs/box</p>
------------------	--	--

S-ZN-003C		<p>AW系列平衡块适用于多款欧美系轿车铝合金轮毂 规格 包装 0.25oz-1oz 100个/盒 1.25oz-2oz 50个/盒 2.25oz-3oz 25个/盒 The AW series Zinc balance weight is for American alloy rims Size in Ounce Packing 0.25oz-1oz 100pcs/box 1.25oz-2oz 50pcs/box 2.25oz-3oz 25pcs/box</p>
------------------	---	--

S-ZN-004C		<p>P系列平衡块适用于多款欧美系轿车钢轮毂 规格 包装 0.25oz-1oz 100个/盒 1.25oz-2oz 50个/盒 2.25oz-3oz 25个/盒 The P series Zinc balance weight is for American steel rims Size in Ounce Packing 0.25oz-1oz 100pcs/box 1.25oz-2oz 50pcs/box 2.25oz-3oz 25pcs/box</p>
------------------	---	--



锌质粘贴式平衡块 / Zinc Stick On Wheel Weight

S-ZN-001A	
	<p>规格: 5gx4+10gx4 尺寸: 150x18x3.8mm universal zinc balance weight individually separable with blue tape,3M tape 5gx4+10gx4 Size:150x18x3.8mm</p>

S-ZN-002A	
	<p>规格: 5gx4+10gx4 尺寸: 150x18x3.8mm The "KS" series balance weight individually separable for french alloy rims 5gx4+10gx4 Size:150x18x3.8mm</p>

S-ZN-003A	
	<p>规格: 5gx12 尺寸: 153x18x3.8mm universal zinc balance weight individually separable with blue tape,3M tape 5gx12 Size:153x18x3.8mm</p>

S-ZN-004A	
	<p>规格: 1/4ozx12 厚度: 3.8mm 表面处理: 静电喷涂</p> <p>Spec: 1/4ozx12 Size: 3.8mm thickness Surface: Epoxy polyester coating</p>



OUR CUSTOMERS





刹车片配重块 / Balance Weight For Brake Pads

S-BW-001



刹车片配重块
型号: MB1350-RH,MB1350-LH
Balance weights for Brake Pads
Spec.:MB1350-RH,MB1350-LH

S-BW-002



刹车片配重块
型号: MB1450-RH,MB1450-LH
Balance weights for Brake Pads
Spec.:MB1450-RH,MB1450-LH

S-BW-003



刹车片配重块
型号: MB1373-RH,MB1373-LH
Balance weights for Brake Pads
Spec.:MB1373-RH,MB1373-LH

S-BW-004



刹车片配重块
型号: MB1372-RH,MB1372-LH
Balance weights for Brake Pads
Spec.:MB1372-RH,MB1372-LH

轿车、轻乘等无内胎真空咀系列 / Passenger Car&Light Tubeless Tire Valves

嵌入式气门嘴 (橡胶) Snap-In Tubeless Truck Tire Valves



TECHNICAL DATA 技术参数								
TR NO.	Eltra no.(ref.no.)	Rim hole	Eff.length(Mm)	Parts		A	B	C
				Core	Cap			
TR412	V2.03.6	11.5(.153" dia)	22			33	22	15
TR413	V2.03.1	11.5(.453" dia)	30			42.5	32	15
TR414	V2.03.2	11.5(.453" dia)	38			48.5	38	15
TR414L	V2.03.8	11.5(.453" dia)	45	9002#	Vc8	56.5	46	15
TR418	V2.03.4	11.5(.453" dia)	49			61.5	51	15
TR415		11.5(.453" dia)	62			74	63.5	15
TR423	V2.03.3	16(.625" dia)	30			42.5	32	19.2
TR425		16(.625" dia)	49			61.5	51	19.2
TR438	V2.03.5	8.8(.346" dia)	32			40.5	31	11

气门嘴 Decorate Sleeve & Cap Rubber Tire Valve

无内胎轮胎真空咀 (镀铬)
Tubeless tire valves,chromed straight type

无内胎轮胎真空咀 (镀铬-喇叭状)
Tubeless tire valves,chromed loudhailer type





气门嘴系列 / Tire Valves For Tubeless Tire&Truck

彩色铝合金气门嘴 / Colorful Aluminum Sleeve&Caps Rubber Tire Valve



TR413C-Y TR413C-P TR413C-R TR413C-B TR413C-G TR414C-Y TR414AC-P

气门嘴系列 / Clamp-In Valves

欧美市场密封式气门嘴
European style o-ring seal clamp-in valves



V3.20.7-C V3.20.4-C V3.20.6-C V3.20.1 V3.20.3 V3.20.4 V3.20.6

无内胎全钢气门嘴一卡、客车用
Tubeless metal clamp-in valves for truck & bus



TR575 TR500 TR570 TR571 TR572 TR573 TR574

气门嘴系列 / Tire Valves For Tubeless Tire&Truck



V-3(TR33E) V-4(TR43E) V-5(TR48E) VS-6 VS-8 VS-8-45 VS-8-90



TMP-01 TMP-02 TMP-03 TMP-04 TMP-05 TMP-06 TMP-07



MS525S MS525L MS525AL MS525AL(black)


TECHNICAL DATA 技术参数			
TR NO	Rim hole	L	R
MS525S	.453" 11.3mm	41.5	17.5
MS525L	.453" 11.3mm	41.5	17.5
MS525AL	.453" 11.3mm	42	17
MS525AL(black)	.453" 11.3mm	42	17



PVR30 PVR32 PVR70 TR220A TR218A TR13 TR15



胶条、胶片系列 / Tire Seal String & Tire Patches

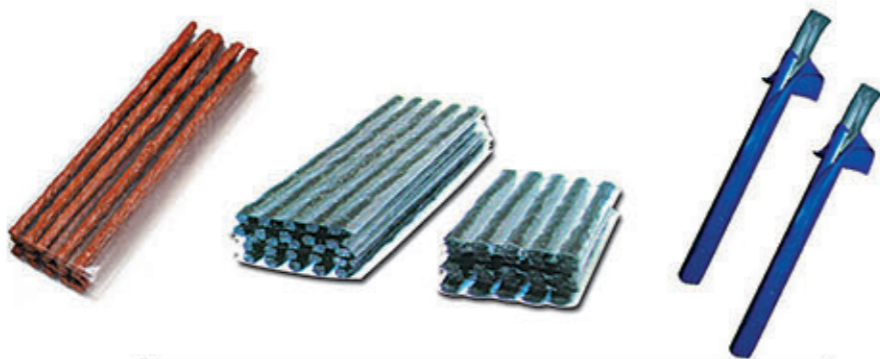

胶条

TECHNICAL DATA 技术参数			
ITEM NO	Color	Length (inches)/(mm)	Diameter(mm)
S-BR-S1	Brown	4/102	4
S-BR-S2	Brown	4/102	6
S-BR-L1	Brown	8/204	4
S-BR-L2	Brown	8/204	6
S-BL-S1	Black	4/102	4
S-BL-S2	Black	4/102	6
S-BL-L1	Black	8/204	4
S-BL-L1	Black	8/204	6



胶片

内胎贴片 Patches for inner tyre		
ITEM NO	Size	Packing
S-TR1	52mm	16pcs+glue19cc/box
S-TR2	40mm	25pcs+glue19cc/box
S-TR3	30mm	36pcs+glue19cc/box
S-TR6	25mm	64pcs+glue19cc/box
S-TS1	70x40mm	15pcs+glue19cc/box
S-TS2	50x32mm	24pcs+glue19cc/box
S-TS4	34x24mm	48pcs+glue19cc/box

真空胎贴片 Patches for vacuum tyre		
ITEM NO	Size	Packing
S-WD-30	30mm	150pcs/box
S-WD-40	40mm	100pcs/box
S-WD-52	52mm	64pcs/box
S-WD-75	75mm	36pcs/box

子午线胎贴片 Patches for radial tyre		
IT NO	Size	Packing
S-JQ-75	75X55mm	20pcs/box

密封垫片 / Shims



STAINLESS STEEL SHIM-SS304		
Slot size(mm)	Shims size(mm)	Thickness(mm)
16	50x50	0.05mm~3mm
22	75x75	0.05mm~3mm
32	100x100	0.05mm~3mm
45	125x125	0.05mm~3mm
50	150x150	0.05mm~3mm
55	200x200	0.05mm~3mm

STAINLESS STEEL SHIM-SS301	
Shims size(mm)	Thickness(mm)
24X38	1mm~4mm
30X40	1mm~4mm

偏心螺丝 / Eccentric Screw



TECHNICAL DATA 技术参数			
ITEM NO.	Diameter(mm)	Length (mm)	Weight(g)
S-PX-10	10	72	75
S-PX-12	12	80	88
S-PX-13	13	83	95
S-PX-14	14	85	105
S-PX-14.2	14.2	85	105
S-PX-16	16	90	130
S-PX-17	17	93	166

汽车轮胎工具 / Auto Tire Tools



延长杆
Flexible Extension



汽车轮胎工具 / Auto Tire Tools

S-T001



两头工具
Double-head Valve Core Screw

S-T002



一头工具
Single-head Valve Core Screw

S-T003



气门嘴拉拔杆
Valve Puller

S-T004



压轮
Ball Bearing Stitcher

S-T005



补胎工具1
Tire Repair Tool1

S-T006



补胎工具2
Tire Repair Tool 2

S-T006-A



补胎工具3
Tire Repair Tool 3

S-T007



平衡钳
Wheel Weight Plier

S-T008



击杆
Tire Changing Tool

S-T009



压条取出器
Tyre Layering Extractor

S-T010



拖车棒
Car Tow Bar

S-T011



轮胎撬板
Tire Lever

S-T012



套筒
Sockets

汽车轮胎工具 / Auto Tire Tools

S-T013



刹车分泵调整组 (单泵)
12 Pcs Caliper Wind Back Kit

S-T014



刹车分泵调整组 (双泵)
Positive & Negative Caliper Wind Back Kit(23pcs)

S-T015



全铝机油各扳手
Aluminum Oil Filter Wrench Kit

S-T016



万能拉玛
Two Sets Bearing Separator Kit

S-T017



防震充气测压表
Shockproof Tire Inflating Gauge

S-T018



数显充气测压表
Digital Tire Inflating Gauge

S-T019



充气测压表
Tire Gauge Inflator

S-T020



充气杆
Tire Pressure Gauge

S-T021



轮胎测压尺
Pencil Tire Pressure Gauge

S-T022



十字扳手
Cross Wrench

S-T023



三爪机油格扳手
3 Paws Oil Filter Wrench

S-T024



皮带式机油格扳手
Belt Type Oil Filter Wrench

S-T025



链条式机油格扳手
Chain Type Oil Filter Wrench

S-T026



烤漆灯
Shortwave Infrared Heating Lamp

S-T027



烤漆灯
Shortwave Infrared Heating Lamp

S-T028



烤漆灯
Shortwave Infrared Heating Lamp

S-T029



烤漆灯
Shortwave Infrared Heating Lamp



汽车轮胎工具 / Auto Tire Tools

S-T030



修车版
Car Creeper

S-T031



S-T032



充气泵
Tire Inflator

S-T033



全自动立式充气放气机
Standing Automatic Tire Inflating Machine

S-T034



弹簧拆装器
Drop Forged Coil Spring Compressor

S-T035



圆形油盆
Round Oil Pan

S-T036



矩形油盆
Rectangle Drain Pan

S-T037



带手柄油盆
Oil Pan With Handle

S-T038



接油机
Waste Oil Drain Collector

S-T039



S-T040



车轮挡
Rubber Wheel Chock

S-T041



车轮止滑器
Rubber Wheel Chock

S-T041-A



车轮挡
Plastic Wheel Chock

S-T041-B



车轮挡支架
Wheel Chock Holder

S-T042



斜坡
Car Ramp

S-T043



汽车轮胎工具 / Auto Tire Tools

S-T044



千斤顶
Pneumatic Hydraulic Jack

S-T044-A



S-T045



卧式千斤顶
Floor Jack

S-T046



剪式千斤顶
Scissor Jacks

S-T047



高压充气罐
Tire Bead Seater

S-T048



S-T049



S-T050



S-T051



S-T052



真空胎手动拆装工具
Vacuum Tire Removal Tools

S-T053



S-T054



S-T055



真空胎手动拆装工具
Vacuum Tire Removal Tools

S-T056





汽车轮胎工具 / Auto Tire Tools

S-T057-A



真空胎硫化机
Tire Vulcanizer

S-T057-B



气动真空胎硫化机
Pneumatic Tyre
Vulcanizing Machine

S-T058



大车胎硫化机
Truck Tyre
Vulcanizing Machine

S-T059



定时温控补胎机
Temperature-Control
Timing Vulcanizing Machine

2200LBS SPRING
COMPRESSOR
MAX. SPRING DIAMETER: 2200LBS
COMPRESSED SPRING DIAMETER: 400mm
COMPRESSION LENGTH: 210-570mm
QTY IN 20' CONTAINER

ITEM	WEIGHT	G.W./N.W.	WEIGHT	PACKING SIZE
81402	27KG	27KG/26KG	27KG	82x40x18cm
81403	39KG	39KG/34KG	39KG	118x31x20cm

S-T060



S-T061



S-T062



弹簧拆装机
Shock Absorption Spring Compressor

吊机 / Crane



2T 3T OPTIONAL



拆胎机 / Tire Changer

S-T886H

TECHNICAL DATA 技术参数		
电源电压	Power Supply Voltage	220V/50-60Hz 380V/50Hz
功率	Motor Power	1.1Kw
工作气压	Working Operation Pressure	8-10bar
轮辋直径	Rim Diameter	26" /1100mm
轮辋宽度	Rim Width	16" /410mm
净重	N.W.	391kg
毛重	G.W.	431kg



S-T620

TECHNICAL DATA 技术参数		
外夹轮辋	Rim Clamping Outer	10" -22"
内夹轮辋	Rim Clamping Inner	12" -24"
最大车轮直径	Max Tyre Diameter	1100mm/43"
最大车轮宽度	Max Tyre Width	380mm/13"
工作气压	Working Air Pressure	3.5 bar
胎边压力	Bead Breaker Cylinder Force	2500kg
电压	Power Supply	220V/380V
点动功率	Motor Power	1.1kw/0.75kw
净重	N.W.	190kg
包装尺寸	Dimension	1070*840*900



卡车拆胎机 / Truck Tire Changer



S-T588

TECHNICAL DATA 技术参数		
轮胎直径	Rim Diameter	19" - 26"
最大车轮重量	Max.Wheel Weight	380kg
最大车轮宽度	Max.Wheel Width	470mm
最大轮胎直径	Max Tyre Diameter	1400mm
液压动力单元	Hydraulic Pump Motor	3.3KW 380V - 3PH - 50HZ
设备净重	Machine Weight Approx	485kg

CHARACTERISTICS 产品特点	
Hydraulic motor system tyre operation much more powerful;	
• Automatic hydraulic mounting arm finds precise angle;	
• Double pressing roller suitable for different sizes of tubeless tyre;	
• This vertical truck tyre changer saves more space and works more efficiency;	
• 采用液压马达传动系统驱动, 使拆装轮胎更有力;	
• 自动伸缩拆胎臂, 让拆装轮胎角度更准确;	
• 针对不同的轮胎, 配有双压滚;	
• 立式拆胎机占地面积小拆装速度快;	

卡车拆胎机 / Truck Tire Changer

S-T568



TECHNICAL DATA 技术参数		
轮胎直径	Rim Diameter	16" - 26"
最大车轮重量	Max.Wheel Weight	50kg
车轮宽度	Max.Wheel Width	780mm
最大轮胎直径	Max.Wheel Dia	1600mm
液压动力单元	Hydraulic Pump Motor	1.5kw 380v---3ph(220v optional)
齿轮箱电机	Gearbox Motor	1.8kw 380v---3ph(220v optional)
胎边压力	Bead Breaker Force	2500kg
移动式控制手电压	Operation Control Voltage	24v
电压	Power	220V/400V 50/60HZ 3PH/3PH Optional

WEIGHT&DIMENSIONS 重量&包装尺寸		
设备净重	Machine Weight Approx	568kg
设备占地面积	Overall Dimensions Approx	2500x2000mm
Model	Gross Weight (kg)	Outside Dimension LxWxH(mm)
S-T568	647	2030x1600x1000

S-TY008

TECHNICAL DATA 技术参数		
轮胎直径	Rim Diameter	13" - 26"
最大轮胎重量	Max.Wheel Weight	700kg
最大轮胎宽度	Max.Wheel Width	600mm
最大轮胎直径	Max Tyre Diameter	1300mm
液压动力单元	Hydraulic Pump Motor	1.1KW
齿轮箱电机	Gearbox Motor	1
胎边压力	Bead Breaker Force	2500kg
电压	Power	220/400V 50/60HZ 1P/3P 可选
机器底座上的门最大高度	Min.height of Machines Chassis to the Top of the Door	1450mm
内范最大宽度	Min. width of Inner Van	1650mm
门最大宽度	Min.Width of Door	980mm
厢式货车厚度	Thickness of Van	<=160mm
车辆到地面的底盘	Chassis of Van to Floor	~700mm

CHARACTERISTICS 产品特点	
• TY008是一款电动液压拆胎机适用于卡车、客车等轮胎	
• 此设备适用于移动式紧急救援服务	
• 可配发电机	
• 意大利可选	
• TY008 is an electro hydraulic tyre changer for trucks, buses and tractors	
• Equipment with a powder generator optional	
• TY008 can be run in the workshop and is suitable for mobile service	
• Italian pump optional	



S-T980

TECHNICAL DATA 技术参数		
轮胎直径	Rim Diameter	14" - 46"
轮胎最大直径 (带延伸)	Rim Capacity (With Extensions)	14" - 56"
最大车轮重量	Max.Wheel Weight	2000kg
最大车轮宽度	Max.Wheel Width	1200mm
最大轮胎直径	Max Tyre Diameter	2500mm
液压动力单元	Hydraulic Pump Motor	3.3/4.0KW
齿轮箱电机	Gearbox Motor	3.3/4.0KW
设备净重	Machine Weight Approx	1175kg
电压	Power	400V 50HZ 3PH

CHARACTERISTICS 产品特点	
• T980 super truck tyre changer has been specifically designed to mount and demount tyres from trucks,bus,tractors and earthmoving vehicles	
• Rim capacity 14" - 56"	
• Bi-Directional Chuck with 2 rotational speeds	
• Italian pump optional	
• 适用于卡车、客车、拖拉机、工程车等轮胎	
• 轮胎直径 14" - 56"	
• 双速	
• 意大利泵可选	





平衡机 / Wheel Balancer


TECHNICAL DATA 技术参数		
轮辋直径	Rim Diameter	13" - 24"
轮辋宽度	Rim Width	5.5 - 20"
最大车轮重量	Max.Wheel Weight	150kg
最大车轮宽度	Max.Wheel Width	1200mm
气压	Air Pressure	6 - 8 bar
测试时间	Testing Time	8s
车轮保护罩	Protection Cover	supplied
气动举升车	Pneumatic Built-in Lift	supplied
设备净重	Machine Weight Approx	250kg
设备占地面积	Overall Dimensions Approx	2000 × 15000mm
电压	Power Supply	400V/220V
标准配件 Standard Accessories (supplied) International universal standard flange tapering (diameter range 40-285mm) wheel width calipers, lock nut Wheel ballast weight pliers		
CHARACTERISTICS 产品特点		
<ul style="list-style-type: none"> • 轮胎的升降与装卸做到轻而易举, 附带的保护杠安全可靠。 • 由集成电路组成的轴处理高精度, 高稳定可实现大小车换转, 适用于卡车, 客车, 轿车和摩托车轮胎的平衡。 • 精密加工的平衡主轴, 是平衡机对车轮进行高精度平衡的根本保证, 特为您平衡大轮辋的轮胎而特别设计。 		
<p>Easy operation of lifting device and mount- demount tyre with protection cover, well- consideration safety and stable.</p> <p>The microprocessor is composed of integrate circuit, with high- capacity and high- stability can realize the converting of big or small model wheels, suitable for trucks, buses, cars and motorcycle wheels.</p> <p>Tyre high precise balance operation thanks to its precise balancing spindle special design for balancing tyre with big rim hole.</p>		



S-CB1200

四轮定位 / Wheel Alignment

S-V3D-SL超值版

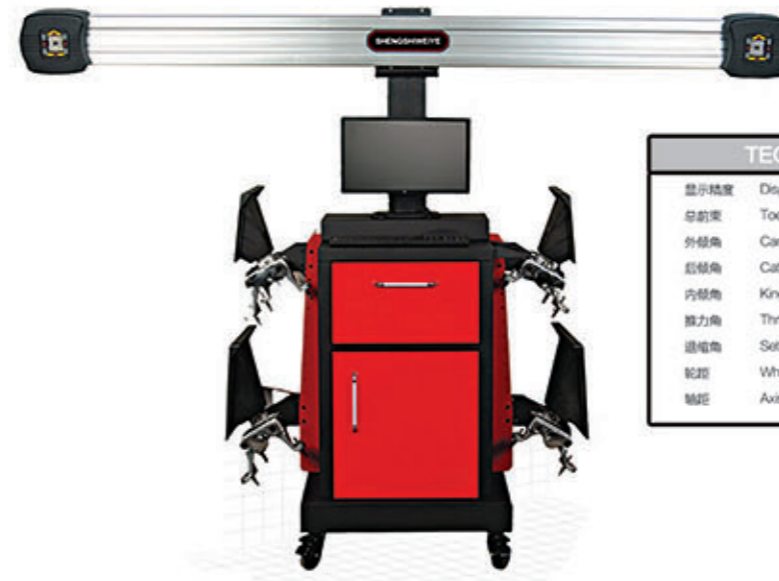

TECHNICAL DATA 技术参数			
显示精度	Display Accuracy	0.01mm/0.01°	-
总前束	Toe-In&Toe-Out	+_- 0.01°	+_-20°
外倾角	Camber	+_- 0.01°	+_-30°
后倾角	Caster	+_- 0.02°	+_-30°
内倾角	Kingpin Inclination	+_- 0.02°	+_-30°
推力角	Thrust Angle	+_- 0.01°	+_-30°
退锥角	Set Back	+_- 0.01°	+_-20°
轮距	Wheel Deviation	+_-2mm	1219-2438mm
轴距	Axis Deviation	+_-2mm	2006-4572mm

S-GEO988



TECHNICAL DATA 技术参数		
轮辋直径	Rim Diameter	16" - 24"
轮辋宽度	Rim Width	5.7 - 20"
最大车轮重量	Max.Wheel Weight	200kg
最大车轮直径	Max.Wheel diameter	1250mm
气压	Air Pressure	8 - 10 bar
测试时间	Testing Time	12- 20s
车轮保护罩	Protection Cover	Supplied
气动举升车	Pneumatic Built-in Lift	Supplied
电压	Power Supply	220V 50Hz 1PH
CHARACTERISTICS 产品特点		
<ul style="list-style-type: none"> • 超大清晰LED显示 • 高精度主轴方便快捷平衡车轮 • 安全设置, 设备装有制动开关, 轮胎落到一定位置, 电机开始启动 • 专业用于卡客车轮胎平衡, 铝合金轮毂可用 • Keypad control panel with bright LED displays indicate 2 weight amounts, 2 weight locations, 3D rim dimension data entry and 3 selection balance mode. • Precise wheel clamping system flange, easy and fast to fix the wheel on the measuring. • Balancer axle. Safety set with microswitch the wheel cover is on position then the wheel begins to rotate. 		

S-TV3D-AL自动升降板



TECHNICAL DATA 技术参数	
辅助泊车摄像系统, 消除了车辆上举升机需要他人协助的烦恼; Auxiliary parking camera system: indicative light around camera could guide the operation, parking on the lifts, no need the help of other person.	
轮胎大小	Rim size: 10" - 22"
电源要求	Power requirement: 200V-240V, 1 phase, 50/60Hz



双柱举升机 / Two Post Lift

TECHNICAL DATA 技术参数		
额定载荷	Lifting Capacity	4000kg
举升高度	Max Lifting Height	1800mm
上升时间	Lifting Time	55/6s
下降时间	Lowering Time	50/5s
额定功率	Rated Power	2.2kw
额定电压	Rated Voltage	220v/380v
额定压力	Rated Pressure	21Mpa
立柱高度	Column Height	2794mm
柱间宽度	Width Between Column	2900mm
总宽度	Total Width	3445mm



地藏剪式举升机 / Full-Rise Scissor Lift



TECHNICAL DATA 技术参数		
额定载荷	Lifting Capacity	3500kg
举升高度	Lifting Height	1800mm
举升时间	Lifting Time	60s-65s
下降时间	Lowering Time	45s-55s
平台高度	Platform Height	2035mm
平台宽度	Platform Width	650mm
额定功率	Rated Power	2.2kw
额定电压	Power Voltage	220/380v
额定压力	Rated Pressure	18MPa

超薄剪式举升机(子母剪) / Alignment Scissor Lift



TECHNICAL DATA 技术参数										
额定载荷	机器重量	举升高度	最低高度	举升时间	下降时间	平台长度	平台宽度	电机功率	电源	气压
Lifting Capacity	Machine Weight	Lifting Height	Min Height	Lifting Time	Lowering Time	Platform Length	Platform Width	Motor Power	Power Supply	Air Supply
3000kg	1700kg	1800mm	330mm	50s	40s	4200mm	600mm	2.20.0kw	220/380v	0.6-0.8MPa

双柱龙门举升机 / Clear Floor Two Post Lift

TECHNICAL DATA 技术参数		
额定载荷	Lifting Capacity	4000kg
举升高度	Max Lifting Height	1800-1900mm
上升时间	Lifting Time	55/6s
下降时间	Lowering Time	60/6s
额定功率	Rated Power	2.2kw
额定电压	Rated Voltage	220v/380v
额定压力	Rated Pressure	21Mpa
立柱高度	Column Height	3655-3905mm
柱间宽度	Width Between Column	2910mm
总宽度	Total Width	3484mm

